



| Mark | Date | Reason for revision | In chrge | Approve |
|---|---|---|---|---|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |
| 4 | | | | |

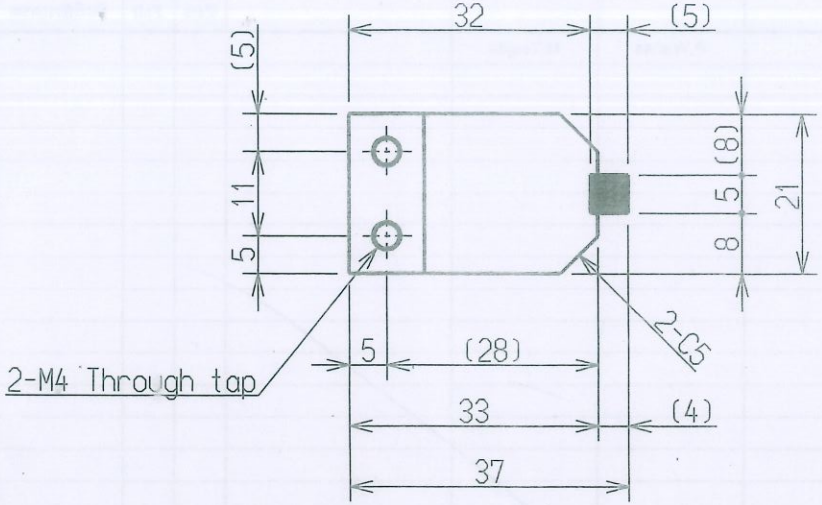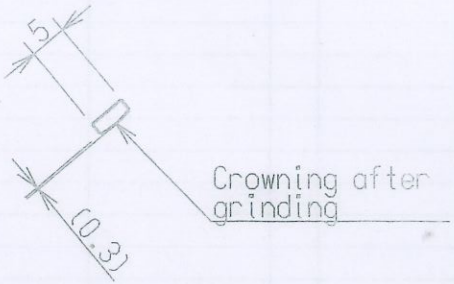


View A(1:1)

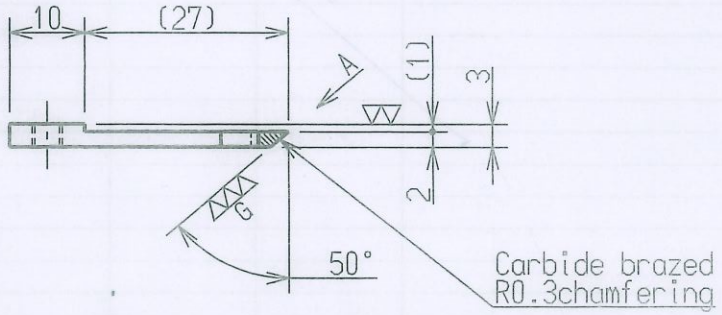


出図
2022/11/17
東振テクニカル

Note

Carbide Material as per
V1 class of JIS Standard

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | Material | SS400 | Drawn | OKAZAKI | Code | |
| | | | Heat treatment | | Designed | IMURA | Name | Work Pusher |
| | | | Surface hardness | HRC | Checked | NOMURA | Drawing No. | LD-AS06-D-01 |
| TO-50AR | LD-AS06-D-00-01 | 1 | Surface treatment | | Approved | INABA | | |
| Applicable machine model | Applicable unit/assembly drawing | Q'ty | Chamfer corners to C0.5 unless otherwise specified | | Date | 12.06.08 | Scale | 1:1 |

Revision

Page

TOKUSHIN