MC1000 SERIES

HANDHELD DIGITAL THERMOMETER

PERFORMANCE SPECIFICATION CHINO

MC1000 is handheld digital thermometer having easy-to-read large LCD display and lighter in weight. Temperature probes having variety of shapes and sizes enable you to select a suitable one on your application demand.



■FEATURES

- Emphasis on Easy-to-read
- ・Easy-to-read large LCD display
- ・Dual displays for measured data and arithmetic result
- ・Backlit LCD display enables to see under low-right intensity
- Emphasis on Measurement
- ・Multi-input (thermocouple/RTD) allows various applications
- ・Calibration function is a standard provision
- ・Exclusive connector prevents to drop a probe
- Abundant functions
- ・20 data storage
- ・Various computation (max, min, hold, average, alarm, clock)
- ・1000 hours battery life


■MODEL

MC1000-000


■SPECIFICATIONS

Number of input:	1 point
Input types:	Thermocouple type K, T
	Resistance thermometer Pt100
Sensor connectivity:	Exclusve connector, SM connector
Measuring range:	Thermocouple type K −200 to 1370℃
	Thermocouple type T −200 to 400℃
	RTD Pt100 −200 to 500℃
Display resolution:	1℃ −200 to 1370℃
	0.1℃ −99.9 to 199.9℃ (manual setup)
Accuracy ratings:	With a 1℃ resolution
	±(0.1% of rdg +1℃)
	With a 0.1℃ resolution
	<K, T>
	±(0.1% of rdg +0.5℃)
	<Pt100>
	−99.9 to −0.1℃ ±(0.1% of rdg +0.3℃)
	0.0 to 199.9℃ ±(0.1% of rdg +0.2℃)
	at ambient temperature 20 to 30℃
Display:	3-1/2 digits LCD with backlight
Data storage:	Up to 20 data
Computation:	Max/min/average/variables
Function:	Hold
	Alarm
	Stable condition
	Temperature compensation
	Auto power off
	Clock
Battery:	2 × AA
Battery life:	1000 hours while backlight off
	100 hours while backlight on
Working temperture:	0 to 50℃
Working humidity:	10 to 80%RH (no dew condensation)
Dimensions:	76(w) × 164(H) × 36.3(D) mm
Weight:	approx 250g
Casing:	ABS resin
Standard:`	CE
Accessories:	Soft transparent case, batteries, manual

■OPERATION KEYS

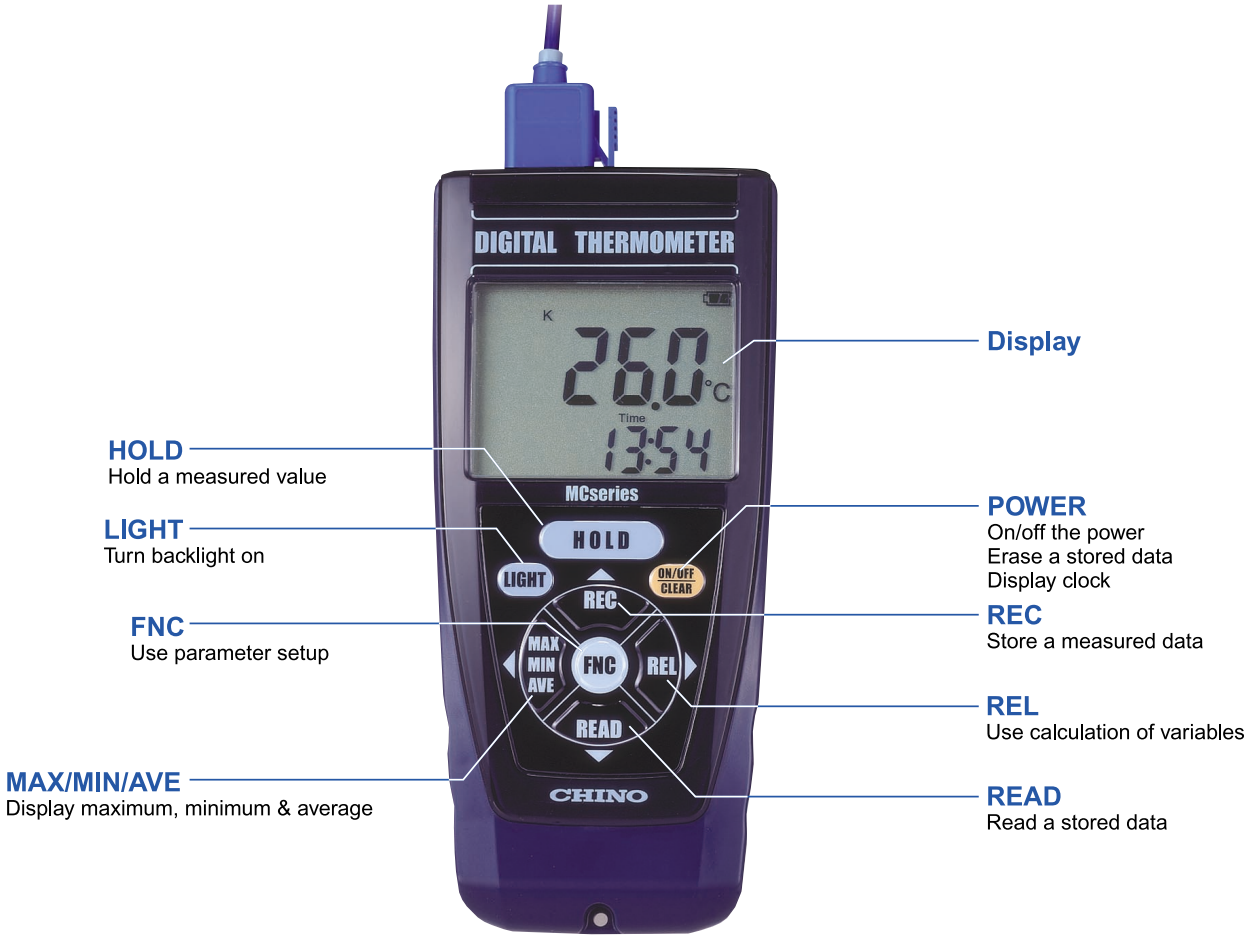


■DISPLAY

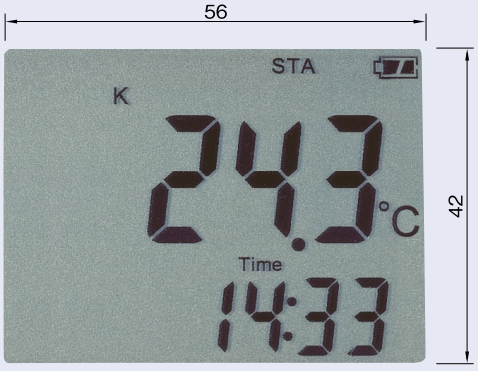

Exact size

■EXTERNAL DIMENSIONS

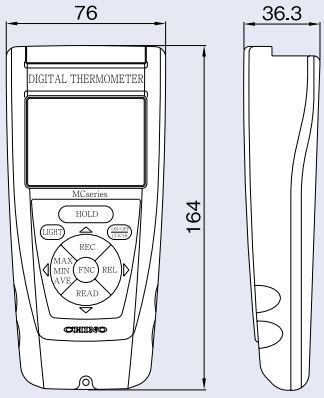


Unit : mm




■TEMPERATURE PROBES (Thermocouple)

Puressure type: YC510-01K

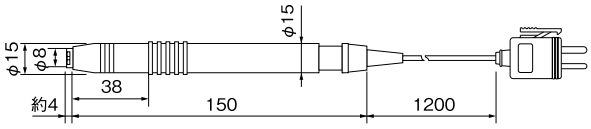


Type: K
Measuring range: max 500℃ (tip material: ceramic)
Response time: approx 1.8 sec (90% response at aluminum block surface 150℃)

L-shaped pressure type: YC510-05K

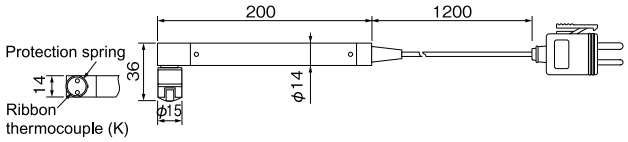


Type: K
Measuring range: max 500℃
Response time: 1 sec (90% response at steel plate surface in boiling steam 100℃)

Pressure low-temperature type: YC510-06K, YC510-06T

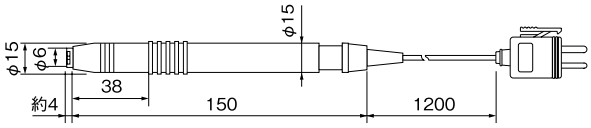


Type: K, T
Measuring range: max 200℃ (tip material: ceramic)
Response time: approx 1.8 sec (90% response at aluminum block surface 150℃)

Needle type: YC520-□1K,YC520-□1T

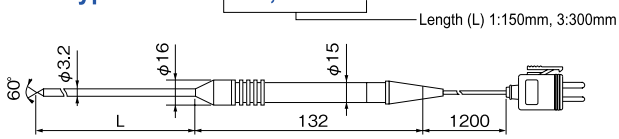


Type: K, T
Measuring range: max 700℃ (max 200℃ with type T)
Tube: ϕ3.2mm/L150 or 300mm/SUS316
Response time: 1 sec or faster (90% response in stirred water)

Pressure high-temperature type: YC510-02K

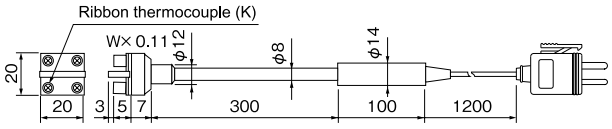


Type: K
Measuring range: max 800℃
Response time: 4 sec (90% response at aluminum block surface 340℃)

General type: YC520-□3K,YC520-□3T

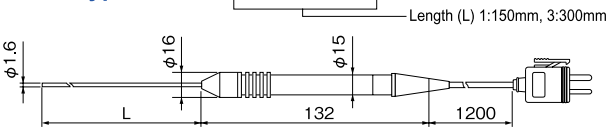


Type: K, T
Measuring range: max 600℃ (max 200℃ with type T)
Tube: ϕ1.6mm/L150 or 300mm/SUS316
Response time: 0.4 sec (90% response in boiling water 100℃)

Rapid response pressure type: YC510-03K

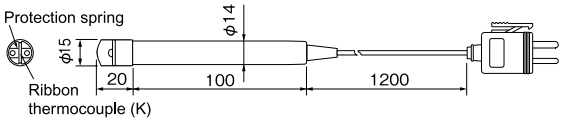

Type: K
Measuring range: max 500℃
Response time: 1 sec (90% response at steel plate surface in boiling steam 100℃)


Roller high-temperature type: YC530-02K

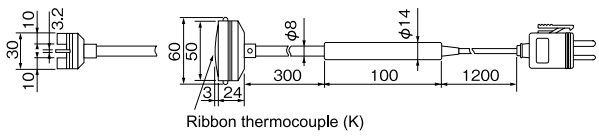

Type: K
Measuring range: max 800℃
Response time: approx 2 sec (90% response at aluminum block surface 150℃)


■TEMPERATURE PROBES (Thermocouple)

Roller pressuring beasring type: YC530-03K

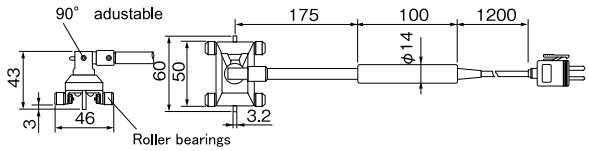


Type: K
Measuring range: max 250℃
Response time: approx 2 sec (90% response at aluminum block surface 150℃)

Prong type with arm: YC501-K(Arm), YC511-02K(Probe)

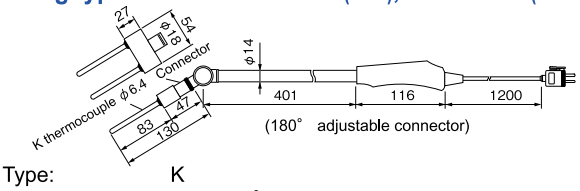


Type: K
Measuring range: max 600℃
Response time: 1 sec or faster (90% response at aluminum block surface 600℃)

Pressure type with arm: YC501-K(Arm), YC511-01K(Probe)



Type: K
Measuring range: max 500℃
Response time: approx 1.8 sec (90% response at aluminum block surface 150℃)


Rapid response pressure type with arm: YC501-K(Arm),YC511-03K(Probe)



Type: K
Measuring range: max 500℃
Response time: approx 1 sec (90% response at steel plate surface in boiling steam 100℃)


■TEMPERATURE PROBES (RTD)

General type: YR520-□13

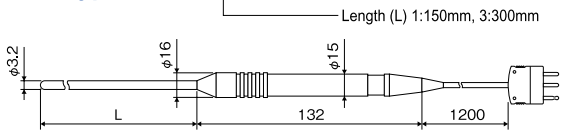

Type: Pt100
Measuring range: -50 to 300℃
Response time: approx 6.8 sec (90% response in stirred water)

Rapid response type: YR520-□23

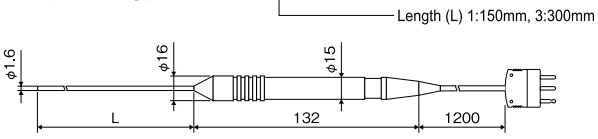


Type: Pt100
Measuring range: -50 to 300℃
Response time: approx 2.3 sec (90% response in stirred water)


■TERMINAL ADAPTER

For thermocouple MODEL YC507-K-□

Type K,T




For RTD MODEL YR507



Unit : mm

■Connect to industrial sensor

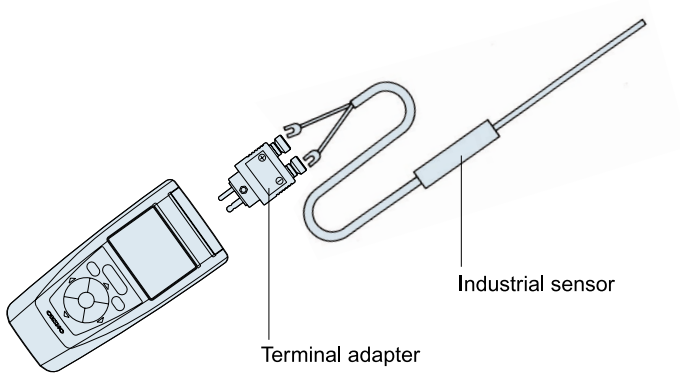

Specifications subject to change without notice. Printed in Japan (I) 2007. 12

CHINO CORPORATION
32-8 KUMANO-CHO,ITABASHI-KU,TOKYO 173-8632
Telephone : +81-3-3956-2171
Facsimile : +81-3-3956-0915
E-mail : inter@chino.co.jp
Website : http://www.chino.co.jp/