


PART No.
TGM-15-642B-01


1 REV.

Rt=12

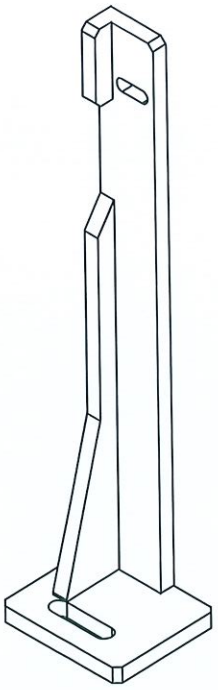

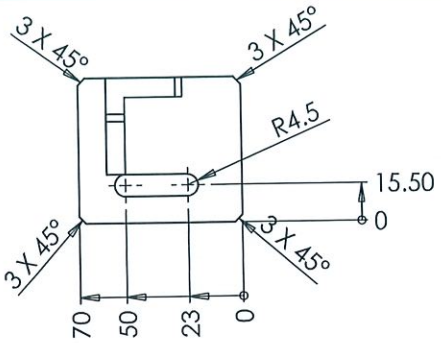

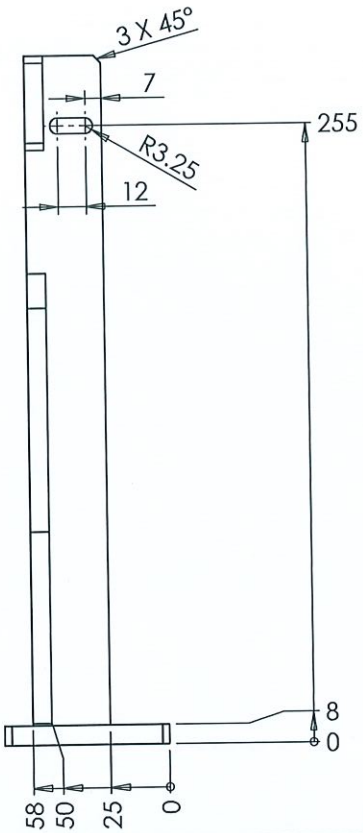

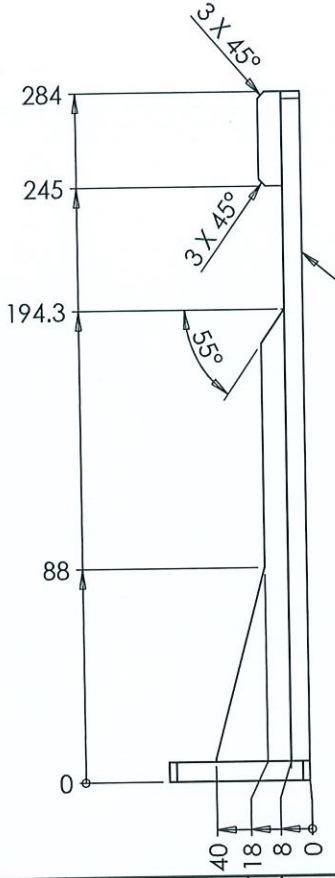

Note:
1. Break all Corner approx by C0.1
2. General Tolerance ±0.1
3. Bake Colour Red Marker Oxyplast Power Coating
4. Accept Welding all way

Minebea Copy
2 0 MAR 2025
Issued G/M and M/A Div.
Uncontrolled

Marking Dwg. No.
and use for: Lock ball screw back side

MinebeaMitsumi Inc.
Copy Issued Uncontrolled
11/12/2567
Engineering Design center
G/M.1 & M/A. Div.

REV.	ECN No.	DATE	NAME	DESCRIPTION
1	----	----	---	ENGINEERING RELEASE

UNLESS SPECIFIED C0.1 OR R0.1	
GENERAL TOLERANCE	
JISB0405 MACHING WORKING	
LESS THAN 0.5	±0.05
0.5 ~ 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.4
400 ~ 1000	±0.8
ANGLE	±1°

0.8S 6.3S 25S 100S ~ UNCUT

M/C. BM-165 Q'ty 1
MATERIAL SS 400
FINISH Bake Colour
HEAT TREATMENT -

List Request No. 265/24
3'RD ANGLE
SCALE : SHEET / UNIT (mm.)

DETAILED	DESIGNED	CHECKED	APPROVED
Phalachai	Aphisek	Preecha	Preecha

DATE 21 Nov' 24

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Plate

PART No. TGM-15-642B-01 1 REV.