


No.	ØA	B	Part
01	11.000	7.50	AS-4349S,E3001E E3004C,F3019
02	10.580	7.50	D3006E,D3007C D3008B,D3012C
03	10.580	6.00	D5A01,D5A02-01
04	11.405	6.00	F5A11-28,F5A12-23

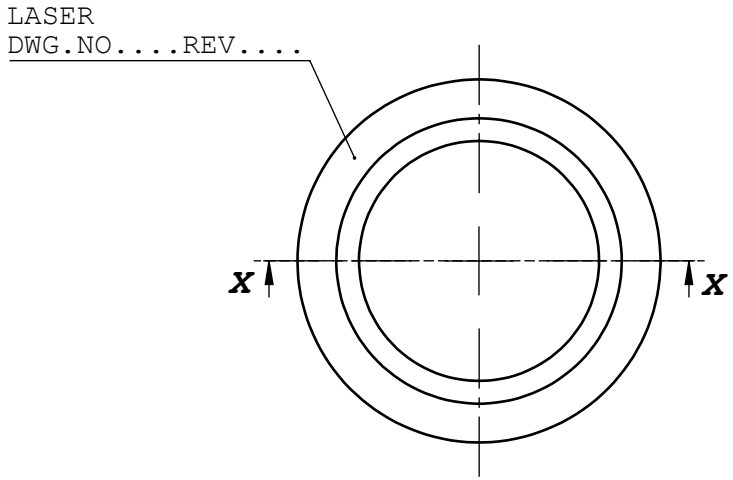


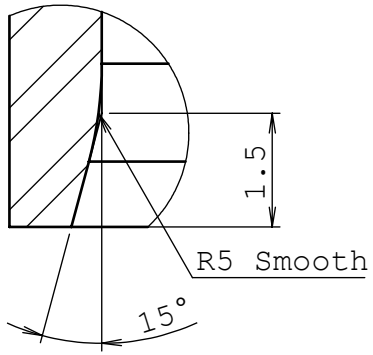

DETAIL Y
SCALE 10 : 1

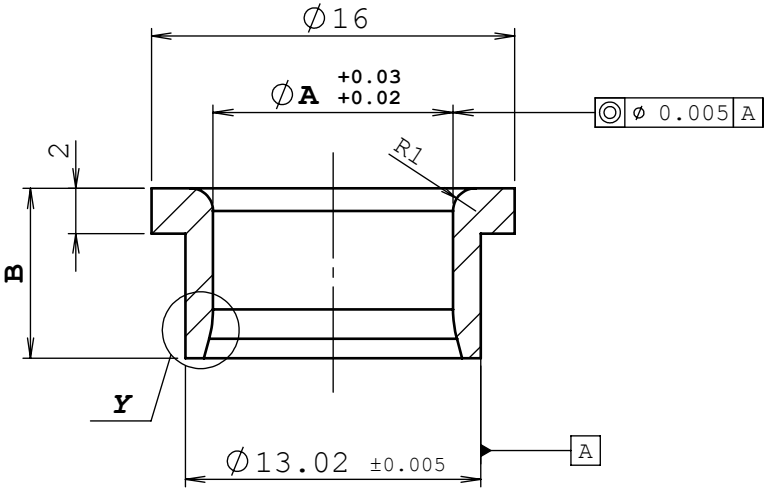

SECTION X-X



Minebea Copy 24/4/2568 Issued G/M and M/A Div. Uncontrolled

Note : No Origano-silicone can be use in manufacturing process and tooling.
if The use of these material is unvoidabel , prior written approval from NMB is requied.

UNLESS SPECIFIED	
C0.2 Max OR R0.2 Max (NO DENT & NO BURR)	
GENERAL TOLERANCE	
JISB0405 MACHINING WORKING	
LESS THAN 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.5
400 ~ 1000	±0.8

0.8 / 6.3 / 25 / 100 / Angle ± 1°

M/C.	Qty.
NCP-B	16

MATERIAL: ULTEM

FINISH: –

HEAT TREATMENT. –

NMB MinebeaMitsumi Inc.
Mechanical Ass'y DIV.

UNIT (mm.) | 3RD ANGLE | SCALE : FREE

TITLE: Base Insert

DETAILED	DESIGNED	CHECKED	APPROVED	DWG.NO	REV.
Phanuwat	Phanuwat	ARTIT	ARTIT	TMA-21-0044E-XX	NR

DATE 24-Apr-25 | UP DATE | SHEET: 1 OF 1

DETAIL | NAME | DATE | ECN.NO. | REV.