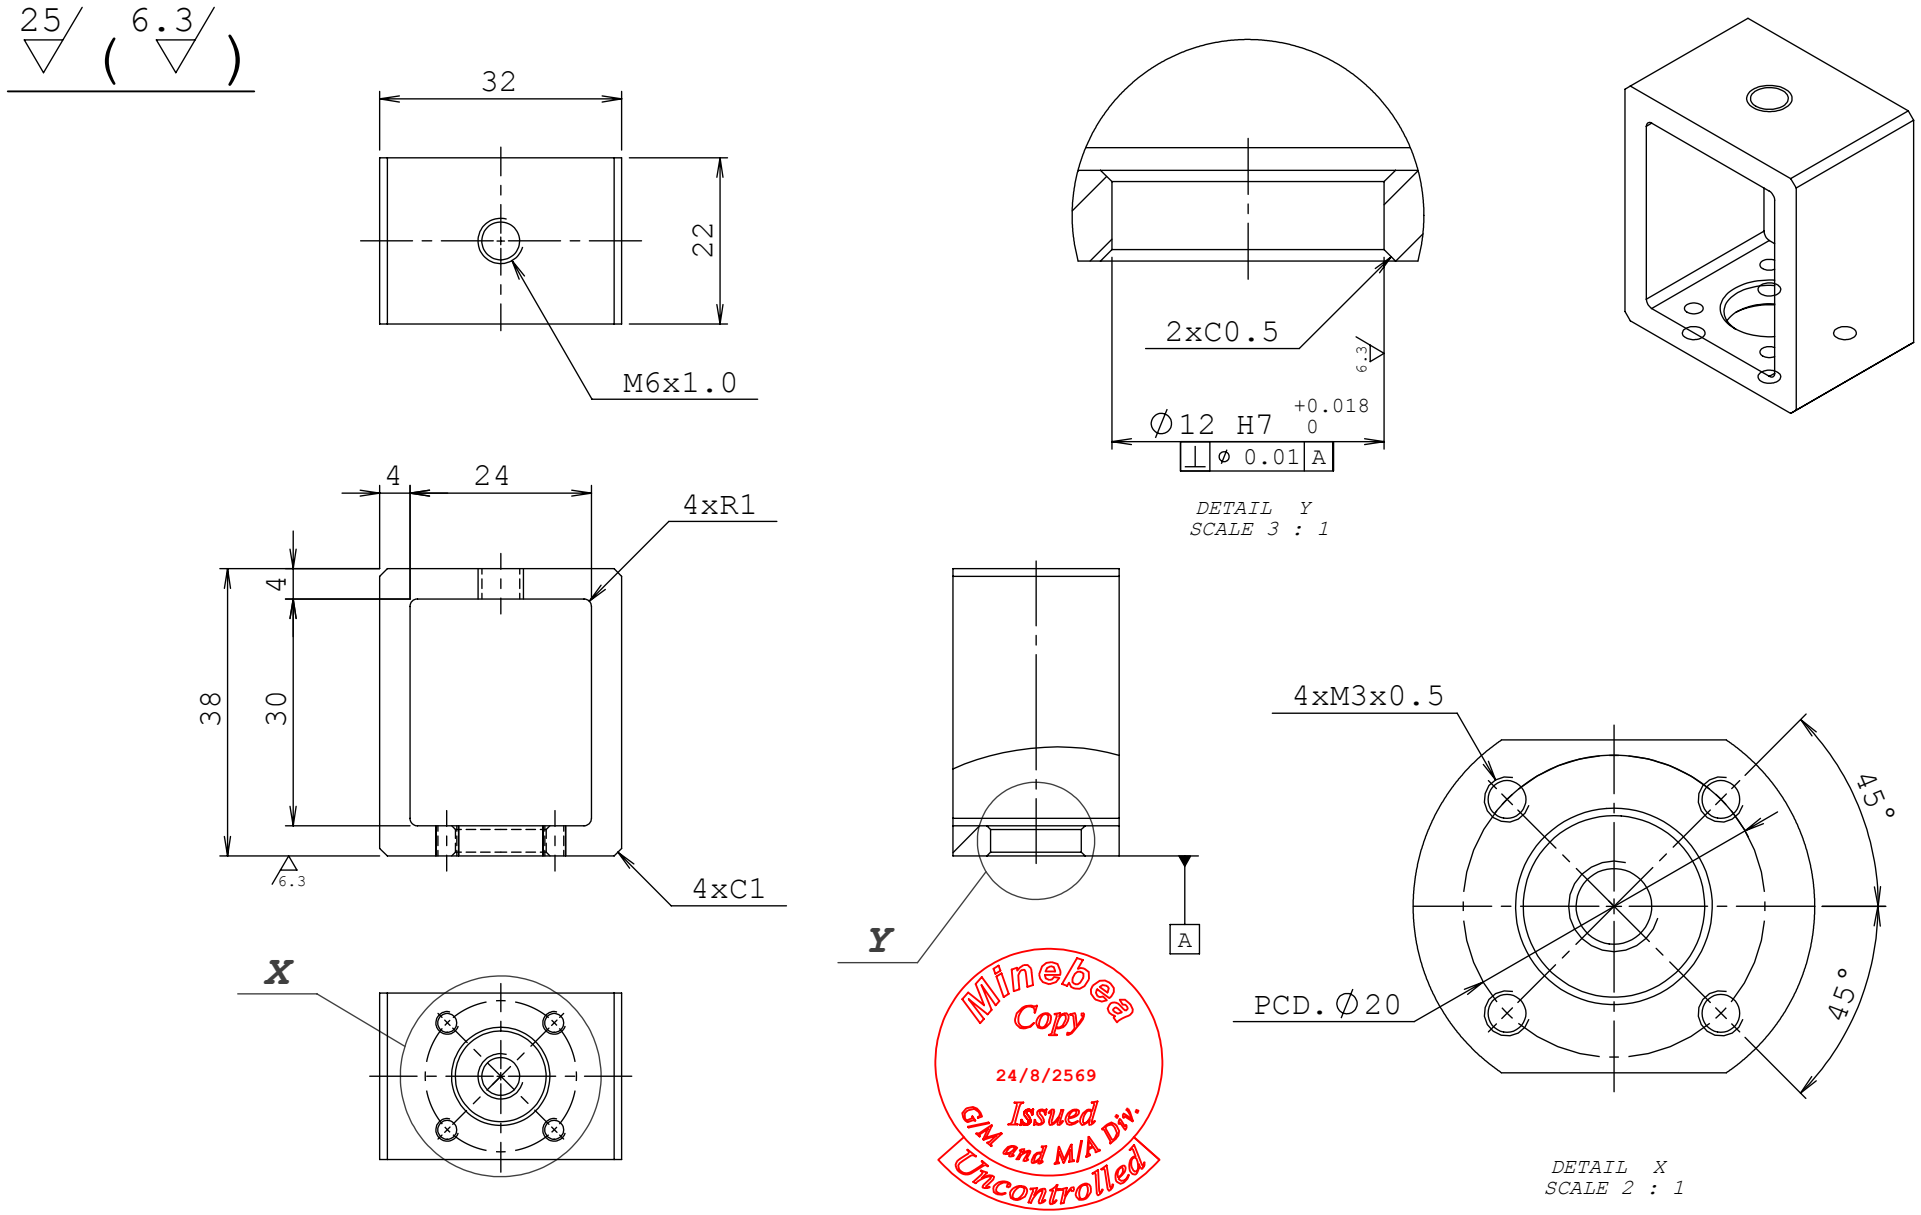



| | | | | | | | |
|---|---|---|---|---|---|---|---|
| UNLESS SPECIFIED C0.2 Max OR R0.2 Max (NO DENT & NO BURR ) | | 0.8 | M/C. NPW-D MNPW-D | Qty. 2 | NMB MinebeaMitsumi Inc. Mechanical Ass'y DIV. | | TITLE Stay Pusher |
| GENERAL TOLERANCE | | 6.3 | MATERIAL SUS304 | | UNIT (mm.) | 3RD ANGLE SCALE : FREE | |
| JISB0405 MACHINING WORKING | | 25 | | | DETAILED Decha | DESIGNED Decha | CHECKED ARTIT / APPROVED ARTIT |
| LESS THAN 6 | ±0.1 | 100 | FINISH | | DWG.NO TMA-22-0016 | | REV. NR |
| 6 ~ 30 | ±0.2 | | | | DATE 12-12-17 | UP DATE | SHEET: 1 OF 1 |
| 30 ~ 120 | ±0.3 | | HEAT TREATMENT. | | | | |
| 120 ~ 400 | ±0.5 | | | | | | |
| 400 ~ 1000 | ±0.8 | Angle ± 1° | | | | | |

NAME
DATE
ECN.NO.
REV.