


Rmax=12S (Rmax=6S , LAP Ra=0.8 , G Rmax=3S)

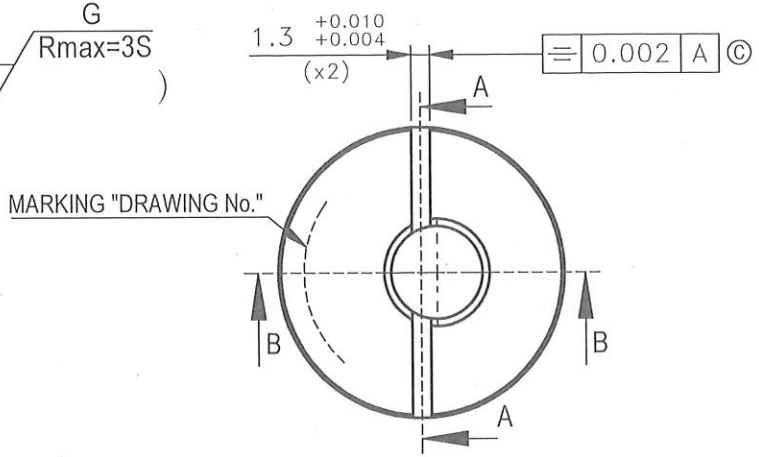

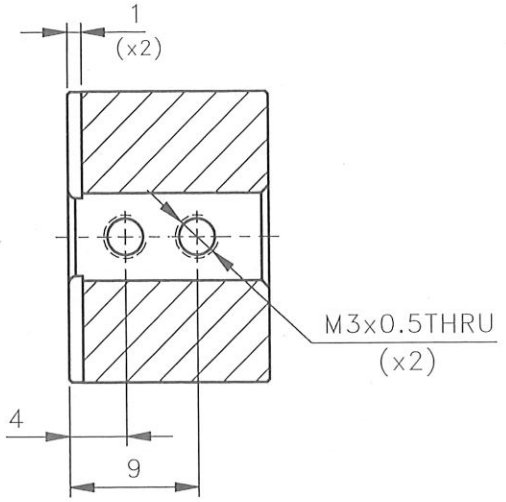

SECTION A-A

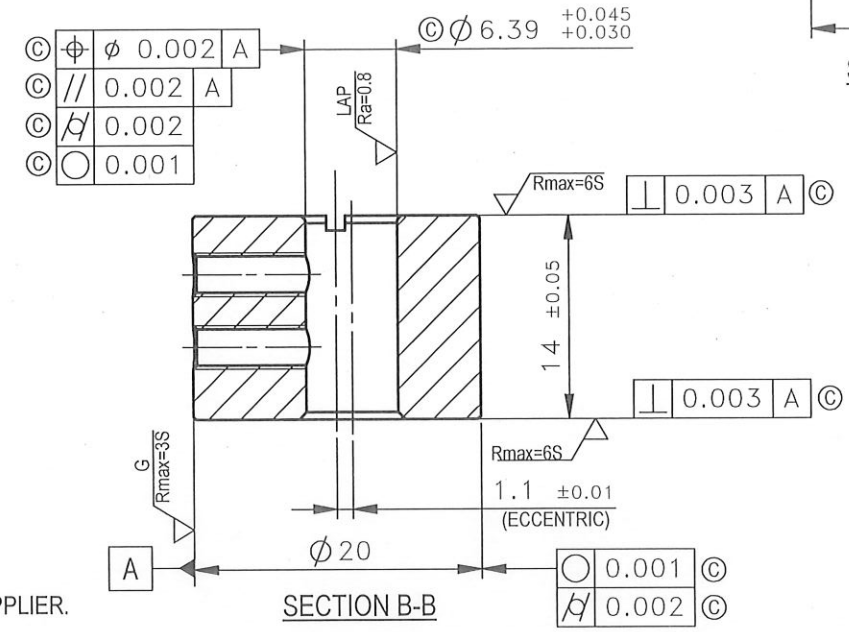

SECTION B-B

NOTE :
1. Ⓒ VALUE WILL BE ATTACHED IN INSPECTION DATA FROM SUPPLIER.
2. NO BURR ,NO SHARP EDGE.

PMA ENGINEERING
Registration date
7 May"25
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

BLANK/INSERT TIP No.	MAKER.	UNLESS SPECIFIED C0.2 or R0.2 FREE BURR & DENT	FOR MACHINE	DESIGN FOR PART No.	3rd. ANGLE	NMB MinebeaMitsumi Inc.
			-	AS-9950-2		Precision Mechanical Component Division

REV.	ECN. NO.	DATE	DESCRIPTION	NAME

GENERAL TOLERANCE		Surface
LESS THAN 0.5	±0.05	0.8S
0.5 - 6	±0.1	6S
OVER 6 - 30	±0.2	25S
OVER 30 - 120	±0.3	100S
OVER 120	±0.5	UNCUT
ANGLE	±1°	

MATERIAL	REFER DRAWING No.	DRAWING NAME
SKD-11	-	ECCENTRIC SLEEVE

HEAT TREATMENT	SCALE: 1:1	SHEET: 1 / 1	UNIT : mm.	DRAWING NO.	REV.
HRC50	PREPARED: WORAWUT	CHECKED: Jirapat	APPROVED: Attapan	TPMA-03-061-01	NR
SURFACE COATING: -	DATE: 9 APR '2025				SIZE A4