


Ra=6.3 (Ra=1.6)

3 PCS / SET



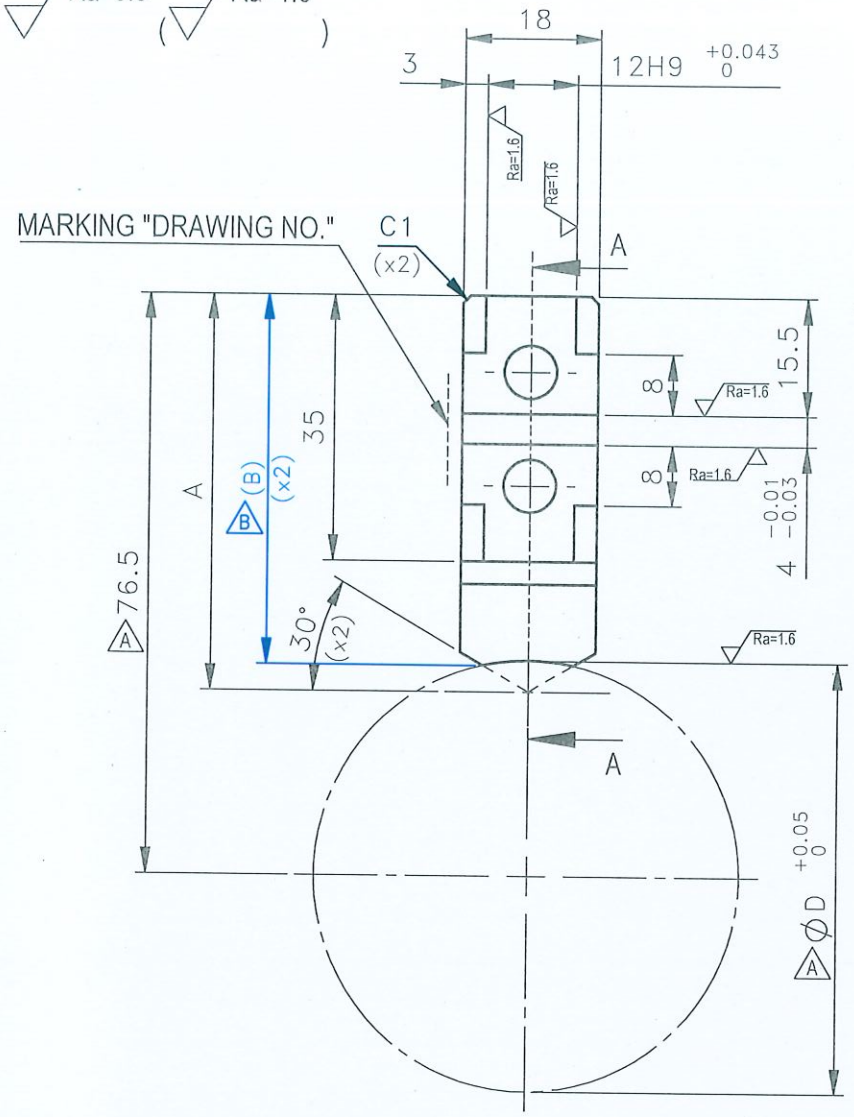

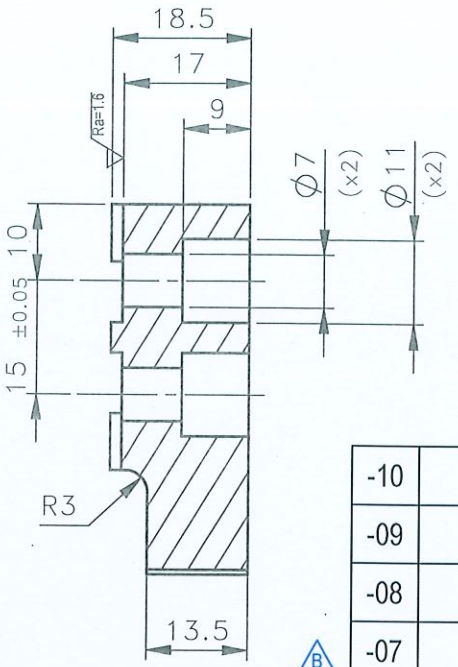

SECTION A-A

	-10				
	-09				
	-08				
B	-07	61.9	58.4	38.1	OT-7221
B	-06	67.9	64.5	26.9	OT-7220
B	-05	64.1	60.6	34	OT-7219
A	-04	67.3	62.1 B	28.08	OT-7182A
A	-03	52.2	48.7	56.8	AS-5C68-1
A	-02	55.2	51.8	50.9	AS-5C67-1
A	-01	57.4	53.9	46.75	AS-5C60-1
	-XX	A	(B) B	ØD A	FOR PART

PMA ENGINEERING
Registration date
19 Aug' 24
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

NOTE : NO BURR , NO SHARP EDGE.

REV.	ECN. NO.	DATE	DESCRIPTION	NAME
NR	-	26-AUG-21	-	WORAWUT
A	S00433	17-JUN-22	CREATE.: SPEC 76.5 ADD.: ROW TABLE	WORAWUT
B	P240803	15-AUG-24	ADD.: ROW TABLE No.-05~-07	WORAWUT

BLANK/INSERT TIP No. | MAKER.

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE		Surface
LESS THAN 0.5	±0.05	0.8S
0.5 - 6	±0.1	6S
OVER 6 - 30	±0.2	25S
OVER 30 - 120	±0.3	100S
OVER 120	±0.5	UNCUT
ANGLE	±1°	

FOR MACHINE: M08SY
MATERIAL: MC602ST
HEAT TREATMENT: -
SURFACE COATING: -

DESIGN FOR PART No.: -
REFER DRAWING No.: -
SCALE: 1:1 | SHEET: 1 / 1 | UNIT : mm.
PREPARED: WORAWUT | CHECKED: Jirapat | APPROVED: Attaya
DATE: 15 AUG '2024

3rd. ANGLE

NMB MinebeaMitsumi Inc.
Precision Mechanical Assembly Division

DRAWING NAME: LOADER JAW(OUT SIDE)
DRAWING NO.: TPMA-18-040-01-XX
REV.: B

SIZE A4