
Rt=1.2 , (G Rt=6 , LAP Rt=0.8)

PMA ENGINEERING
Registration date
5 Feb' 25
NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

REMARK "H"	
PART DIAMETER	"H"
Less than 5 mm	78
More than 5~10 mm	75
More than 10 mm	74

No.	"T"	"H"	FOR PART No.
-01	4.0	75	AS-5877-2
A -02	8	75	AS-5D20-1
-03			
-04			
-05			

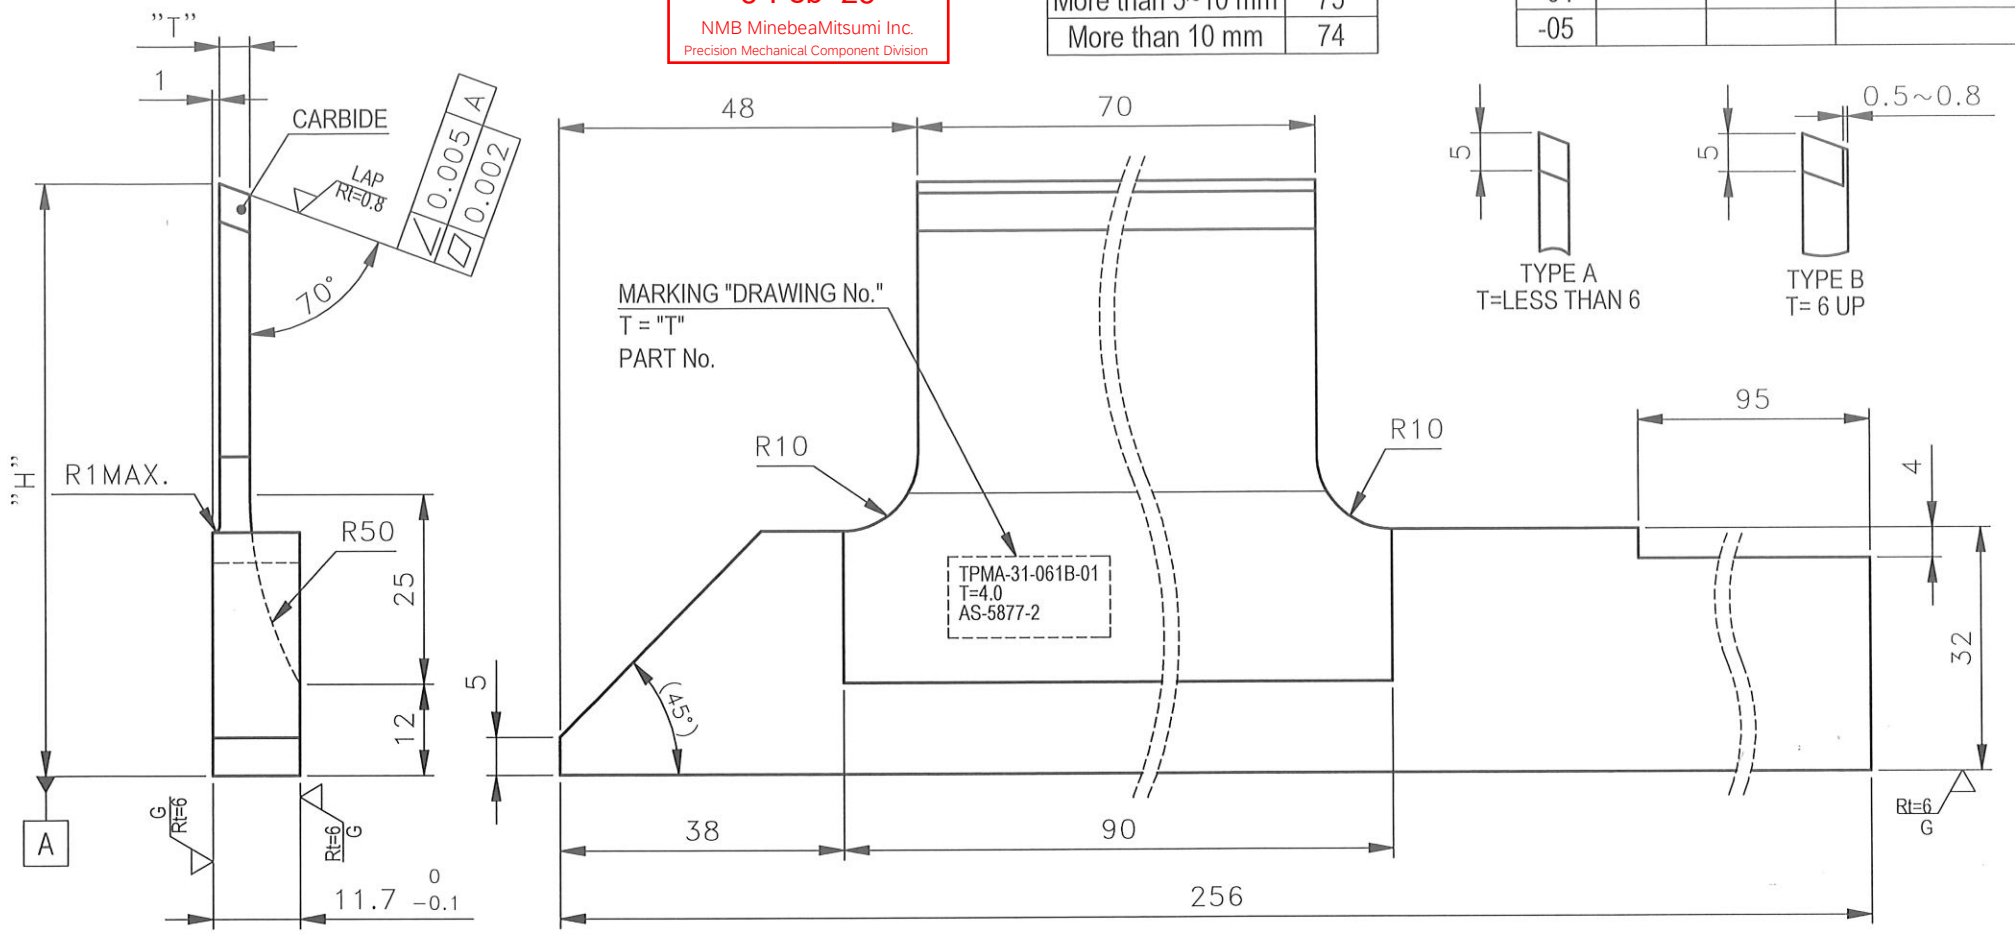

NOTE.: 1. GENERAL TOLERANCE ±0.1
2. BREAK ALL CORNER APPROX BY C0.3~C0.5

REV.	ECN. NO.	DATE	DESCRIPTION	NAME
NR	-	22-SEP-11	-	VEERASAK
A	P250103	23-JAN-25	ADD.: TABLE ROW No.2	WORAWUT

BLANK/INSERT TIP No.: -
MAKER.: -

UNLESS SPECIFIED C0.2 or R0.2
FREE BURR & DENT

GENERAL TOLERANCE	
LESS THAN 0.5	±0.05
0.5 - 6	±0.1
OVER 6 - 30	±0.2
OVER 30 - 120	±0.3
OVER 120	±0.5
ANGLE	±1°

Surface: 0.8S, 6S, 25S, 100S, UNCUT

FOR MACHINE: NISSIN HIGRIND1-D
MATERIAL: SS41 , CARBIDE
HEAT TREATMENT: -
SURFACE COATING: -

DESIGN FOR PART No.: SEE TABLE
REFER DRAWING No.: TPMA-31-353-XX
SCALE: 1:1 | SHEET: 1 / 1 | UNIT : mm.
PREPARED: WORAWUT | CHECKED: Sirapat | APPROVED
DATE: 23 JAN '2025

3rd. ANGLE

NMB MinebeaMitsumi Inc.
Precision Mechanical Component Division

DRAWING NAME: BLADE
DRAWING NO.: TPMA-31-061B-XX
REV.: A

SIZE A4