HOLLAND

PRODUCT	TOP	REBULD	GUARD	LOCK	HANDLE	BUSHING/ PIN KIT	CYLINDER
FW3500 (Stationary)	XA-3501-A-LH (LH)	RK-63501 (LH)	and the same of	RK-63503	RK-1707-M (LH)	RK-04413	
	XA-3501-A-RH (RH)	RK-63500 (RH)	RK-05329		RK-1707-6 (RH)		
FW2535 (Sliding)	XA-3501-A-LH (LH)	RK-63501 (LH)	RK-05329	RK-63503	RK-1707-M (LH)	RK-04413	XA-2524-R
	XA-3501-A-RH (RH)	RK-63500 (RH)			RK-1707-6 (RH)		
FW2000 (Stationary)	XA-2009-A-LH (LH)	RK-62001 (LH)	RK-05328	RK-62004	RK-1117-1-L (LH)	- Selection of the sel	9-9
	XA-2009-A-RH (RH)	RK-62000 (RH)			RK-1117-1 (RH)	RK-04413	
To a to the first transfer to the	XA-2009-A-LH (LH)	RK-62001 (LH)	RK-05328	RK-62004	RK-1117-1-L (LFI)	RK-04413	XA-2524-R
FW2500 (Sliding)	XA-2009-A-RH (RH)	RK-62000 (RH)			RK-1117-1 (RH)		
FW2555 (Sliding)	XA-71-DAS	RK-65014		RK-65024	-	3.0	
FW2570 (Heavy Duty Sliding)	XA-71-DAS	RK-65014		RK-65024		Y-	
	XA-351-A-L-P (LH)	RK-351-A-L (LH)	N/A	RK-351-07296	XA-07151-1	The last to the last of the	
FW35 (Stationary)	XA-351-A-P (RH)	RK-351-A (RH)				RK-06973-1	
ni na sanjurbah	XA-351-A-L-P (LH)	RK-351-A-L (LH)	N/A	ranging Granes	Action V	RK-06973-1	XA-2524-R
FW35 (Sliding)	XA-351-A-P (RH)	RK-351-A (RH)		RK-351-07296	XA-07151-1		
FW35-89xx (No-tilt Stationary)	XA-351-A-06-L-P	RK-351-A-L	N/A		4	1.0	-
FW35-7401 (No-tilt Sliding)	XA-351-A-06-L-P	RK-351-A-L	N/A	-	XA-07151-1	RK-06973-1	XA-2524-R
FW35-8401 (No-tilt Sliding)	XA-351-A-06-L-P	RK-351-A-L	N/A	•	XA-07151-1	RK-06973-1	-
District of the second	XA-201-A-L-P (LH)	RK-201-A3-L (LH)	N/A	N/A	N/A	RK-06973-1	3 -
FW8 (Stationary)	XA-201-A-P (RH)	RK-201-A3 (RH)					
en dien seers en da	XA-201-A-L-P (LH)	RK-201-A3-L (LH)	N/A	N/A	N/A	RK-06973-1	XA-2524-R
FW8 (Sliding)	XA-201-A-P (RH)	RK-201-A3 (RH)					
FW17 (Stationary)	XA-17-A-L-P	RK-17-A-L	N/A	RK-17-A-L-P	RK-171-11079		-
FW17 (Sliding)	XA-17-A-L-P	RK-17-A-L	N/A	RK-17-A-L-P	RK-171-11079	-	XA-2524-R
FW6700-168 (Air Elevating)	XA-3501-UB	RK-63502	N/A	RK-63504			
FW67-168 (Air Elevating)	XA-351-UB-P	RK-351-L/B	N/A				
FW35-03344 (Yard Spotter)	XA-351-035055	RK-351-03505	N/A	N/A	-	-	XA-2524-R-13-
FW35-03344-1 (Yard Spotter)	XA-351-035055	RK-351-03505	N/A	N/A			XA-25 24-R-13-
FW2870-03184 (Yard Spotter)	XA-2801-03185-1		N/A	RK-031.85-1	-	-	XA-2524-R-4-1
FW1560 (Side Oscillating)	XA-1501-CA15	RK-65005	N/A				
FW0100-D (Heavy Duty (2" KP*))	XA-101-DAS	RK-65012	N/A	RK-65024			N/A
FW0100-0 (Heavy Duty (3.5" KP*)) XA-101-OAS	RK-65013	N/A	RK-65024-1			N/A
FW0070 (Heavy Duty (2" KP*))	XA-71-DAS	RK-65014	N/A	RK-65024			N/A
FW0070 (Heavy Duty (3.5" KP*))	XA-71-OAS	RK-65015	N/A	RK-65024-1			N/A
FW2800-X (Hydraulic Lift)	XA-2801-AX-15	RK-65021	N/A	N/A			
FW2900-X (Hydraulic Lift)	XA-2801-AX-15	RK-65021	N/A	N/A			
FW1580		XA-1581-A-1	RK-65006		1-		
FW2870-03184		XA-2801-03185-15	RK-03185-1				XA-2524-R-4-1


HOLLAND

Part # Reference

PRODUCT	HEAD	REBUILD KIT	NOTES
FW35	XA 351 A L P	RK 351 A L (for left hand pull)	
FW3500	XA 3501 AL H	RK63501	
FW31 (NO LUBE)		RK 311 A L	
FW8	XA 201 A L P	RK201A3L	CAN USE XA17ALP
FW17	XA17ALP	RK17AL	
FWAL		RK AL A L	lube plates RK331 1
FWS1		RK FWS A L	jaw kit RK 4109939
FWS2		RK FWS A L	jaw kit RK 4109939
FW070	XA 71 D		W/ 2" KING PIN
FW2570	XA 71 03706		W/ 2" KING PIN
FW070	XA 71 O		W/3.5" KING PIN
FW2570	XA 03711		W/3.5" KING PIN
SPOTTER	XA351 03505S	RK351 03505	
FW1560C	XA 1501 CA1	RK65005	

FONTAINE

The Most Common repair parts by model type

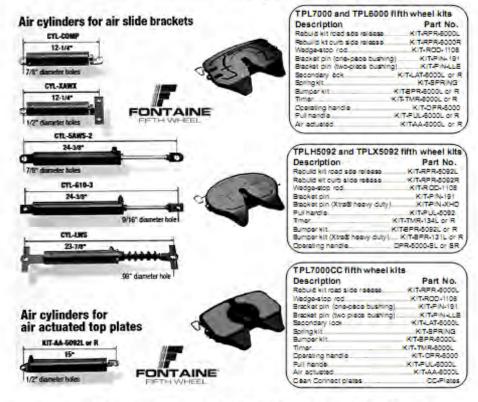

How Fontaine puts a part number together to order a 5th wheel:

1. Top plate		2. Mounting lar	3. Slide rail	
SL Belease SL = Side Left SR = Side Right AA = Air Actuated SL = Blocked Left	7 Top plate model 7 = 7000 No-Stack* C = 70000 No-Stack* (left release only) H = 5092 No-Stack* X = X5022 No-Stack* 3 = 3000 NS-MRS, AFB, SMB brackets only) Note: 6000 series top plate discontinued to the aftermarket	ATB Meaning bracket model ATB = Ar side bracket MTS = Manual side bracket PMA = Plate mount adjustable PSA = Short plate mount BSM = Bracket stabonary mount RAX = Xmm heavy only air wadys side ASB = Ar side bracket (2000) APB = Adjustable plate mount (2000) ASB = Sationary hume mount (2000) ASB = Sationary hume mount (2000)	G750 Mounting belight Actual height from truck frame to top of fifth wheel. Exemples: 7125 = 74.6° 7250 = 74.4° 8375 = 8-36° 9750 = 9-34°	12 Side travel For siding 8th wheels only Exemple: 12 = 12 side Side 24 = 24 side 36 = 55 side 48 = 45 side

Part # Reference

MODEL	HEAD	REBUILD KIT
SL6	SLTPL7000	KITRPR6000L
SL7	SAME	KITRPR6000L
SLC	SLTPL7000CC	KITRPR6000L
SL3	SLTPL3000	KITRPR3000L
SLH	TPLH5092SL	KITRPR5092L
CD700	SLCD7FM5750	KITRPRS500
CD600	SLCD7FM5750	KITRPRS500

FONTAINE

1. Select your top plate*



Standard-duty approved for on-highway applications

DO NOT use 7000, 7000CC or 3000 series in off-highway applications (example: logging)

Fifth wheel part number

Approved applications

SLTPL7000 Standard-duty on-highway (road side release) SRTPL7000 Standard-duty on-highway (curb side release)

SLTPL7000CC Standard-duty on-highway "Clean Connect" (road side release)

AATPL7000 Standard-duty on-highway (road side air actuated release)

AATPL7000CC Standard-duty on-highway "Clean Connect" (road side air actuated release)

SLTPL3000** Standard-duty on-highway (road side release)
*The 3000 series fifth wheel will only fit on 3ASB, 3APB and 3SMB brackets.



You can upgrade your Fontaine 6000 or 7000 series fifth wheel from manual to "Air Actuated" in-cab release. Simply order a KIT-AA-6000L (road side release) or MT-AA-6000R (curb side release). You will also need KIT-AIR-DASH for the parts required to complete the in-dash installation.





Moderate-duty approved for up to 10% off-highway (example: logging)

Fifth wheel part number

Approved applications

SLTPLH5092 Moderate to severe-duty (road side release) SRTPLH5092 Moderate to severe-duty (curb side release)

AATPLH5092 Moderate to severe-duty (road side air actuated release)



Severe-duty approved for off highway use (example: oil patch)

Fifth wheel part number Ap SLTPLX5092 Sec

Approved applications Severe-duty (road side release)

SRTPLX5092 Severe-duty (curb side release)

HOLLAND-SIMPLEX

HOLLAND-SIMPLEX FIFTH WHEEL TOP PLATES

SIMPLEX SERIES® TOP PLATES



Part No. 10402720 Holland Simplex Top Plate Part No. 4102720 Holland Simplex II SE Top Plate

Specifications:

Vertical Load Capacity 55,000 lbs.

Trailing Load 150,000 lbs.

Top Plate Weight 220 lbs.

Specifications:

Vertical load capacity 70,000 lbs.

Trailing load 200,000 lbs.

Top plate weight 260 lbs.


Models using the above heads:

- > ASF
- ➤ CONMET
- SIMPLEX
- ➢ SIMPLEX II
- CASTLOC
- ➤ CASTLOC II

NOTE: We only stock the lighter duty part #10402720; it is 55,000 lbs and will work for most applications. Part #4102720 is for heavy duty applications (70,000 lb), primarily SIMPLEX SE and SIMPLEX II SE. If the model is equipped with TOUCHLOC, the head will be #10602720 Part #10402720 can be substituted, but the "TOUCHLOC" control mechanism will not be on it. It can be substituted for 70,000 lb applications, especially if the tractor is being used on-highway without requiring a 70,000 head.

HOLLAND-SIMPLEX

HOLLAND-SIMPLEX & SIMPLEX II FIFTH WHEEL PARTS

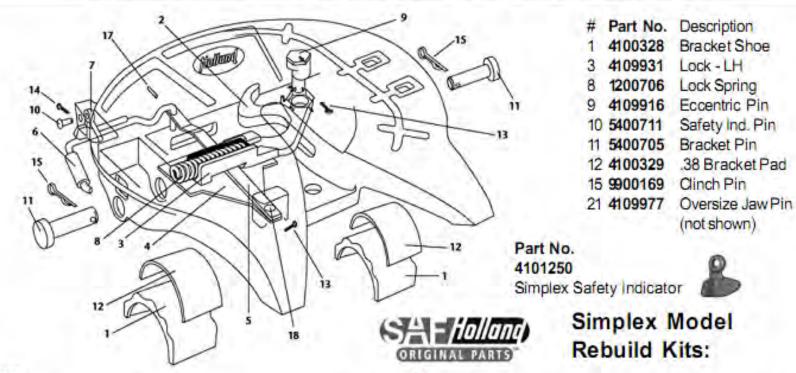

Kit			Kit		
Part No.	Description:	Includes #'s	Part No.	Description:	Includes #'s
4000501	Jaw Kit - Standard Eccentric Pin	2,9,13	4000528	Bracket Pad Kit (.38" pads)	13
4000502	Jaw Kit - Oversize Eccentric Pin	2,9,13	4000587	Bracket Pad Kit (.42" pads)	13
4000641	Bracket Connection Kit (.33" pads)	1,11-12,15	4000570	Lock Kit	3-5,8,13,18
4000504	Bracket Connection Kit (.38" pads)	1,11-12,15	4000531	Operating Rod Kit for TouchLoc	6-7,10,14,17
4000588	Bracket Connection Kit (.42" pads)	1,11-12,15	4000507	Operating Rod Kit	6-7.10.14.17
4000640	Bracket Connection Kit (.33" pads)	12		C C. I. C	