RFSoC carrier: 12 RF–ADC inputs, STAP beamformer in PL, RF–DAC regenerates clean L–band RF for the ZED–X20P.

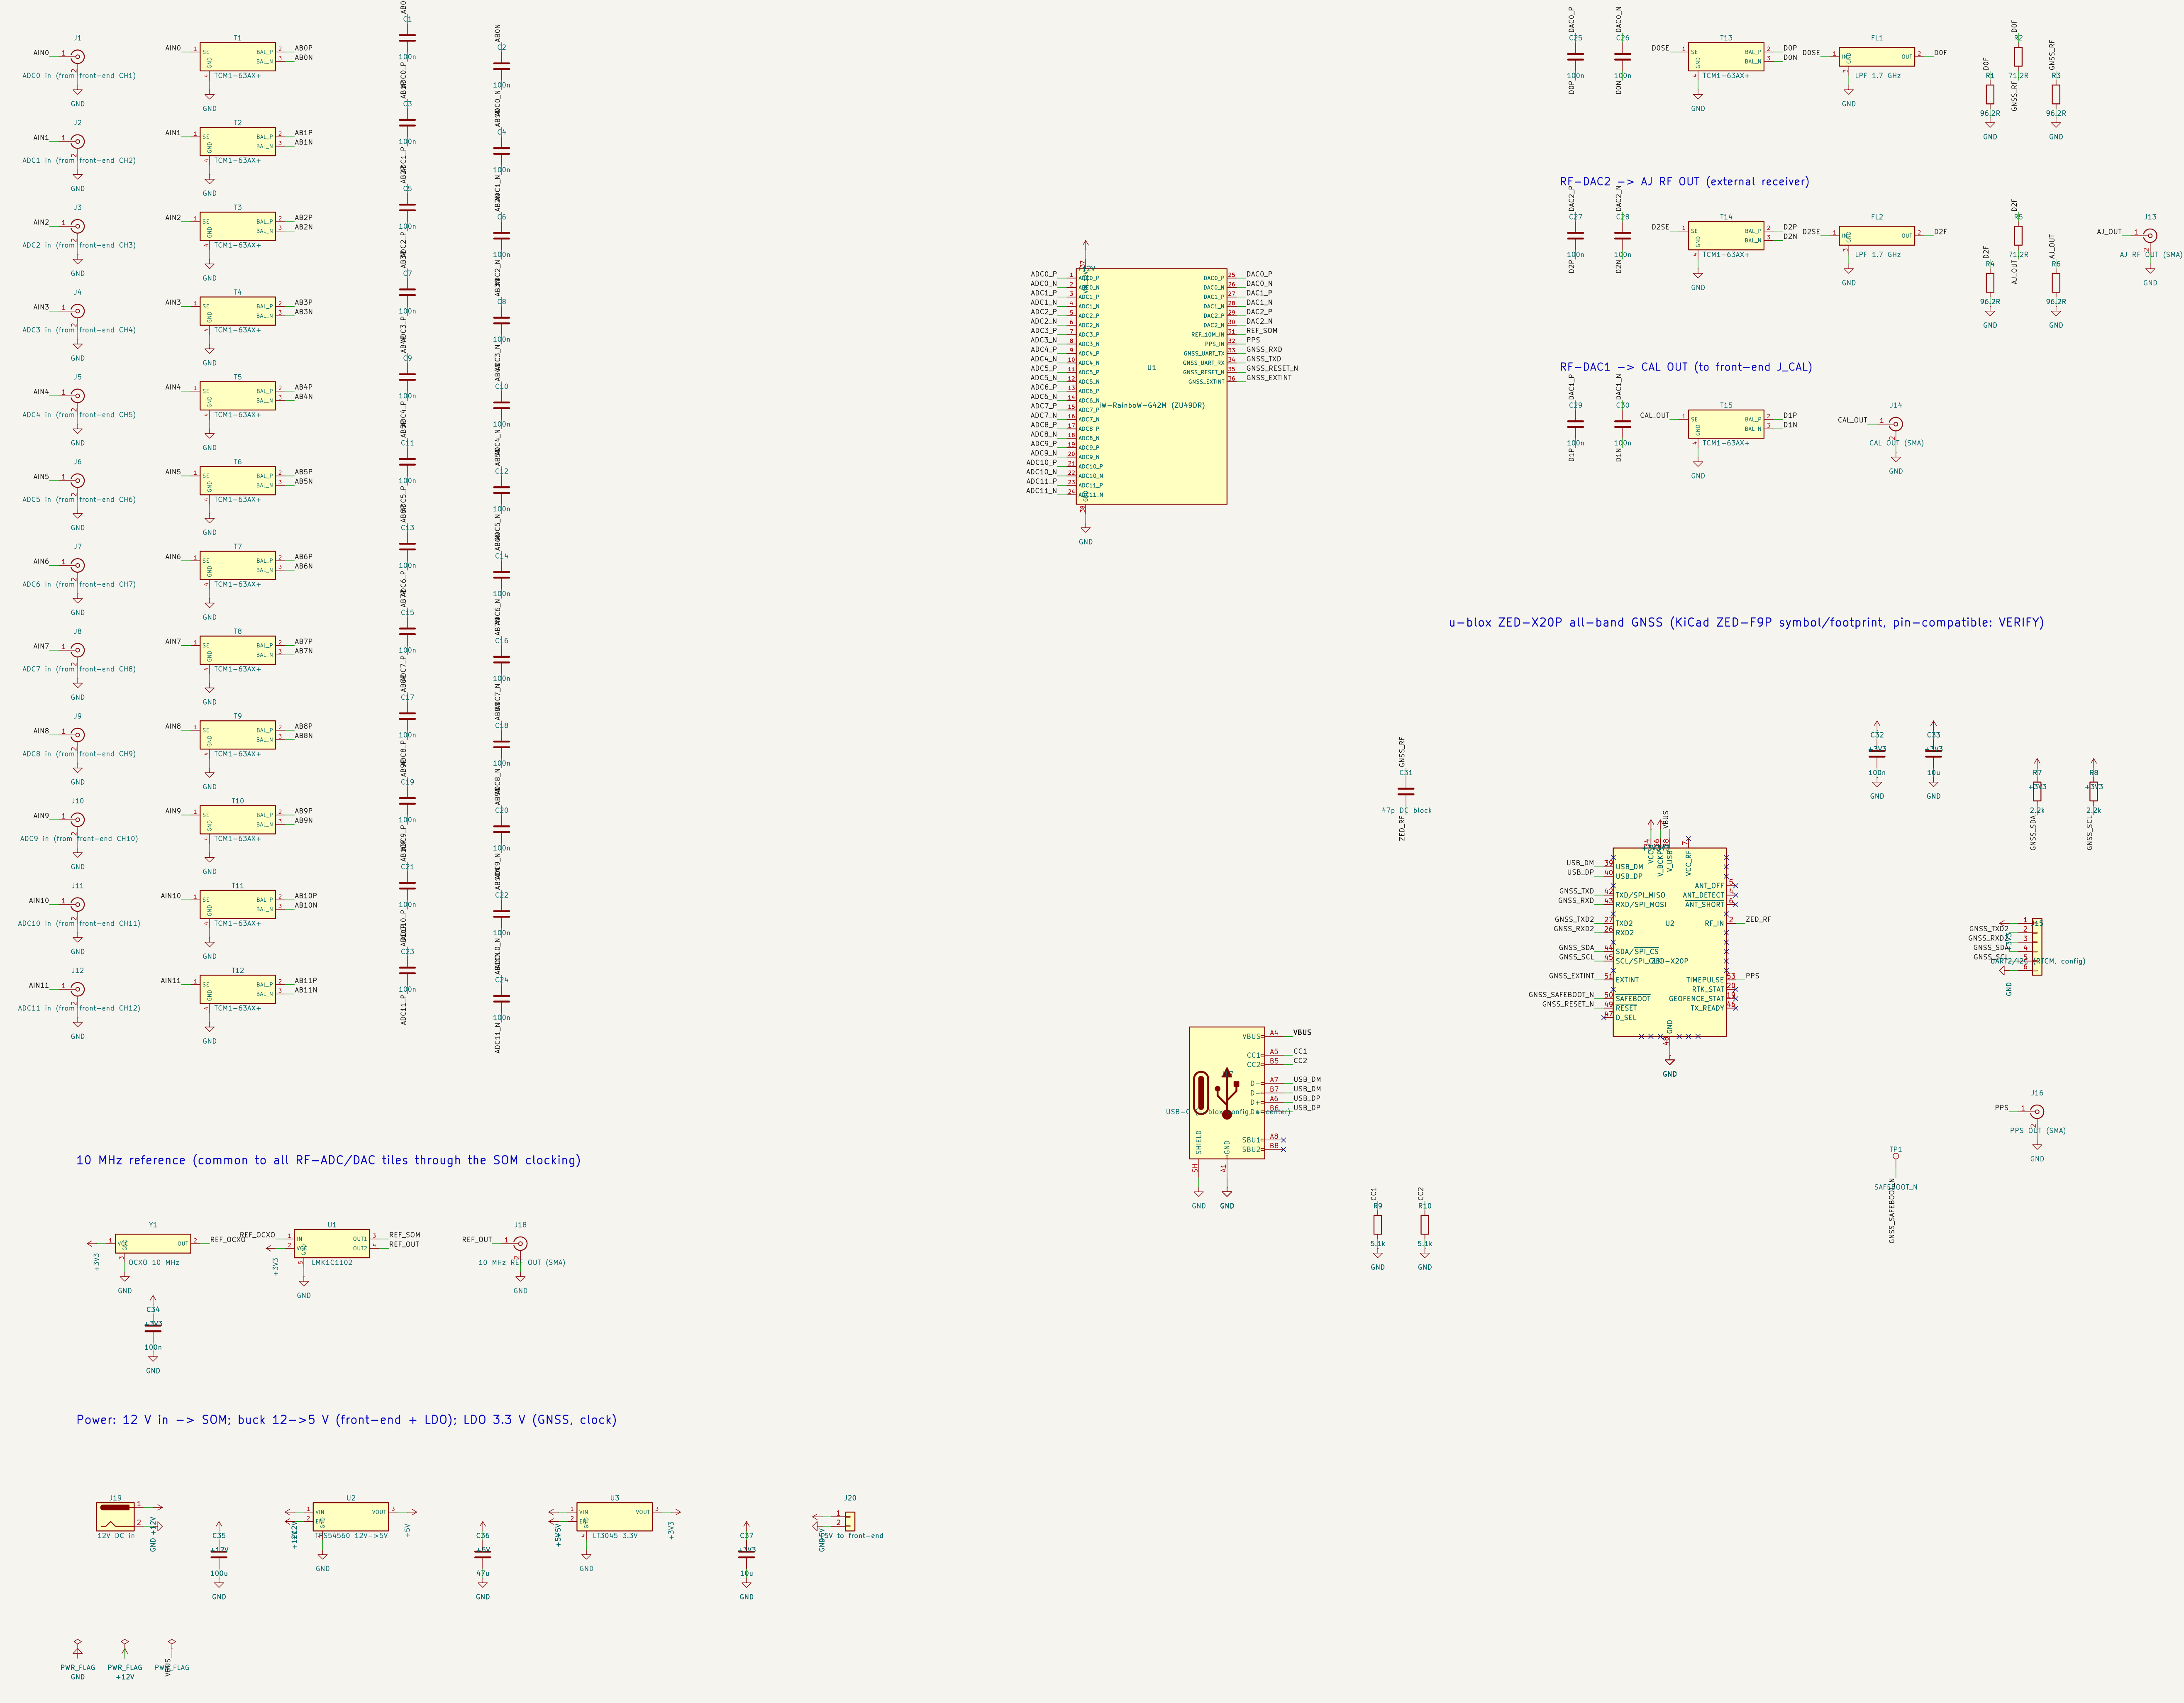

RF–DAC0 –> clean GNSS RF –> ZED–X20P

RF–DAC2 –> AJ RF OUT (external receiver)

RF–DAC1 –> CAL OUT (to front–end J_CAL)

u–blox ZED–X20P all–band GNSS (KiCad ZED–F9P symbol/footprint, pin–compatible: VERIFY)

10 MHz reference (common to all RF–ADC/DAC tiles through the SOM clocking)

Power: 12 V in –> SOM; buck 12–>5 V (front–end + LDO); LDO 3.3 V (GNSS, clock)

Part numbers marked VERIFY are candidates: check datasheet, pinout, availability
Generated by hardware/*/gen_*.py – edit the generator, not this file
**GNSS anti–jam CRPA**

Sheet: /
File: dsp_gnss.kicad_sch

**Title: CRPA RFSoC carrier + u–blox ZED–X20P**

Size: A0
Date:
**Rev: A**
KiCad E.D.A. 10.0.3
Id: 1/1