


# ARP packet flow

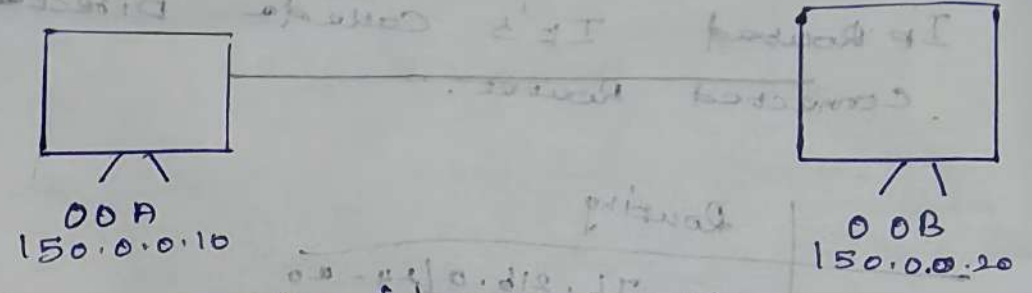

write a packet flow of 150.0.0.10 to 150.0.0.20

## ARP Req

Sender IP - 150.0.0.10  
 Sender MAC - 00A  
 Target IP - 150.0.0.20  
 Target MAC - FF.FF.FF?  
 (00.00.00)

SMAC -> 00A      Broadcast  
 DMAC -> FF.FF.FF

## ARP REPLY

Sender IP -> 150.0.0.20  
 Sender MAC -> 00B  
 Target IP - 150.0.0.10  
 Target MAC -> 00A

Unicast  
 SMAC -> 00B  
 DMAC -> 00A

|      |                |          |
|------|----------------|----------|
| Echo | SIP 150.0.0.10 | SMAC 00A |
|      | DIP 150.0.0.20 | SMAC 00B |

Echo Request (ICMP)

Echo Reply (ICMP)

|      |                |          |
|------|----------------|----------|
| Echo | SIP 150.0.0.20 | SMAC 00B |
|      | DIP 150.0.0.10 | DMAC 00A |