

# An intermediate-scale model for thermal hydrology in low-relief permafrost-affected landscapes

Ahmad Jan<sup>a</sup>, Ethan T. Coon<sup>b</sup>, Scott L. Painter<sup>a</sup>, Rao Garimella<sup>b</sup>, J. David Moulton<sup>b</sup>

<sup>a</sup>*Climate Change Science Institute and Environmental Sciences Division, Oak Ridge National Laboratory*

<sup>b</sup>*Los Alamos National Laboratory*

---

## Abstract

Integrated surface/subsurface models for simulating the thermal hydrology of permafrost-affected regions in a warming climate have recently become available, but computational demands of those new process-rich simulation tools have thus far limited their applications to one-dimensional or small two-dimensional simulations. We present a mixed-dimensional model structure for efficiently simulating surface/subsurface thermal hydrology in low-relief permafrost regions at watershed scales. The approach solves an operator-split system, sequentially coupling a two-dimensional surface thermal hydrology system with a family of one-dimensional vertical columns, where each column represents a fully coupled surface/subsurface thermal hydrology system without lateral flows. The overland thermal hydrology system with no sources acts to redistribute mass and energy horizontally by updating the column systems before they advance in time. We show that the approach is highly scalable, supports subcycling of different processes, and compares well with the corresponding fully three-dimensional representation at significantly less computational cost. These advances enable state-of-the-art representations of freezing soil physics to be coupled with thermal overland flow and surface energy balance at scales of 100s of meters. Although developed and demonstrated for permafrost thermal hydrology, the mixed-dimensional model structure is applicable to integrated surface/subsurface thermal hydrology in general.

**Keywords:** Mixed-dimensional model, Permafrost thermal hydrology,

## 1. Introduction

Approximately 23% of the land surface in the Northern Hemisphere is underlain by continuous permafrost (91-100% frozen area), and another 17% is occupied by discontinuous permafrost (50-90% frozen area) [1, 2]. A massive  
5 amount of organic carbon is stored in those regions [3, 4], which are warming at a rate considerably faster than the rest of the planet [5, 6, 7]. As the soils in that region warm, they have the potential to transform from a net sink to a net source of carbon to the atmosphere, which could increase the concentration of carbon in the atmosphere and in turn lead to further increase in the temperature (e.g.  
10 [8]). Further, thawing and the resulting degradation of permafrost can cause significant changes in the surface and subsurface thermal hydrology and eventually can substantially alter the Arctic tundra ecosystems [9, 10, 11, 12, 13].

Those potential impacts and feedbacks in the terrestrial Arctic have motivated the development of increasingly sophisticated tools for simulating permafrost dynamics in a warming climate. Such simulations can help to better understand the consequences of soil warming and responses of tundra ecosystems to warming trends, and further expose the effects of permafrost degradation on surface and subsurface thermal hydrology. However, simulating permafrost dynamics in a complex and coupled surface/subsurface thermal hydrological environment is a challenging task, especially at larger spatiotemporal scales [14].  
20 A comprehensive review of the modeling efforts of the surface and subsurface can be found in [15]. Early research efforts focused on one-dimensional simulations for fundamental understanding of infiltration in cold climates; see, for example, [16, 17, 18]. Similar one-dimensional approximations have been adopted  
25 as coarse-scale models in global land surface models [19, 20, 21, 13]. Two-dimensional simulations with simplified physics (i.e. saturated conditions, subsurface only) have been used for understanding evolution of field-scale groundwater systems [22, 23], but do not represent key unsaturated zone processes

that are needed to understand active layer dynamics and decomposition of soil  
 30 organic matter. It is worth pointing out that mathematical models with limited complexity, reduced dimensionality, and relatively coarse spatial resolutions provide some insight into permafrost dynamics but fail to represent important processes such as cryosuction, lateral surface and subsurface flows, and advective heat transfers. Simulations with more mechanistic representations of surface and  
 35 vadose zone process in three-dimensions are essential to accurately capture the potential impacts of permafrost thawing on the surface and subsurface thermal hydrology and the resulting effects on the carbon cycle.

Two- and three-dimensional models with explicit physics-based representations of ice/liquid/gas partitioning in the vadose zone [24] have only recently  
 40 started to appear. Painter [2011] developed the three-phase, two-component model MarsFlo which has been used in Mars [26] and Earth permafrost studies [27]. Karra et al. [2014] simplified that subsurface freezing-soil thermal hydrology representation by ignoring gas advection and implemented that Richards-like approximation in the highly parallel PFLOTRAN [29] code. Those com-  
 45 puter codes are all subsurface-only models; that is, they do not represent surface flows and surface energy balance. Painter et al. 2016 recently introduced the Arctic Terrestrial Simulator, which uses a sophisticated multiphysics management framework [31] to couple the three-dimensional subsurface representation of [28] with a two-dimensional non-isothermal surface flow model, surface energy  
 50 balance with and without snow, and a simple snow distribution model.

Despite the significant progress in developing integrated surface/subsurface permafrost thermal hydrology models, significant challenges remain in moving to climate-relevant spatiotemporal scales. One of the challenges is that the integrated system is numerically stiff because of the highly dynamic surface sys-  
 55 tem [30] and the ice-liquid phase transition [32], which often results in relatively small time steps to achieve convergence. Small time steps are not problematic in one-dimensional simulations because a well-designed simulation tool will recover the time step quickly after a convergence failure. However, a small time step becomes problematic in large three-dimensional runs because it becomes

60 increasingly likely that, at any given time, at least one computational cell will be  
 experiencing a phase change and thus a small time step. The other major chal-  
 lenge is tracking thaw-induced subsidence. Traditional hydrological simulators  
 are mainly designed to conduct three-dimensional simulations, however, defor-  
 mations in a three-dimensional simulation are not easy to track due to mesh  
 65 tangling and can be computationally expensive; further, poor mesh quality may  
 raise questions about the accuracy of the results.

To address the aforementioned challenges, we present a mixed-dimensional  
 modeling strategy for process-rich simulations of integrated surface and subsur-  
 face thermal hydrology in tundra systems with low topographic gradients. The  
 70 approach is intended for spatial scales intermediate between microtopography-  
 resolving fine-scale simulations and the scale of an Earth system model grid cell.  
 We demonstrate with simulations of polygonal tundra, large and carbon-rich re-  
 gions of northern Siberia, Alaska, and Canada where soil cracking has led to  
 the formation of subsurface ice wedges that honeycomb the subsurface and tes-  
 75 selate the land surface into polygonal patterns. Rather than solve a fully three-  
 dimensional subsurface system tightly coupled to surface processes as in [30],  
 we take advantage of physical insights gained from fine-scale simulations and  
 approximate the integrated surface/subsurface dynamics with mutually inde-  
 pendent 1-D columns, each associated with an ice wedge polygon. The columns  
 80 are then sequentially coupled to a surface thermal flow system, solving the sur-  
 face problem in an operator-split manner. This mixed-dimensional modeling  
 approach is motivated by fine-scale simulations at the ice-wedge polygon scale  
 that showed that differences in the thermal conditions among centers, rims and  
 troughs of ice-wedge polygons are largely equilibrated by lateral heat transport  
 85 during summer such that the system behaves similarly to a one-dimensional  
 system on seasonal time scales. Mixed-dimensional model structures have been  
 used previously in simulations of variably saturated flow at watershed scales,  
 in particular to couple multiple 1-D unsaturated (vadose) zone representations  
 to a two- or three-dimensional saturated zone; for example see [33, 34, 35].  
 90 Here we apply the mixed-dimensional model structure to an integrated sur-

face/subsurface flow system including surface and subsurface thermal processes and evaluate the accuracy and computational advantages of the approximation.

The paper is organized as follows: Section 2 highlights the Advanced/Arctic Terrestrial Simulator (ATS) and the Arcos multiphysics management framework, within which we implemented our approach. Section 3 presents some fine-scale simulation results and analysis that motivated the approach. In Section 4 we introduce our mixed-dimensional modeling approach, loosely coupled scheme and the ATS refactoring strategy. To illustrate the performance and efficiency of our modeling strategy, in Section 5 we compare our numerical results with the three-dimensional simulations based on strong coupling, and present speedup and scalability of the new technique. Concluding remarks and future research are offered in Section 6.

## 2. The ATS Software

We implemented our mixed-dimensional modeling strategy in open-source parallel software known as Amanzi-ATS [36] (or simply ATS). Amanzi-ATS is the result of extending the flow and reactive transport simulator Amanzi [37] by adding an advanced multiphysics management system known as Arcos [31]. Arcos is key to managing the complex spatial structures used here. It was originally built to manage couplings among process models (denoted process kernels and abbreviated as PKs), which may be selected at runtime. A PK encapsulates the mathematical representation of a particular physical process or coupled set of processes; PKs are coupled together through Multiprocess Coordinators MPCs. An MPC is regarded as a PK by MPCs at higher levels in the tree, thus allowing complex hierarchical model structures to be built dynamically at runtime. In this work, we used Arcos to coordinate not only process kernels but also subdomains of the larger spatial domain.

Amanzi, and by extension ATS, uses the Trilinos [38] framework for parallel infrastructure. An unstructured mesh framework [39] is included for interacting with the computational mesh. General polyhedral meshes are supported.

120 Discretization accuracy is maintained on the potentially distorted grids through the use of the mimetic finite difference (MFD) method [40, 41]. The backward Euler method is used for time stepping with a Nonlinear Krylov Acceleration (NKA) method [42, 43] to solve the resulting discretized residual equations.

The initialism ATS may refer to either the Advanced Terrestrial Simulator, 125 which is the general capability, or the Arctic Terrestrial Simulator, which is one particular configuration [30], depending on context. The Arctic Terrestrial Simulator configuration solves strongly coupled surface energy balance, and surface and subsurface thermal hydrology with freeze/thaw dynamics. This work extends the ATS to work with a multicolumn spatial structure.

### 130 3. Motivation: Results from Fine-scale Simulations

This mixed-dimensional approach is motivated by the results of fine-scale, two-dimensional simulations on vertical cross-sections across ice-wedge polygons at the Barrow Environmental Observatory. The simulations coupled a surface energy balance model with and without snow, snow distribution models, models 135 for thermal overland flow including phase change, and a recently developed three-phase subsurface thermal hydrology model. The soil properties were calibrated against borehole temperature data in a previous study [44]. The simulations were forced with meteorological data for the site. Those simulations used an unstructured mesh that conforms to surface topography derived from lidar 140 measurements. Horizontal mesh resolution is approximately 0.25 m. Vertical resolution is 0.02 cm at the surface and gradually increases with depth. Details on boundary conditions and the spinup process can be found in [30].

Snapshots of ice and liquid saturation indices in cross-section across two ice-wedge polygons are shown in Fig. 1. These snapshots are for October 15, 145 2013, which is during the fall freeze-up. During this period, the rims of the ice-wedge polygons are significantly colder than the centers and troughs because the thermally insulating snowpack is smaller on the rims. Previous one-dimensional simulations [45] have shown that thermal differences caused by differences in

snow depth lead to differences in active layer thickness, the depth of the annual  
 150 thaw. However, in the two-dimensional simulations shown here, the active layer  
 thickness shows little variation across the polygon (Fig. 2). Although transient  
 differences in subsurface temperature occur due to differences in snow depth, soil  
 moisture content, and albedo, lateral heat transport is sufficient to equilibrate  
 those differences by the time of maximum thaw. Thus, the active layer thickness,  
 155 which is a primary control on the annual carbon decomposition rates, is not  
 directly affected by microtopographic position within an ice-wedge polygon in  
 cases where organic matter is relatively uniform. This lack of sensitivity suggests  
 a model structure where the ice-wedge polygon becomes the unit computational  
 cell on the surface.

## 160 4. An Intermediate-scale Model

Our intermediate-scale model has two components: a spatial structure that  
 combines one-dimensional and two-dimensional domains, and an operator split-  
 ting scheme for coupling. We describe those aspects in this section followed by  
 the refactoring strategy of the ATS.

### 165 4.1. *Mixed-Dimensional Modeling Approach*

Our modeling strategy splits a 3D domain into  $2N + 1$  subdomains, where  
 $N$  is the total number of surface elements. The workflow starts with a two-  
 dimensional tessellation of the land surface, where each polygon in the surface  
 mesh corresponds to an ice-wedge polygon. Standard mesh generation tools are  
 170 then used to construct a 3D mesh by extruding each of the surface polygons  
 vertically into the subsurface. This 3D mesh represents the entire domain of in-  
 terest and is referred to as the primal mesh. Within ATS, the 3D primal mesh is  
 then subdivided into  $2N + 1$  submeshes, where  $N$  is the total number of surface  
 elements. The total  $2N + 1$  subdomains include  $N$  subdomains for 1D subsur-  
 175 face columns (on which flow and energy equations are solved),  $N$  subdomains  
 as the surface of those columns (on which surface water and energy storage is

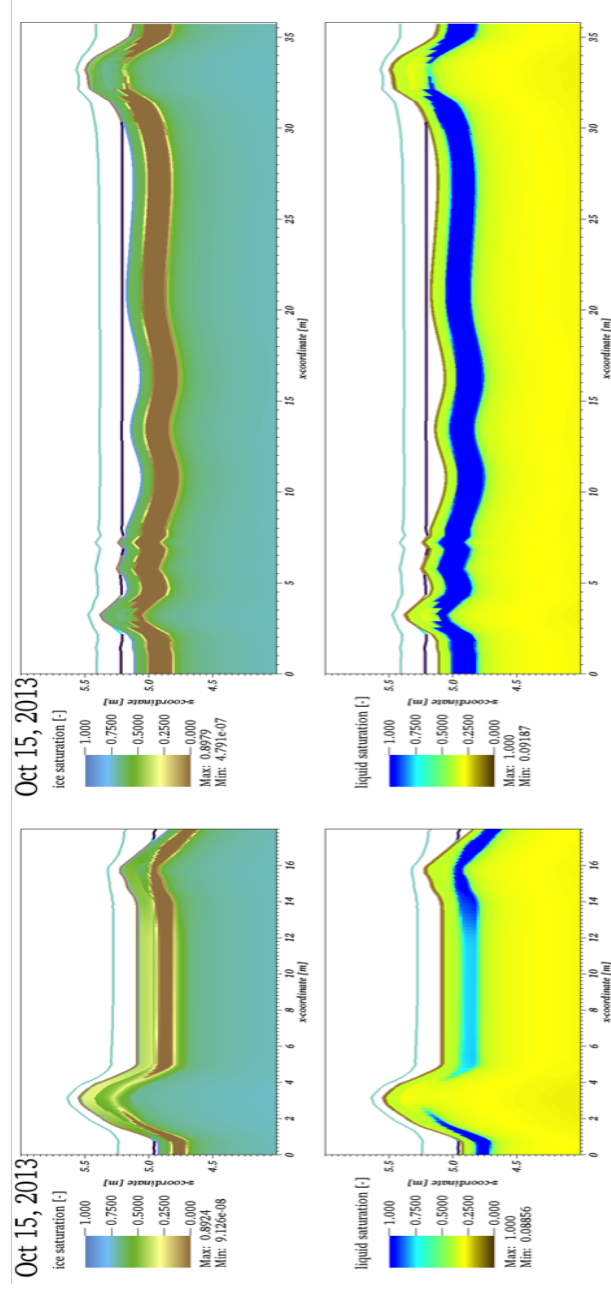


Figure 1: Results from two-dimensional fine-scale modeling. Shown are snapshots of ice saturation index and liquid saturation index in cross-sections across two ice-wedge polygons.



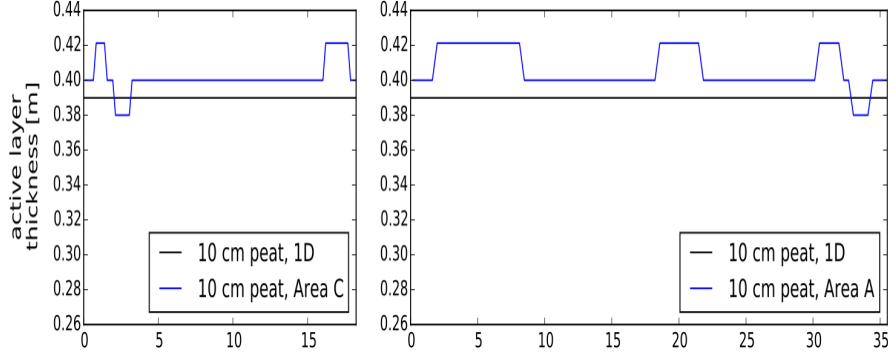


Figure 2: Active layer thickness from fine-scale modeling. Note that the mesh resolution here is  $2\text{cm}$ , and the discontinuities reflect jumps between cells of the mesh.

tracked along with a surface energy balance calculation), and one subdomain for the 2D overland system, on which lateral surface flow is solved. To avoid confusion, hereafter the 2D overland system is referred to as surface\* system, and the surface cell of each 1D columns will be called a surface system. The 1D columns and surface\* system are highlighted in Fig. 3. Arcos represents physics on these domains as a hierarchical PK tree which shows how the processes are coupled on and across these domains, as illustrated in Fig. 4. The PK tree consists of individual conservation equations, strong (globally implicit) couplers, and weak (sequential) couplers highlighted in blue, light cyan, and orange colors, respectively. In our approach, the interaction at the interface between the surface\* and 1D columns happens at the top level weak MPC. The strong MPC (on the left at the second level) is the surface\* system. The weak MPC at the second level iterates over all the surface and subsurface subdomains. The PK-I,  $I = 1, 2, 3, \dots, N$  denote integrated surface (a cell) and subsurface (1D column) system. The tree attached to the black octagon shape is replicated across all PK-I,  $I = 1, 2, 3, \dots, N$ .

#### 4.2. Operator Splitting Scheme

The operator splitting scheme for advancing our mixed-dimensional model is a two-step sequential algorithm. First, we solve the surface\* thermal hydro-

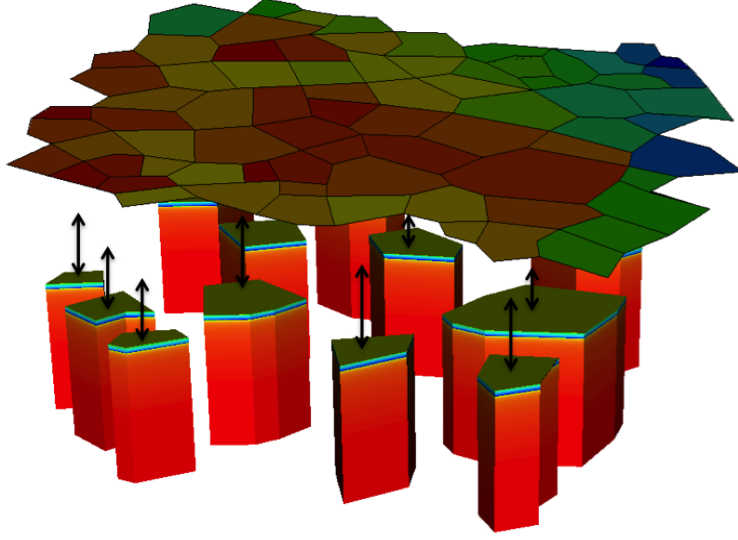


Figure 3: An illustration of the independent 1D subsurface columns coupled to the surface\* system. The surface system (1D cells lying on the top of corresponding columns) are not shown.

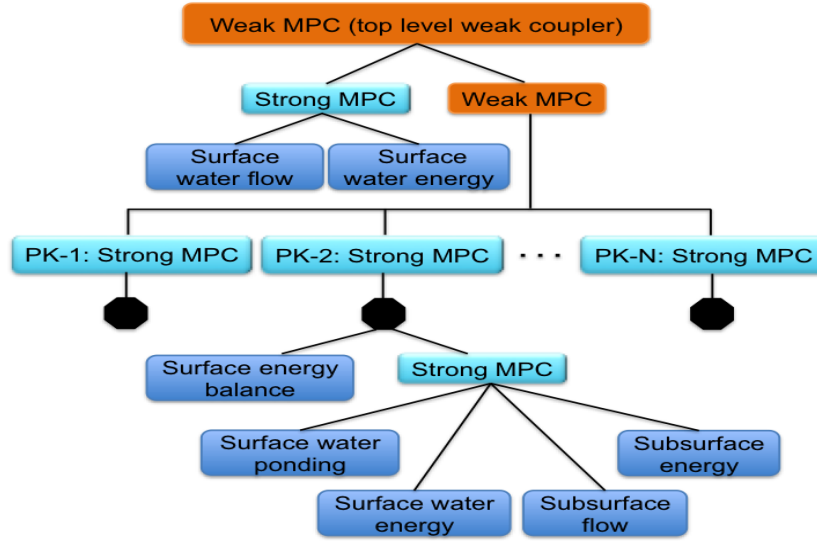


Figure 4: A customized hierarchical structure of the process kernels. Blue blocks highlights independent process models; Light blue blocks strongly coupled independent process kernels; Orange blocks represent weak couplers.

ogy system without any external or exchanged sources and then compute the solution of the one-dimensional columns. Each 1D column is a system of the subsurface thermal hydrology, surface ponding and energy exchange but no lateral flow, and surface energy balance. The first step mainly acts as a spatial distributor of the mass and energy. That is, it distributes the water and energy across the 2D overland system, and its solution serves as initial condition for the second step. After the update from the first step, we solve the family of 1D columns, and use the output of that half-step to update the surface\* pressure and temperature for the next iteration in the algorithm. As depicted in Fig. 5, the top and bottom orange spots represent 2D surface\* system and 1D columns, respectively, and the cyan colors (in the middle) are intermediate steps for updating surface\* and 1D column systems. For the sake of clarity, we will refer to the pressure and temperature fields of the first step as surface\* pressure and temperature, while that of the second step will be called as subsurface and surface pressures and temperatures.

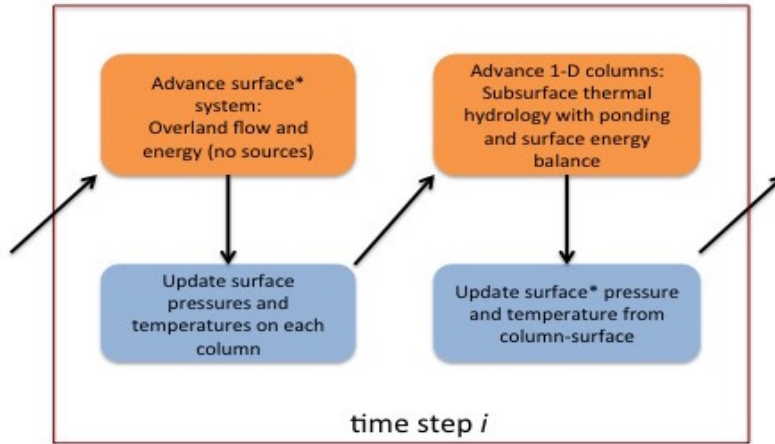


Figure 5: Schematic of the loosely coupled scheme for our mixed-dimensional model. Orange represents advancement of PKs in time; blue shows intermediate steps for initialization of PKs within a single time step.

### 4.3. *ATS Refactoring Strategy*

The ATS was significantly refactored to accommodate the above customized scheme. Arcos’s state object stores a dynamic, runtime-determined set of simulation data. Each data is identified by a unique key, e.g. “ponded\_depth”,  
215 and a set of metadata including domain of applicability, mesh entity, number of degrees of freedom, etc. In order for each PK to be instantiated multiple times, that PK’s data was altered to enforce uniqueness of its keys by prefixing a domain identifier such as “column\_0\_surface-ponded\_depth”. This refactoring allows multiple instances of any given PK, each attached to a different mesh  
220 representing a subdomain of the primary mesh.

Furthermore, Amanzi-ATS relies on a meshing infrastructure, MSTK, [39] which can generate meshes as subdomains or subsets of existing meshes. This framework was extended to allow column meshes to be generated from an existing three-dimensional mesh. In this workflow, a surface mesh consisting of the  
225 surface polygons are extruded vertically, following pre-determined soil horizon structure, to create a 3D mesh. By insisting that the extrusion process works only in the vertical, well-defined columns then exist in the the three-dimensional mesh. At run-time, columns can then be identified, and extracted to form a one-dimensional mesh. This mesh is altered to ensure it is a one-dimensional  
230 submanifold of three-dimensional space, i.e. each cell has two faces, and all face-normals are  $\pm\hat{z}$ . Once this is done, Amanzi-ATS’s existing operators can work on this mesh without changes. Furthermore, this mesh follows polygonal ground, and therefore consists of stacked polygonal-prisms. Few mesh capabilities support this fully-unstructured mesh type; a Silo[46] capability was added to  
235 to Amanzi-ATS’s existing output options to enable visualization of the resulting solution.

Each of these refactors was accomplished in reasonable time thanks to a close adherence to computational software best-practices. A series of unit and regression tests were added for each new capability, and the existing regression  
240 tests were updated with the domain prefixes. Version control enabled close collaboration on this process across multiple developers, and project-management

Kanban tools were used to ensure each developer in the workflow knew the needs of the client code component. These best-practices, along with the use of libraries such as Silo, MSTK, and Arcos, greatly improved the efficiency of what otherwise would have been a significant development effort.

## 5. Results and Discussions

In this section, we present numerical results that highlights the accuracy and efficiency of our modeling technique. At the development stage, several numerical experiments were performed to verify the physical behavior of the refactored modules (PKs) of the ATS, code verification details are presented in Appendix A. The spinup process (i.e., model’s initialization) has been described in detail in [30].

### 5.1. Numerical Results – A Comparative Study

To demonstrate the accuracy of our modeling technique, we compare numerical results of the mixed-dimensional model against a fully coupled three-dimensional simulations that act as a benchmark for our simulations. The domain under consideration has surface elevation varying between 4.14-4.62 m, is 40 m deep, and enclosed by a rectangle in the horizontal plane  $173 \times 160$  m<sup>2</sup>; see Fig. 6. This domain is a part of the low-gradient polygonal tundra in Barrow, Alaska and consist of 75 ice wedge polygons. As highlighted in Fig. 6, we select five spots (based on different elevations) to perform a location-based comparison of the numerical results of the two schemes.

In addition to evaluating the quality of our mixed-dimensional approach for the Barrow tundra, we also want to understand when it will give inaccurate results. Because our modeling strategy is based on a loosely coupled scheme and neglects subsurface lateral flow between ice wedge polygons, it should eventually become inaccurate if the topographic relief is sufficiently large. To identify the range of applicability, we consider three variants of the surface topography. We use the following equation to exaggerate the surface topography,

$$\bar{Z} = \alpha(Z - \mu) + \mu. \quad (1)$$

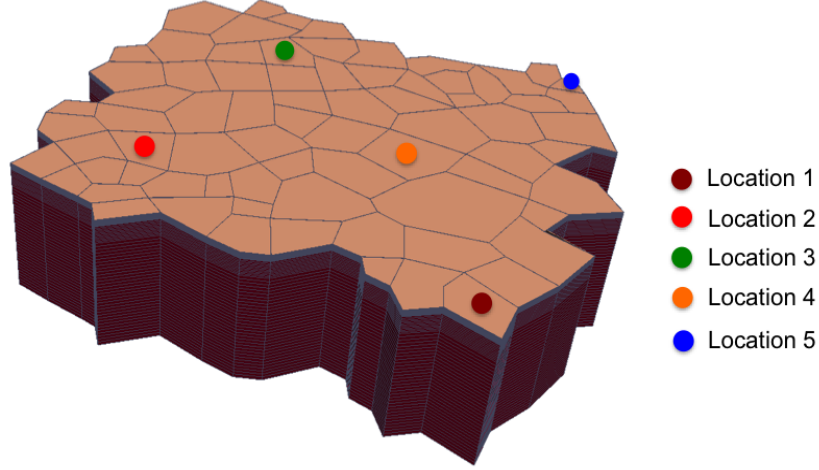


Figure 6: An illustration of the five spatial locations on 75 polygons cluster for location-based comparison of the two schemes. Location 1: Outlet. Location 2: High elevated spot. Location 3-4: Intermediate elevation spots. Location 5: Lowest elevation spot.

Here  $\bar{Z}$  is the exaggerated elevation,  $Z$  is the original elevation with mean  $\mu$ , and  $\alpha$  is the exaggeration parameter. Equation (1) preserves the mean while the standard deviation depends on the value of  $\alpha$  and is given in meters by  $0.14\alpha$ . The coefficient in front of  $\alpha$  is the standard deviation of the original elevation  $Z$  – in our case  $Z$  correspond to the domain shown in Fig. 6. Our three variants correspond to  $\alpha = 1, 3$ , and  $5$ . The value  $\alpha = 1$  corresponds to the original topography. We expect the model to give promising results for simulating low-gradient polygonal tundra, and believe that the values of  $\alpha$  we choose provide sufficient variation across a domain of 100s of meter. Our numerical experiments confirm a high agreement between the results of the mixed-dimensional model and the 3D model at all selected location for all three  $\alpha$  values. Figs. 7 and 8 compare the subsurface water saturations and temperatures, respectively, at locations 1 and 5 and for  $\alpha = 1$ . The accuracy of our results for the Barrow topography ( $\alpha = 1$ ) is evident. The surface ponded depths and temperatures obtained with the two models are depicted in Fig. 9 and 10, respectively. As expect, our results fit the 3D model's results very well. We see the same level

of agreement at the other locations as well, but we are not showing them here.

280 In Fig. 11 we plot the mean annual thaw depth at five locations for the three  
variants,  $\alpha = 1, 3$ , and 5. We use the annual mean of the thaw depth rather  
than the maximum thaw depth (i.e. the active layer thickness) because the  
mean annual thaw depth depends on both the duration of thaw and maximum  
thaw depth. Thus it is a direct measure of soil available for decomposition,  
285 averaged over the year. Not surprisingly, as the value of  $\alpha$  increases the mean  
annual thaw depth deviates from the results of the 3D model to some extent,  
but we still see the results of the mixed-dimensional model agree well with  
to the corresponding benchmark solution. The consistency of our numerical  
results with the fully coupled 3D simulations confirm the appropriateness of  
290 this approximated scheme.

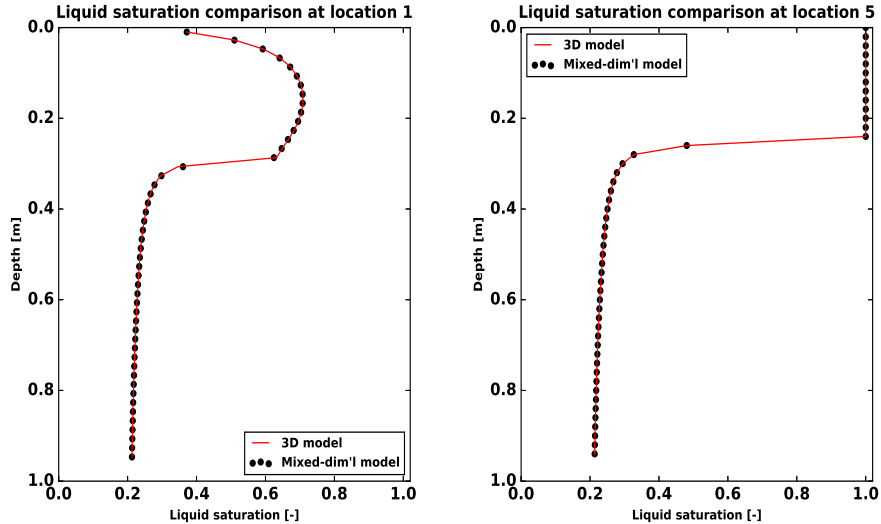


Figure 7: Comparison of the subsurface water saturation at locations 1 and 5 during the summer.

## 5.2. Speedup Study

We discuss speedup and parallel efficiency for two spatial domains, one with 75 polygons as depicted in Fig. 6 and a larger one consisting of 468 ice-wedge

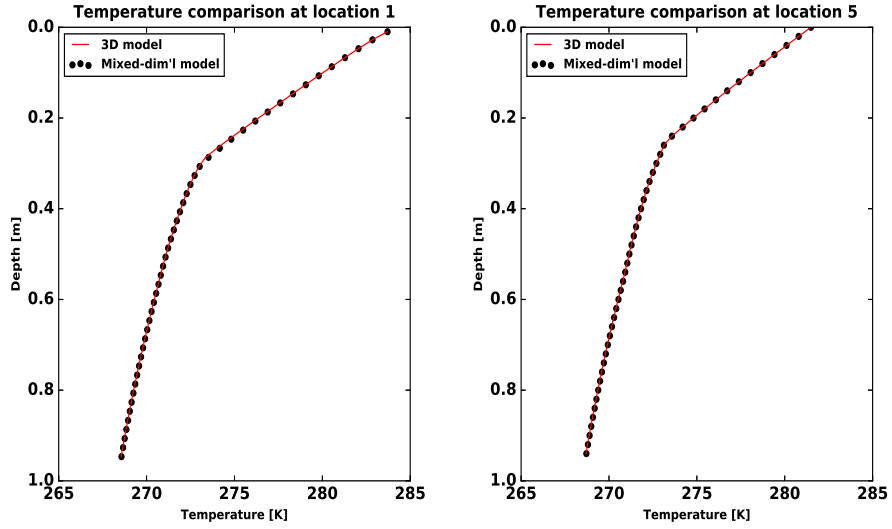


Figure 8: Comparison of subsurface temperature at locations 1 and 5 during the summer.

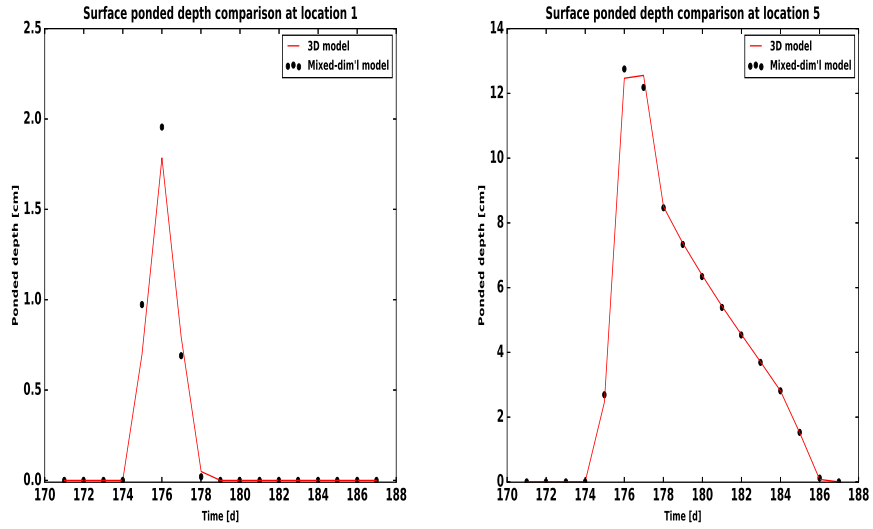


Figure 9: An illustration of the surface ponded depths of the two schemes at locations 1 and 5 when the snow melt starts.



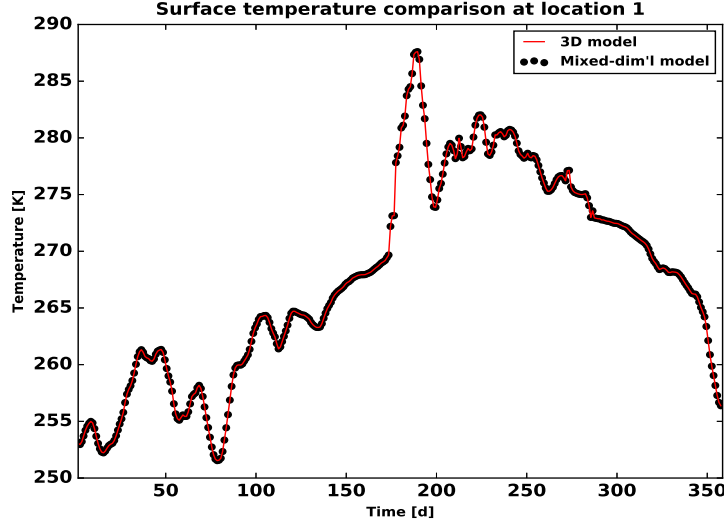


Figure 10: An illustration of the surface temperature of the two schemes at location 1 for the entire year.

polygons, as shown in Fig 12. The surface ponded depth and temperature during  
the snowmelt in 2012 are presented in Fig. 13 for the 468 polygon domain. Fully  
coupled 3D simulations at such a scale are computationally very expensive.

We highlight two aspects of the efficiency of this modeling approach: (i) how  
the simulation time decreases in comparison with three-dimensional simulations,  
and (ii) how efficiently it scales with number of processes.

Fig. 14 compares the computational time of the multidimensional strategy  
versus the three-dimensional solution for the domain consisting of 75 columns.  
It can be seen that for a fixed number of processors, the computational time  
decreases by a factor of about four with the multidimensional technique. This  
is a huge computational advantage without sacrificing numerical accuracy.

We show parallel strong scaling for the aforementioned domains in Fig. 15.  
Speedup of the smaller domain is significantly less than the linear ideal; this  
is caused by communication overhead in the surface\* system. Without consid-  
eration of the surface\* system, the problem is perfectly parallel. To minimize

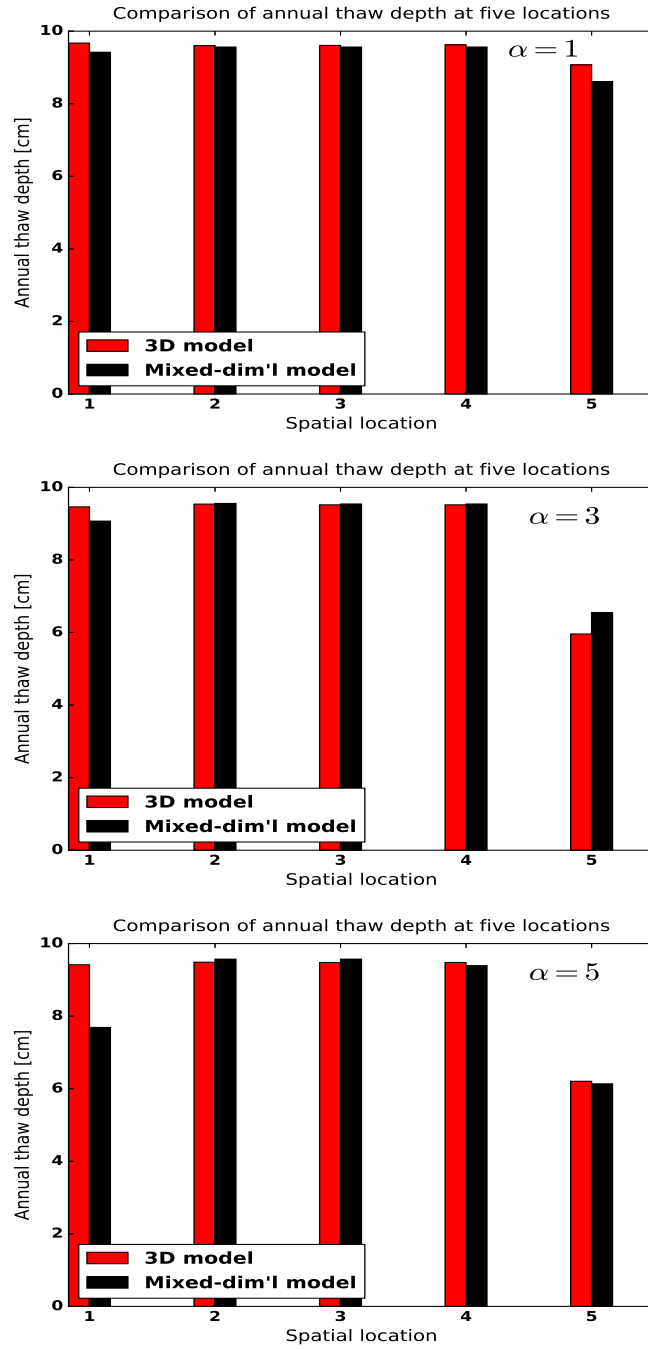


Figure 11: A comparison of the annual thaw depth at the selected locations of the three studies.

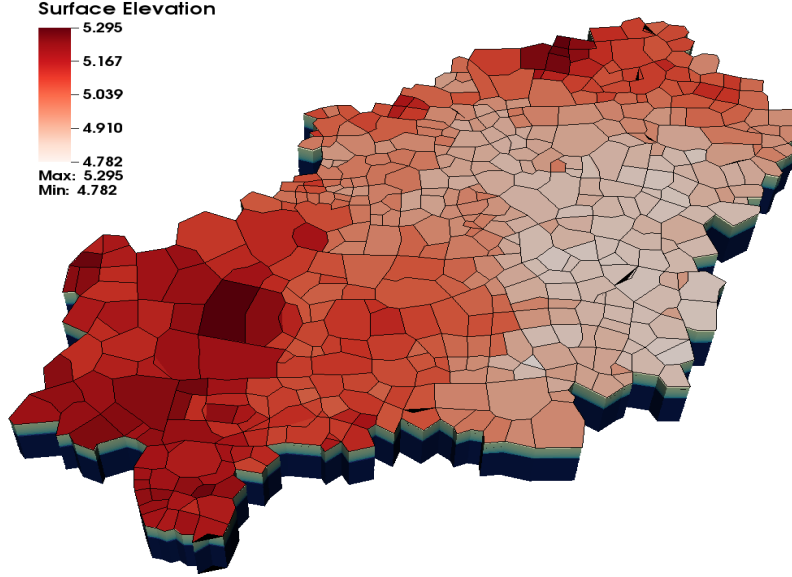


Figure 12: A watershed at Barrow, Alaska.

communication between the surface\* system and the column systems, the surface\* mesh is partitioned so that a column and the coincident mesh cells on the surface\* system reside on the same processor. If there are too few columns per processor, the interprocessor communication for the surface\* system becomes the limiting factor despite the lower computational burden for the surface\* system compared with the columns. As expected, the scaling is better for a larger domain. Scaling is close to linear up to about 16 cores, which corresponds to about 30 columns per core.

### 5.3. Subcycling Process Kernels

One advantage of sequentially coupling different PKs, as opposed to a fully coupled approach, is that sequential coupling makes subcycling possible. With subcycling, individual PKs take their own time step rather than a global time step. The independently evolving PKs are then synchronized on a larger time step. The idea is to assign a suitable local time-step to each subdomain rather

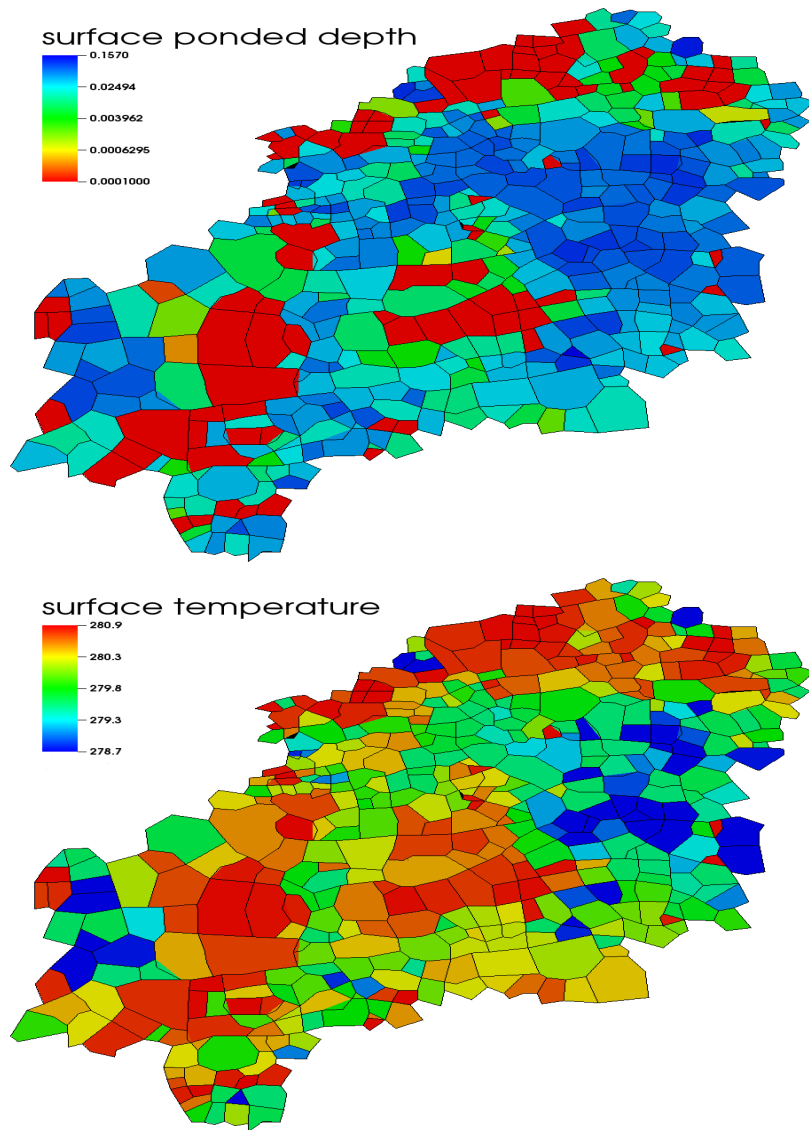


Figure 13: Simulation results of the mixed-dimensional model. Showing the surface ponded depth and temperature during the snowmelt of 2012.

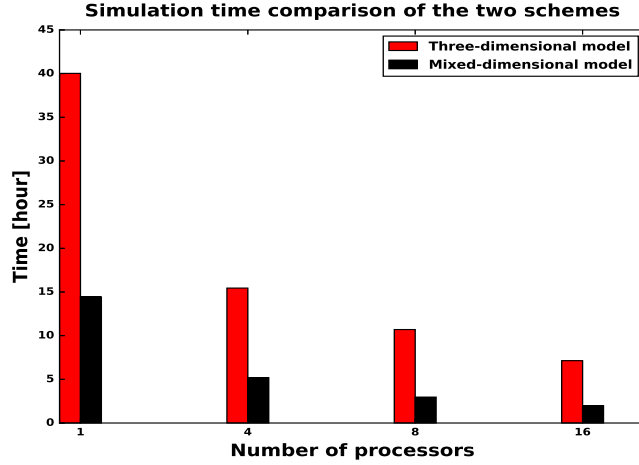


Figure 14: A comparison of the computational time taken by the mixed-dimensional and 3D models.

than one single global time-step. It is a very convenient approach for simulating permafrost type regions because a relatively small time step may be required  
 325 when a cell is going through a phase change. Without subcycling, a timestep failure or small timestep caused by phase change in a single cell results in a small global time step. With subcycling, the effects of that phase transition are limited to a single column. Our mixed-dimensional modeling approach efficiently allows subcycling PKs because we discretize subsurface as independent  
 330 columns/subdomains. Thus, the subdomains can advance in time with their preferred time-steps until they hit the synchronized time. Fig. 16 displays percentage reduction in the simulation time for the domains consisting of 21, 75, and 468 polygons. With the increase in the number of subsurface columns the computational time decreases, and we see up to 40% reduction in the compu-  
 335 tational time in comparison with simulations without subcycling. The choice of the synchronization time is crucial, and requires further optimization, which will be studied in future work.

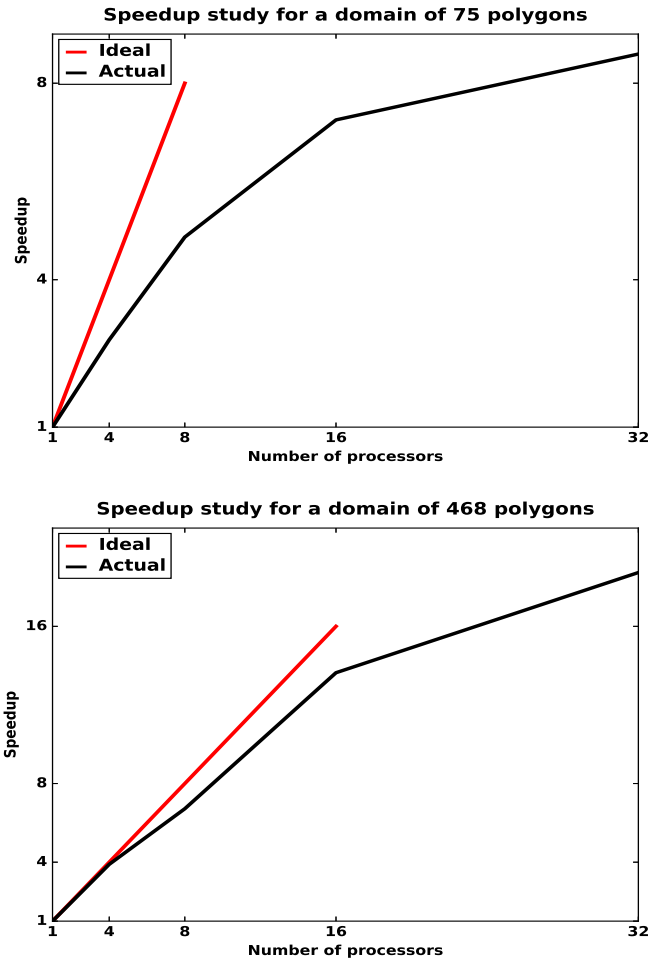


Figure 15: An illustration of the speedup study of a simulation with 75-polygon cluster (top) and 468 polygons barrow watershed (bottom).

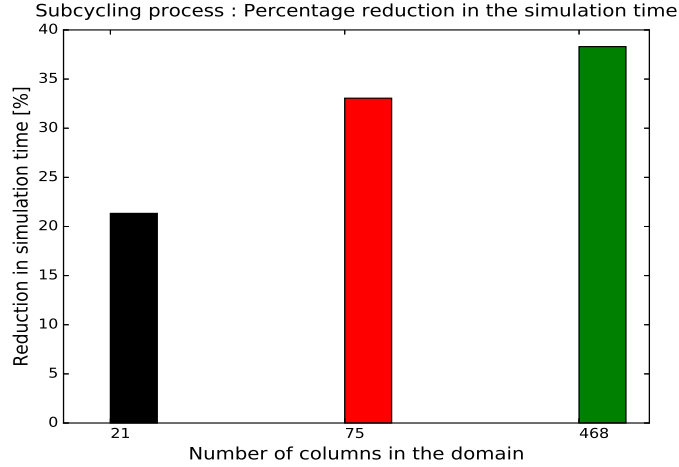


Figure 16: (Subcycling PKs) Percentage reduction in the computational time for the domains consisting of 21, 75 and 468 polygons.

## 6. Conclusions and Future Work

Out intermediate-scale model for integrated surface/subsurface thermal hydrology of low-relief permafrost-affected regions is constructed from two components: a mixed-dimensional spatial structure that is based on discretizing the subsurface as independent columns that are indirectly coupled through a two-dimensional surface system, and an operator splitting scheme for coupling the column domains to the surface system. The spatial structure was motivated by fine-scale simulations of permafrost regions. This is the first demonstration of advanced representations of freezing soil physics coupled to overland thermal flow and surface energy balance at scales of 100s of meters.

An operator splitting algorithm is used to advance our mixed-dimensional model. First, we solve a two-dimensional surface thermal hydrology system that spatially distributes mass and energy, and initializes the system of the second step. The second step solves a family of independent one-dimensional columns, where each represents an integrated system of the subsurface, surface ponding and surface energy balance. That step updates the 2D surface system of the first step for the next iteration.

355 We compared our numerical results to the conventional scheme of a fully 3D  
subsurface that is strongly coupled to a surface system to demonstrate the effi-  
ciency and accuracy of our modeling approach. The fully coupled results act as  
a benchmark for our scheme. Numerical results show our scheme closely approx-  
imates the fully coupled system but is significantly more efficient. The scheme  
360 also allows for subcycling of individual subdomains, which further improves the  
numerical efficiency.

This work is part of a larger effort to provide process-rich, watershed-scale  
simulations capability for permafrost regions. A next step would be to incorpo-  
rate a subgrid model to represent the effects of variations of topography below  
365 our discretization unit of the ice wedge polygon. Another future direction is  
to represent thaw-induced subsidence. Thawing of permafrost and melting of  
massive subsurface ice can cause differential subsidence, leading to dynamic  
microtopography (low-centered polygons can transform to high-centered poly-  
gons) [47, 48], substantial changes in hydrology and soil moisture, and altered  
370 drainage networks, thus potentially transforming a dry region to a wetland  
ecosystem [49, 50]. This modeling strategy is designed to tractably represent  
thaw-induced subsidence. Representing subsidence in one dimension is signif-  
icantly easier than a fully three-dimensional representation because mesh tan-  
gling and other mesh quality issues arise in a fully three-dimensional dynamic  
375 mesh but are avoided in one dimension. Indeed, simulations of thaw-induced  
subsidence on a single one-dimensional integrated surface/subsurface system has  
already been demonstrated [14]; the work described here will allow the same  
techniques to be used at scale with many columns coupled to an overland flow  
system. Lastly, refactoring ATS not only supports subdomain modeling tech-  
380 niques but is also potentially useful future extensions. We can efficiently imple-  
ment and independently test many process representations (physical, chemical,  
biological and geological processes) as PKs and let them interact through MPCs.

Although we mainly focus on simulating the thermal hydrology of degrad-  
ing permafrost, elements of the work presented here have greater applicability.  
385 A hybrid spatial structure mixing one-dimensional representations of the va-



dose zone with two-dimensional representations of the saturated zone and over-land flow system are important approximations in watershed modeling. This operator-split scheme of Fig. 5 is broadly applicable to those systems and to integrated surface/subsurface simulations, in general. This mixed-dimensional  
 390 representation may be used as an alternative to a fully coupled system or as a way of accelerating the time-consuming task of spinup. In addition, this work demonstrates the advantages of Arcos or other multiphysics management frameworks in greatly simplifies the process of building models with hybrid spatial structure.

## 395 **Appendix A. Numerical Experiments – Code Verification**

We have performed a series of tests at the development stage for code verification, and compared our results against numerical solution of three-dimensional model. The 3D results serve as a benchmark for our scheme. In 3D models the surface and subsurface systems are strongly coupled and solved implicitly.  
 400 Since our model required major refactoring of the ATS, so individual pieces of the code were deeply tested before integration – they are listed below:

- Problem Test 1 (Subsurface Flow): We consider multiple subsurface columns with flat top surface – each column is an independent domain. Put water table below the surface, infiltrates and fills the subsurface columns.
- 405 • Problem Test 2 (Surface and Subsurface Flow only): This is an extension of the Test 1. We put water table below the surface. Water infiltrates and fill subsurface columns prior to surface ponding.
- Problem Test 3 (Subsurface Thermal Hydrology): We add energy equation to Test 1. Initially, establish water table close to the surface, and start  
 410 freezing from below. The frozen subsurface columns are thawed from the top.
- Problem Test 4 (Surface and Subsurface Thermal Hydrology): In this test, we incorporate surface thermal hydrology into Test 3. A warm rain

precipitation thaws the subsurface columns, saturate them and afterwards  
water ponds on the surface.

- Problem Test 5 (Surface Energy Balance, Surface and Subsurface Thermal Hydrology): A fully integrated surface and subsurface processes test. We introduce an energy balance equation to Test 4. An initially established ice table below the surface has been thawed by warm rain, incoming-short radiation and air temperature.

Due to symmetry in the domains of above numerical tests, that is, the subsurface columns are copies of each other and surface is flat, we get identical results and compare very well with its corresponding three-dimensional simulation results. Passing all the above tests conclude refactoring of the ATS a success. In the preceding discussion, we consider general polyhedra due to the polygonal structure of the Arctic landscape.

## References

- [1] J. Brown, O. Ferrians Jr, J. Heginbottom, E. Melnikov, Circum-Arctic map of permafrost and ground-ice conditions, 45, 1997.
- [2] M. T. Jorgenson, C. H. Racine, J. C. Walters, T. E. Osterkamp, Permafrost degradation and ecological changes associated with a warming climate in central alaska, Climatic change 48 (2001) 551–579.
- [3] E. A. G. Schuur, A. D. McGuire, C. Schaedel, G. Grosse, J. W. Harden, D. J. Hayes, G. Hugelius, C. D. Koven, P. Kuhry, D. M. Lawrence, S. M. Natali, D. Olefeldt, V. E. Romanovsky, K. Schaefer, M. R. Turetsky, C. C. Treat, J. E. Vonk, Climate change and the permafrost carbon feedback, NATURE 520 (2015) 171–179.
- [4] G. Hugelius, J. Strauss, S. Zubrzycki, J. W. Harden, E. A. G. Schuur, C.-L. Ping, L. Schirrmeister, G. Grosse, G. J. Michaelson, C. D. Koven, J. A. O'Donnell, B. Elberling, U. Mishra, P. Camill, Z. Yu, J. Palmtag,

P. Kuhry, Estimated stocks of circumpolar permafrost carbon with quantified uncertainty ranges and identified data gaps, *Biogeosciences* 11 (2014) 6573–6593.

445 [5] J. Turner, J. E. Overland, J. E. Walsh, An arctic and antarctic perspective on recent climate change, *International Journal of Climatology* 27 (2007) 277–293.

[6] J. Hansen, R. Ruedy, J. Glascoe, M. Sato, Giss analysis of surface temperature change, *Journal of Geophysical Research: Atmospheres* 104 (1999) 30997–31022.

450 [7] A. C. I. Assessment, Impacts of a warming arctic-arctic climate impact assessment, *Impacts of a Warming Arctic-Arctic Climate Impact Assessment*, by Arctic Climate Impact Assessment, pp. 144. ISBN 0521617782. Cambridge, UK: Cambridge University Press, December 2004. 1 (2004).

455 [8] C. D. Koven, B. Ringeval, P. Friedlingstein, P. Ciais, P. Cadule, D. Khvorostyanov, G. Krinner, C. Tarnocai, Permafrost carbon-climate feedbacks accelerate global warming, *Proceedings of the National Academy of Sciences* 108 (2011) 14769–14774.

[9] T. Osterkamp, Response of alaskan permafrost to climate, in: *Fourth International Conference on Permafrost*, Fairbanks, Alaska, 1983, pp. 17–  
460 22.

[10] M. A. Walvoord, R. G. Striegl, Increased groundwater to stream discharge from permafrost thawing in the yukon river basin: Potential impacts on lateral export of carbon and nitrogen, *Geophysical Research Letters* 34 (2007).

465 [11] S. Lyon, G. Destouni, R. Giesler, C. Humborg, C.-M. Mörtz, J. Seibert, J. Karlsson, P. Troch, Estimation of permafrost thawing rates in a sub-arctic catchment using recession flow analysis, *Hydrology and Earth System Sciences* 13 (2009) 595–604.

- [12] R. K. Pachauri, M. Allen, V. Barros, J. Broome, W. Cramer, R. Christ,  
470 J. Church, L. Clarke, Q. Dahe, P. Dasgupta, et al., Climate change 2014:  
Synthesis report. contribution of working groups i, ii and iii to the fifth  
assessment report of the intergovernmental panel on climate change (2014).
- [13] C. D. Koven, W. J. Riley, A. Stern, Analysis of permafrost thermal dy-  
namics and response to climate change in the CMIP5 earth system models,  
475 Journal of Climate 26 (2013) 1877–1900.
- [14] S. Painter, J. Moulton, C. Wilson, Modeling challenges for predicting  
hydrologic response to degrading permafrost, Hydrogeology Journal (2013)  
1–4.
- [15] B. L. Kurylyk, K. T. MacQuarrie, J. M. McKenzie, Climate change im-  
480 pacts on groundwater and soil temperatures in cold and temperate regions:  
Implications, mathematical theory, and emerging simulation tools, Earth-  
Science Reviews 138 (2014) 313–334.
- [16] R. Harlan, Analysis of coupled heat-fluid transport in partially frozen soil,  
Water Resources Research 9 (1973) 1314–1323.
- [17] G. L. Guymon, J. N. Luthin, A coupled heat and moisture transport model  
485 for arctic soils, Water Resources Research 10 (1974) 995–1001.
- [18] G. S. Taylor, J. N. Luthin, A model for coupled heat and moisture transfer  
during soil freezing, Canadian Geotechnical Journal 15 (1978) 548–555.
- [19] K. Takata, S. Emori, T. Watanabe, Development of the minimal advanced  
490 treatments of surface interaction and runoff, Global and planetary Change  
38 (2003) 209–222.
- [20] D. Nicolsky, V. Romanovsky, V. Alexeev, D. Lawrence, Improved modeling  
of permafrost dynamics in a gcm land-surface scheme, Geophysical research  
letters 34 (2007).

- 495 [21] D. M. Lawrence, A. G. Slater, S. C. Swenson, Simulation of present-day  
and future permafrost and seasonally frozen ground conditions in ccsm4,  
Journal of Climate 25 (2012) 2207–2225.
- [22] J. M. McKenzie, C. I. Voss, D. I. Siegel, Groundwater flow with energy  
transport and water–ice phase change: numerical simulations, benchmarks,  
500 and application to freezing in peat bogs, Advances in water resources 30  
(2007) 966–983.
- [23] V. Bense, G. Ferguson, H. Kooi, Evolution of shallow groundwater flow  
systems in areas of degrading permafrost, Geophysical Research Letters 36  
(2009).
- 505 [24] S. L. Painter, S. Karra, Constitutive model for unfrozen water content in  
subfreezing unsaturated soils, Vadose Zone Journal 13 (2014).
- [25] S. L. Painter, Three-phase numerical model of water migration in partially  
frozen geological media: model formulation, validation, and applications,  
Computational Geosciences 15 (2011) 69–85.
- 510 [26] R. E. Grimm, S. L. Painter, On the secular evolution of groundwater on  
mars, Geophysical Research Letters 36 (2009) n/a–n/a. L24803.
- [27] A. Frampton, S. Painter, S. W. Lyon, G. Destouni, Non-isothermal, three-  
phase simulations of near-surface flows in a model permafrost system under  
seasonal variability and climate change, Journal of Hydrology 403 (2011)  
515 352 – 359.
- [28] S. Karra, S. Painter, P. Lichtner, Three-phase numerical model for subsur-  
face hydrology in permafrost-affected regions, Cryosphere Discuss 8 (2014)  
149–185.
- 520 [29] P. C. Lichtner, G. E. Hammond, C. Lu, S. Karra, G. Bisht, B. Andre, R. T.  
Mills, J. Kumar, PFLOTRAN Web page, 2013. [Http://www.pflotran.org](http://www.pflotran.org).

- [30] S. L. Painter, E. T. Coon, A. L. Atchley, M. Berndt, R. Garimella, J. D. Moulton, D. Svyatskiy, C. J. Wilson, Integrated surface/subsurface permafrost thermal hydrology: Model formulation and proof-of-concept simulations, *Water Resources Research* 52 (2016) 6062–6077.
- 525 [31] E. T. Coon, J. D. Moulton, S. L. Painter, Managing complexity in simulations of land surface and near-surface processes, *Water Resources Research* 78 (2016) 134–149.
- [32] M. Dall’Amico, S. Endrizzi, S. Gruber, R. Rigon, A robust and energy-conserving model of freezing variably-saturated soil, *The Cryosphere* 5  
530 (2011) 469–484.
- [33] M. F. Pikul, R. L. Street, I. Remson, A numerical model based on coupled one-dimensional richards and boussinesq equations, *Water Resources Research* 10 (1974) 295–302.
- [34] Y. Zhu, Y. Zha, J. Tong, J. Yang, Method of coupling 1-d unsaturated  
535 flow with 3-d saturated flow on large scale, *Water Science and Engineering* 4 (2011) 357–373.
- [35] P. Hazenberg, Y. Fang, P. Broxton, D. Gochis, G.-Y. Niu, J. D. Pelletier, P. A. Troch, X. Zeng, A hybrid-3d hillslope hydrological model for use in earth system models, *Water Resources Research* 51 (2015) 8218–8239.
- 540 [36] E. T. Coon, ATS: The Advanced Terrestrial Simulator, 2016. <http://github.com/amanzi/ats>.
- [37] J. D. Moulton, M. Berndt, R. Garimella, L. Prichett-Sheats, G. Hammond, M. Day, J. Meza, High-level design of amanzi, the multi-process high performance computing simulator, office of environmental management,  
545 united states department of energy, washington dc (2012).
- [38] M. Heroux, R. Bartlett, V. H. Hoekstra, J. Hu, T. Kolda, R. Lehoucq, K. Long, R. Pawlowski, E. Phipps, A. Salinger, H. Thornquist, R. Tu-

minaro, J. Wil-lenbring, A. Williams, An overview of trilinos. Technical report sand2003-2927, Sandia National Laboratory (2003).

- 550 [39] R. V. Garimella, W. A. Perkins, M. W. Buksas, M. Berndt, K. Lipnikov,  
E. Coon, J. D. Moulton, S. L. Painter, Mesh infrastructure for coupled  
multiprocess geophysical simulations, *Procedia Engineering* 82 (2014) 34 –  
45.
- [40] L. B. da Veiga, K. Lipnikov, G. Manzini, The mimetic finite difference  
555 method for elliptic problems, volume 11, Springer, 2014.
- [41] K. Lipnikov, G. Manzini, M. Shashkov, Mimetic finite difference method,  
*Journal of Computational Physics* 257 (2014) 1163–1227.
- [42] M. T. Calef, E. D. Fichtl, J. S. Warsa, M. Berndt, N. N. Carlson, Nonlinear  
krylov acceleration applied to a discrete ordinates formulation of the k-  
560 eigenvalue problem, *Journal of Computational Physics* 238 (2013) 188–209.
- [43] N. N. Carlson, K. Miller, Design and application of a gradient-weighted  
moving finite element code i: in one dimension, *SIAM Journal on Scientific  
Computing* 19 (1998) 728–765.
- [44] A. L. Atchley, S. L. Painter, D. R. Harp, E. T. Coon, C. J. Wilson, A. K.  
565 Liljedahl, V. E. Romanovsky, Using field observations to inform thermal  
hydrology models of permafrost dynamics with ats (v0.83), *Geoscientific  
Model Development* 8 (2015) 2701–2722.
- [45] A. L. Atchley, E. T. Coon, S. L. Painter, D. R. Harp, C. J. Wilson, Influ-  
ences and interactions of inundation, peat, and snow on active layer thick-  
570 ness, *Geophysical Research Letters* 43 (2016) 5116–5123. 2016GL068550.
- [46] Lawrence Livermore National Laboratory, A mesh and field i/o library  
and scientific database, 2016. <https://wci.llnl.gov/simulation/computer-codes/silo>.

- [47] M. T. Jorgenson, Y. L. Shur, E. R. Pullman, Abrupt increase in permafrost  
575 degradation in arctic alaska, *Geophysical Research Letters* 33 (2006).
- [48] A. Liljedahl, L. Hinzman, J. Schulla, Ice-wedge polygon type controls  
low-gradient watershed-scale hydrology, in: *Proceedings of the Tenth International Conference on Permafrost*, volume 1, 2012, pp. 231–236.
- [49] L. D. Hinzman, N. D. Bettez, W. R. Bolton, F. S. Chapin, M. B. Dyurgerov,  
580 C. L. Fastie, B. Griffith, R. D. Hollister, A. Hope, H. P. Huntington, et al.,  
Evidence and implications of recent climate change in northern alaska and  
other arctic regions, *Climatic Change* 72 (2005) 251–298.
- [50] J. C. Rowland, C. E. Jones, G. Altmann, R. Bryan, B. T. Crosby, L. D.  
Hinzman, D. L. Kane, D. M. Lawrence, A. Mancino, P. Marsh, J. P. Mc-  
585 Namara, V. E. Romanvosky, H. Toniolo, B. J. Travis, E. Trochim, C. J.  
Wilson, G. L. Geernaert, Arctic landscapes in transition: Responses to  
thawing permafrost, *Eos, Transactions American Geophysical Union* 91  
(2010) 229–230.