



# The Best Solution

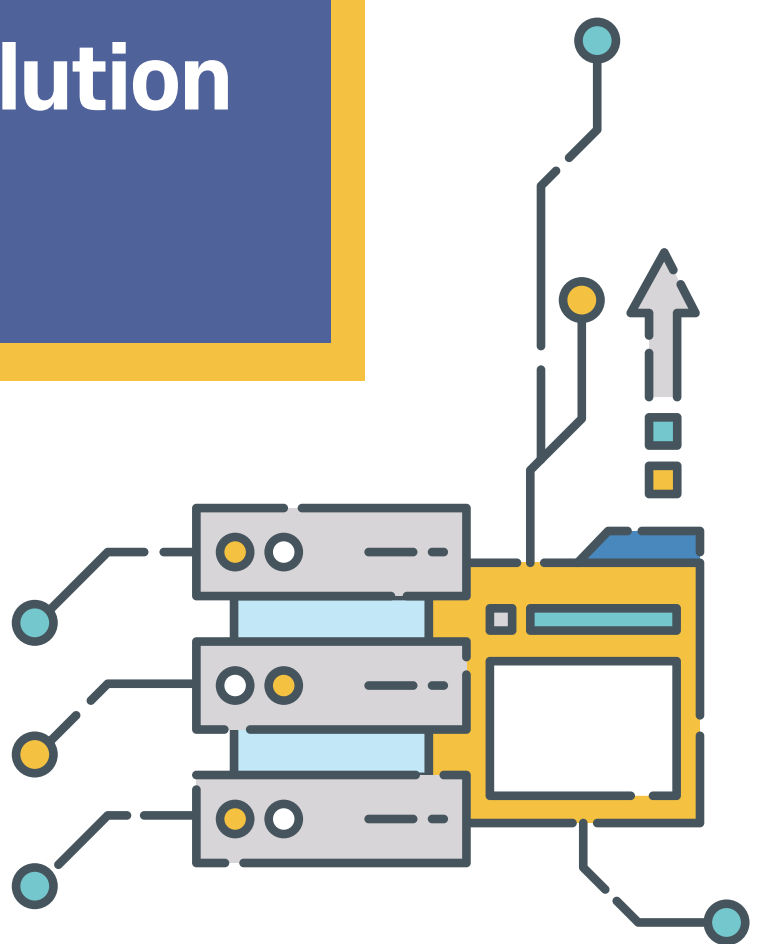

# JST Automotive

## For Electric Control Unit

Board-to-Wire Non-Waterproof

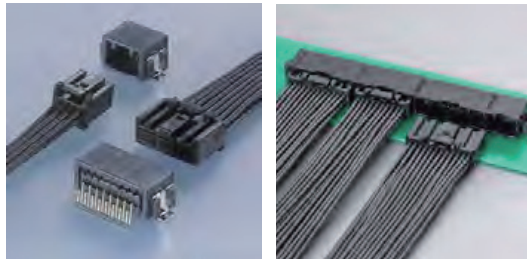


## For Safety System

Safety System Squib




## For Wire Harness Inline


Wire-to-wire Non-Waterproof

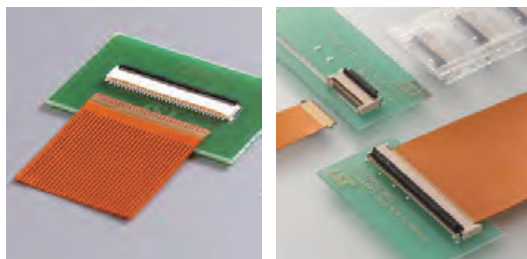

Wire-to-wire Waterproof

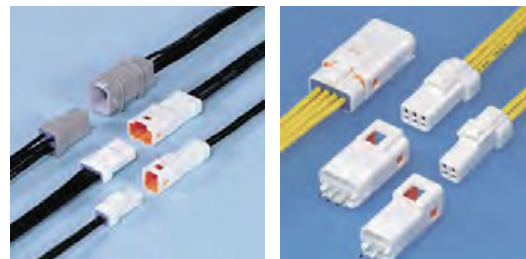

# Pogo Magnet

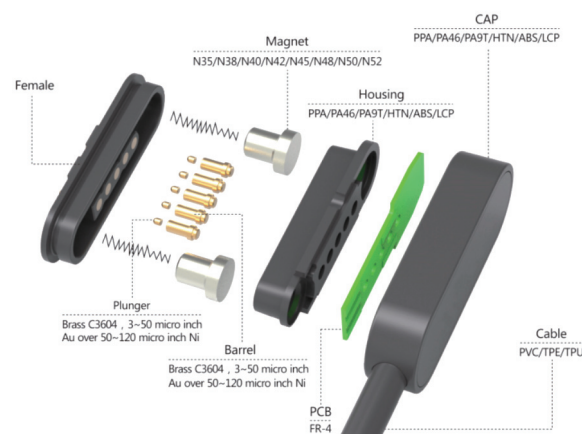

## 3.0V lithium coin cell CR series

Prodcuts Model	CR2450	CR2430	CR2032
Nominal voltage	3.0V	3.0V	3.0V
Nominal capacity	600mah	290mah	230mah
Dimensions	24.5*5.0mm	24.5*3.0mm	20.0*3.2mm





## 3.6V Lithium ion coin cell LIR series



Prodcuts Model	LIR1220	LIR1254	LIR2450
Nominal voltage	3.6V	3.6V	3.6V
Nominal capacity	10mah	60mAh	130mAh
Dimensions	12.5*2.0mm	12.5*5.4mm	24.5*5.0mm




Battery structure

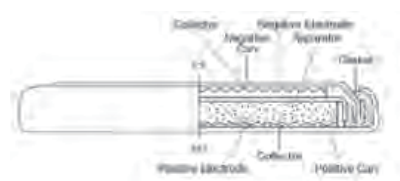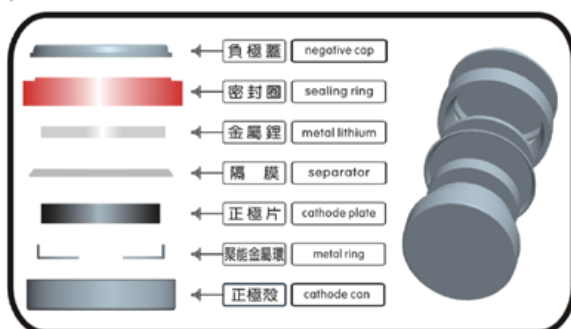

## Li-Polymer Battery




## 제품



Connector



POGO Magnet




Harness



Adapter




LED



Flame Detector



Recharge Coin



Battery

## Line-up



JST R&D Center



ACES Electronics Co., Ltd.



Greenconn Corporation



Y.lin



LIDEV



SinoTech Co., Ltd.