

JST Automotive

○ For Electric Control Unit

Board-to-Wire Non-Waterproof





○ For Safety System

Safety System Squib



○ For Wire Harness Inline

Wire-to-wire Non-Waterproof



Wire-to-wire Waterproof



Pogo Magnet



XKP-3PIN




ZHLC-4PIN



ZL-5PIN



BEAD-5PIN

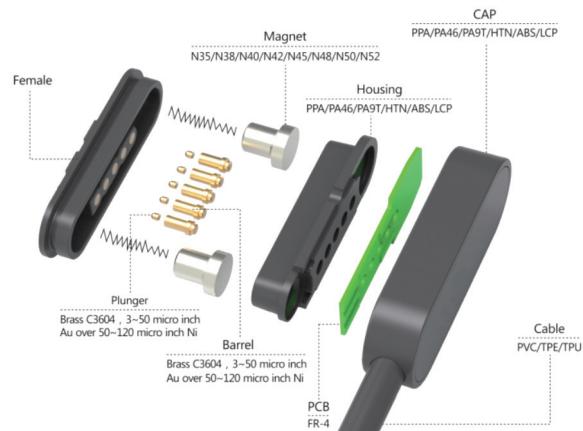

3.0V lithium coin cell CR series

Products Model	CR2450	CR2430	CR2032
Nominal voltage	3.0V	3.0V	3.0V
Nominal capacity	600mah	290mah	230mah
Dimensions	24.5*5.0mm	24.5*3.0mm	20.0*3.2mm





3.6V Lithium ion coin cell LIR series

Products Model	LIR1220	LIR1254	LIR2450
Nominal voltage	3.6V	3.6V	3.6V
Nominal capacity	10mah	60mAh	130mAh
Dimensions	12.5*2.0mm	12.5*5.4mm	24.5*5.0mm




Battery structure

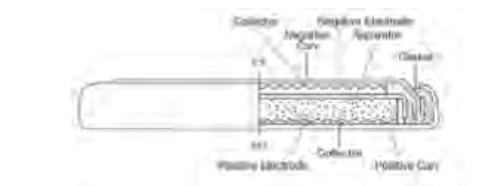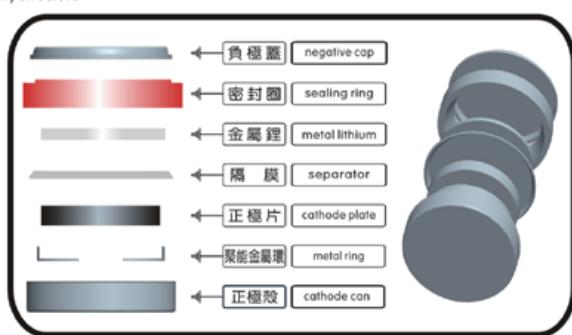

Li-Polymer Battery



제품



Connector



POGO Magnet




Harness



Adapter




LED



Flame Detector



Recharge Coin



Battery

Line-up



JST R&D Center



ACES Electronics Co., Ltd.



Greenconn Corporation



Y.lin



LIDEV



SinoTech Co., Ltd.



3M Interconnect solution



TE Connectivity



Japan Aviation Electronics