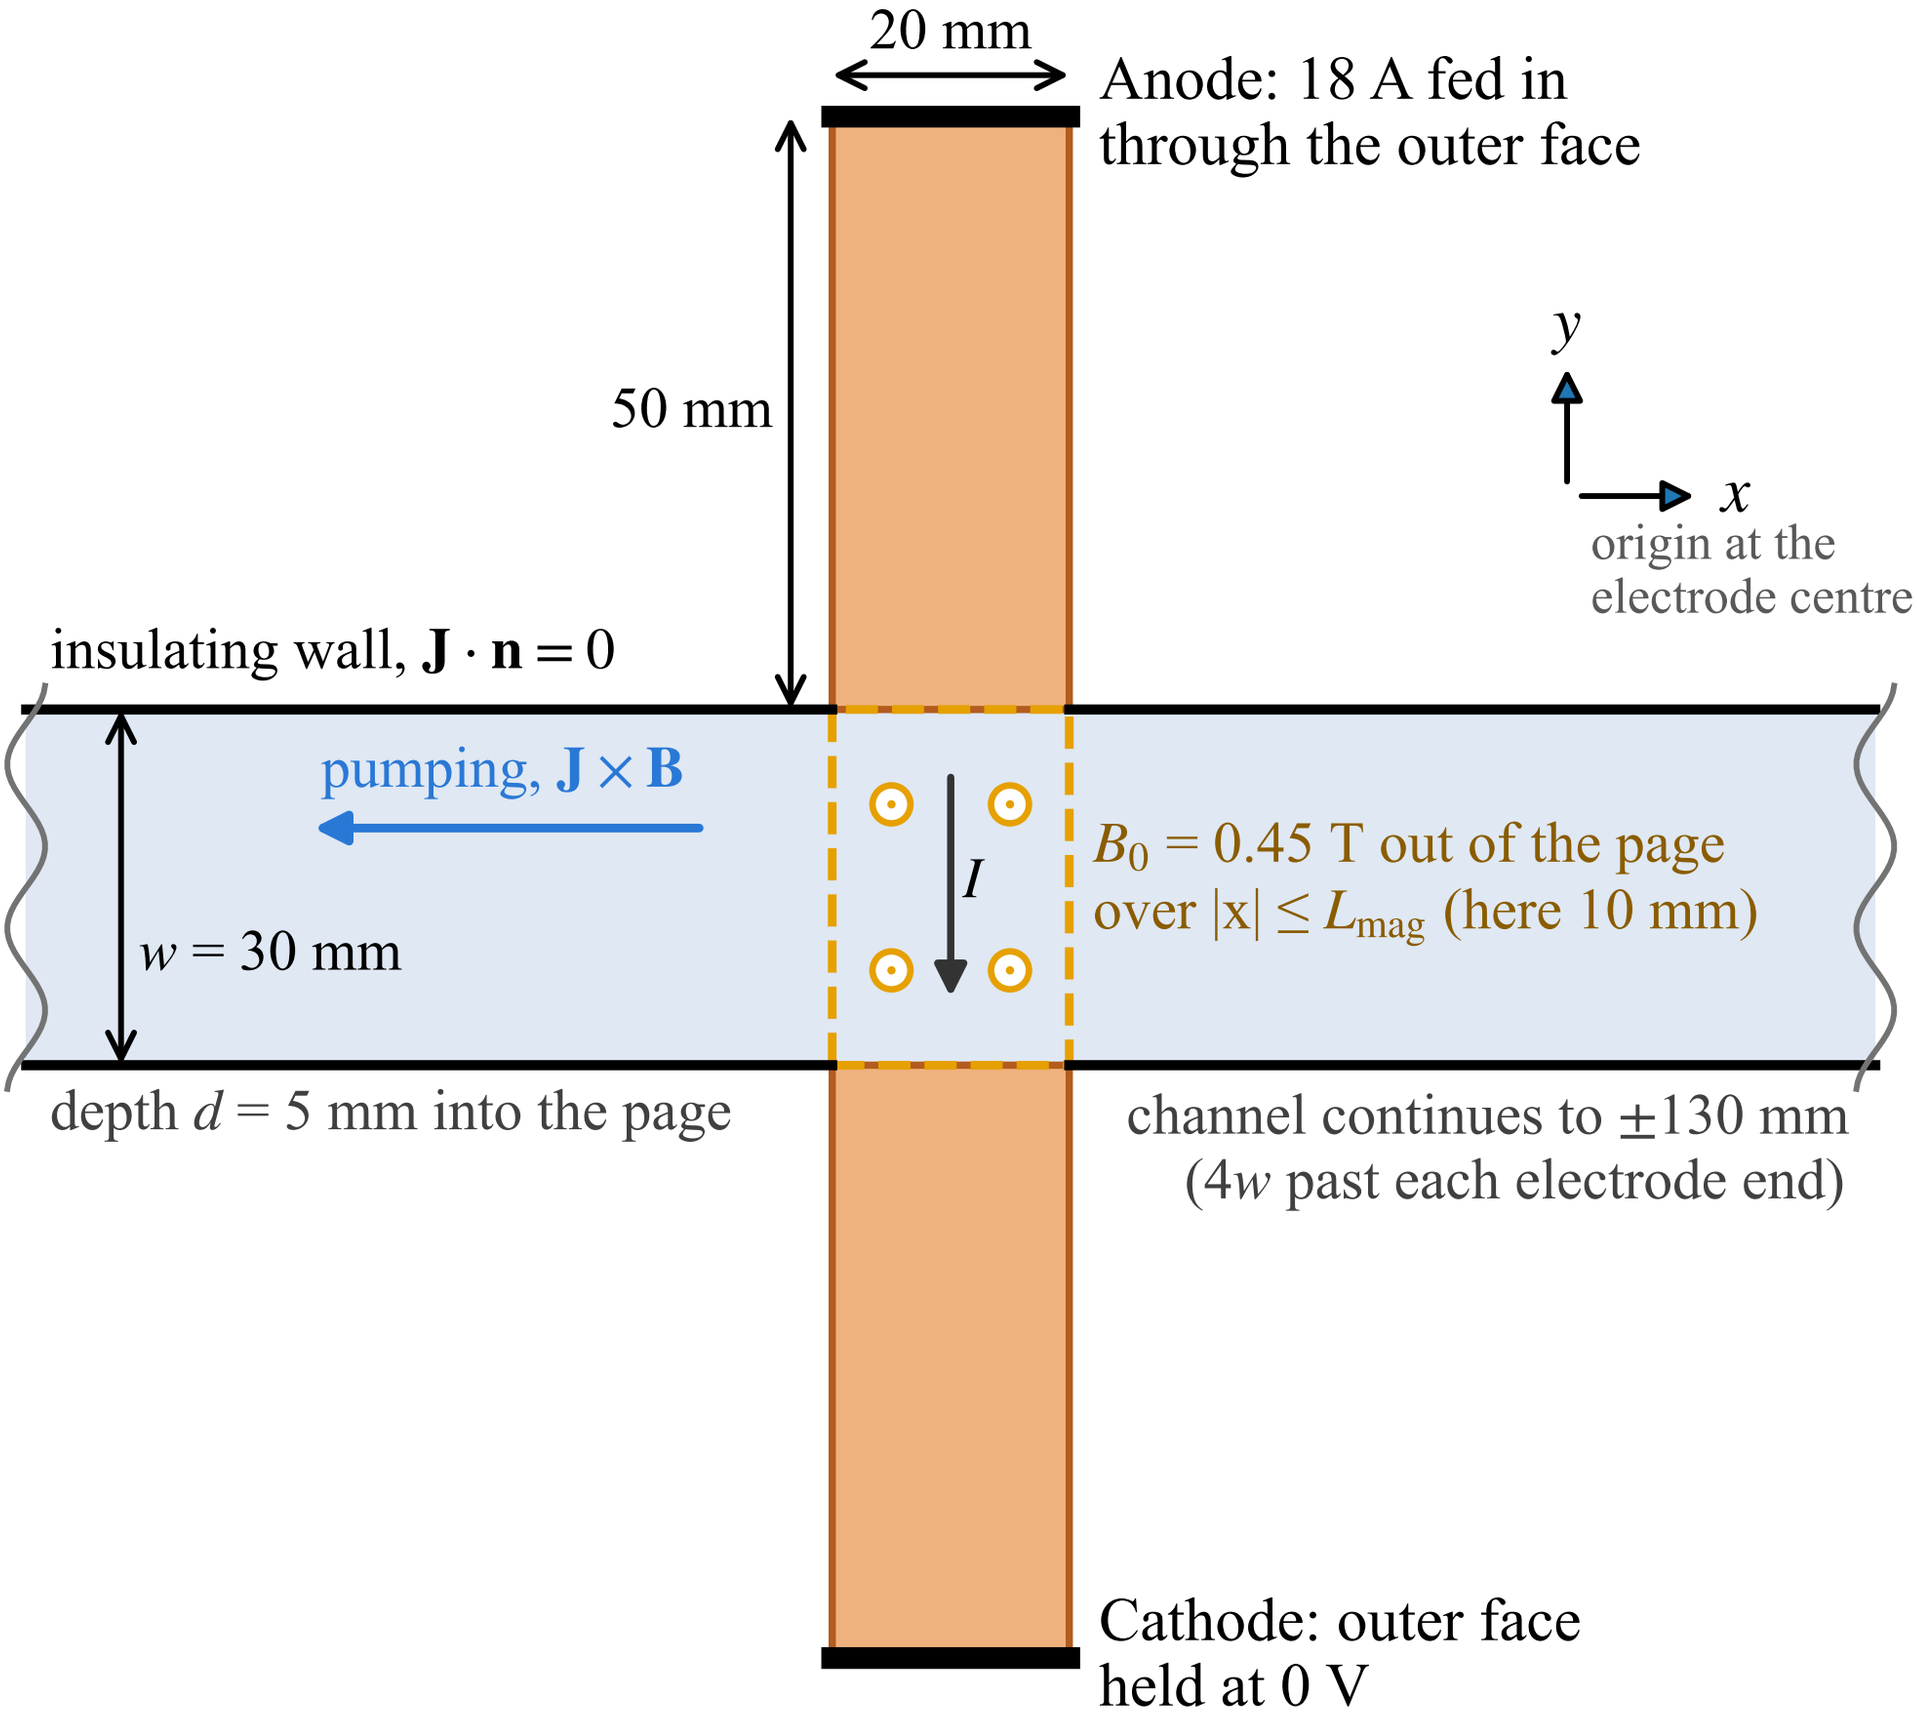
20 mm
Anode: 18 A fed in
through the outer face
50 mm
y
x
origin at the
electrode centre
insulating wall, $\mathbf{J} \cdot \mathbf{n} = 0$
pumping, $\mathbf{J} \times \mathbf{B}$
w = 30 mm
I
B_0 = 0.45 T out of the page
over $|x| \le L_{mag}$ (here 10 mm)
depth d = 5 mm into the page
channel continues to ±130 mm
(4w past each electrode end)
Cathode: outer face
held at 0 V