


1 THE ARROW, MARKED ON SENSOR EXTERIOR INDICATES
NORMAL FLOW DIRECTION. THE TRANSMITTER CAN BE CONFIGURED
FOR NORMAL (FORWARD), REVERSED OR BI-DIRECTIONAL FLOW.



F O R I N F O R M A T I O N O N L Y

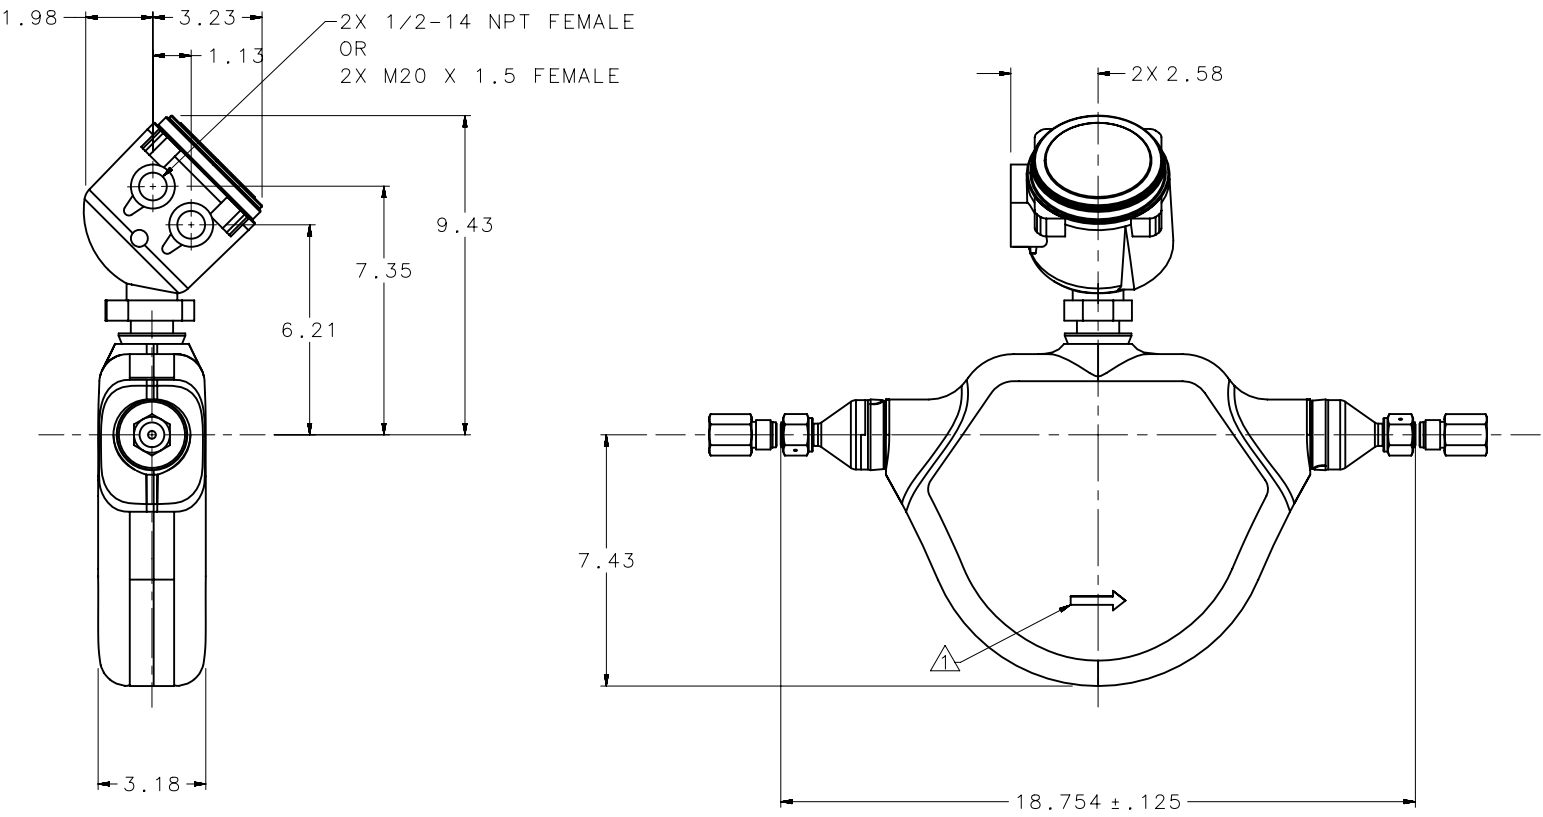

MODEL:
CMFS040MB67N2BAEKZZ

MICRO MOTION DIMENSIONAL DRAWING

For more information obtain a Product Data Sheet or Installation Manual at www.emersonprocess.com

DRAWN BY: PRG

REV:

DATE: JULY 18, 2018

DIMENSIONS ARE IN ENGLISH

DO NOT SCALE DRAWING

MATERIALS (WHERE APPLICABLE):

1/2 INCH NPT, NO. 8 VCR WITH SS GASKET

SENSOR: 316L/CF-3M STAINLESS STEEL; SENSOR CASE: 300-SERIES STAINLESS STEEL

ENCLOSURE: ENHANCED CORE, POLYURETHANE PAINTED ALUMINUM

ALLOWS FULL 360° ROTATION IN 45° INCREMENTS TO ORIENT WIRING CONDUIT OPENING

WEIGHT: 18 LBF

ADDITIONAL NOTES: