

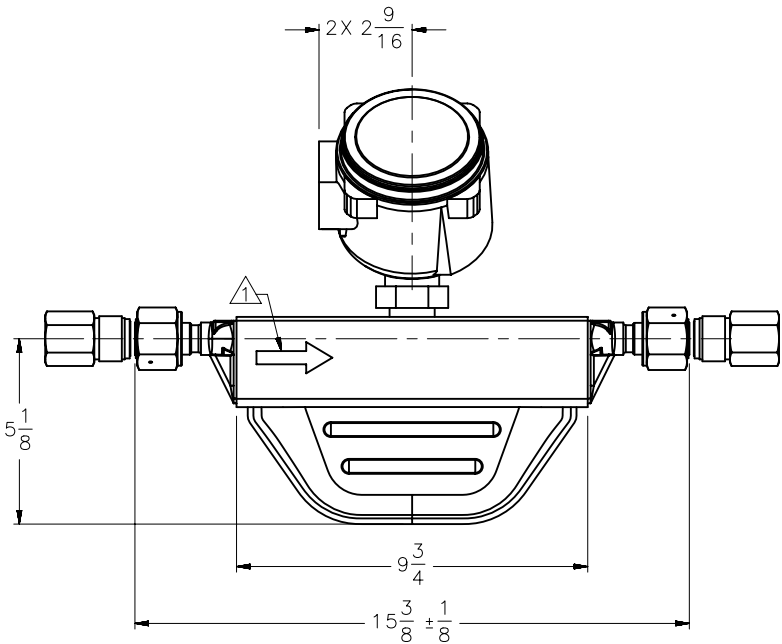


⚠ THE ARROW, MARKED ON SENSOR EXTERIOR INDICATES NORMAL FLOW DIRECTION. THE TRANSMITTER CAN BE CONFIGURED FOR NORMAL (FORWARD), REVERSED OR BI-DIRECTIONAL FLOW.

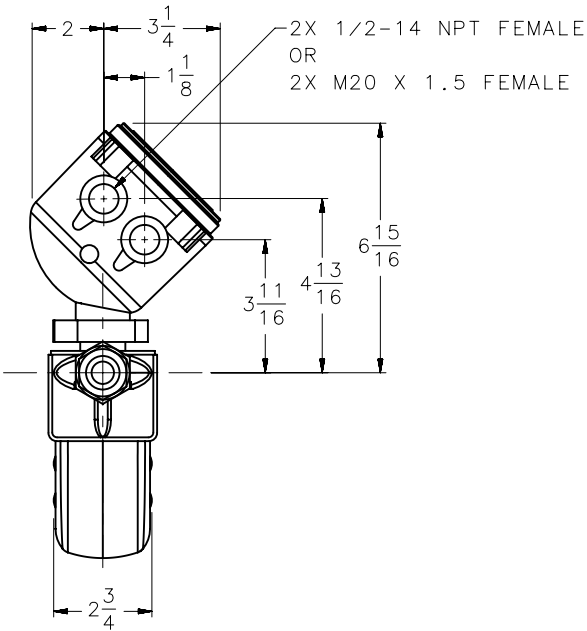

F O R I N F O R M A T I O N O N L Y

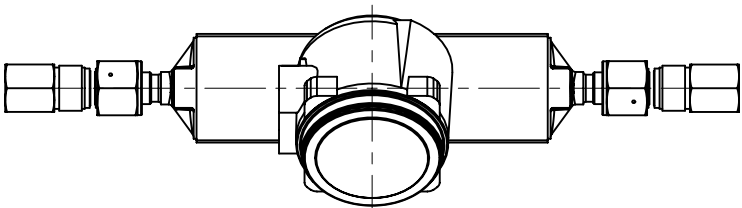

MODEL:
F025SB78C2BAEZAZZ

DRAWN BY: PRG
REV:
DATE: JULY 18, 2018
DIMENSIONS ARE IN
ENGLISH
DO NOT SCALE DRAWING

MATERIALS (WHERE APPLICABLE):
FTG: 3/4 INCH NPT, NO. 12 VCR WITH SS GASKET
SENSOR: 316L / CF-3M STAINLESS STEEL; SENSOR CASE: 304L STAINLESS STEEL
ENCLOSURE: ENHANCED CORE, POLYURETHANE PAINTED ALUMINUM
ALLOWS FULL 360° ROTATION IN 45° INCREMENTS TO ORIENT WIRING CONDUIT OPENING
WEIGHT: 14 LBF

ADDITIONAL NOTES: