



Write directly connected routes

Assign the 1st IP for the Interface.

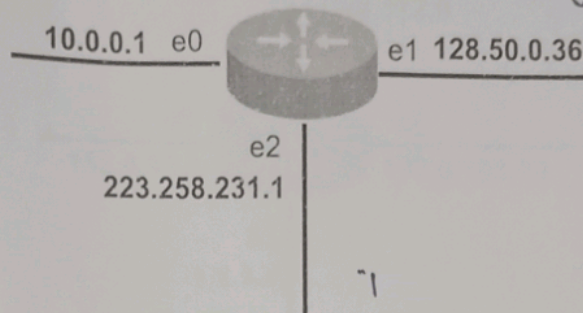


NETWORK	PREFIX	INTERFACE
10.0.0.0/8	8	e0
128.50.0.0/16	16	e1
223.258.231.0/24	24	e2

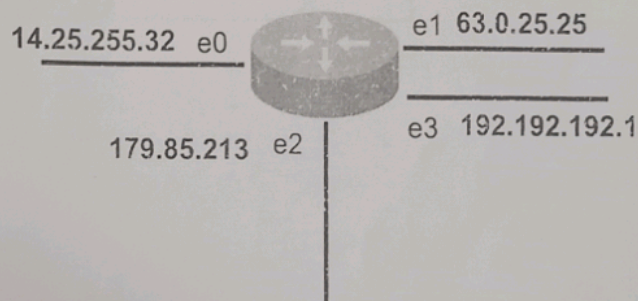

179.85.0.212

NETWORK	PREFIX	INTERFACE
14.0.0.0/8	8	e0
63.0.0.0/8	8	e1
179.85.213	not an valid IP	
192.192.192.0/24	24	e3

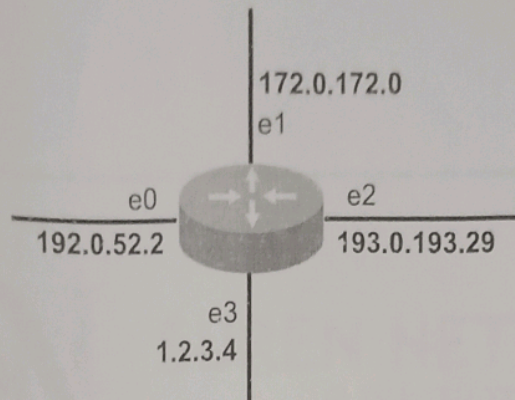

NETWORK	PREFIX	INTERFACE
192.0.52.0	24	e0
172.0.0.0	16	e1
193.0.193.0	24	e2
1.0.0.0	8	e3