


Server Service using Windows and Linux

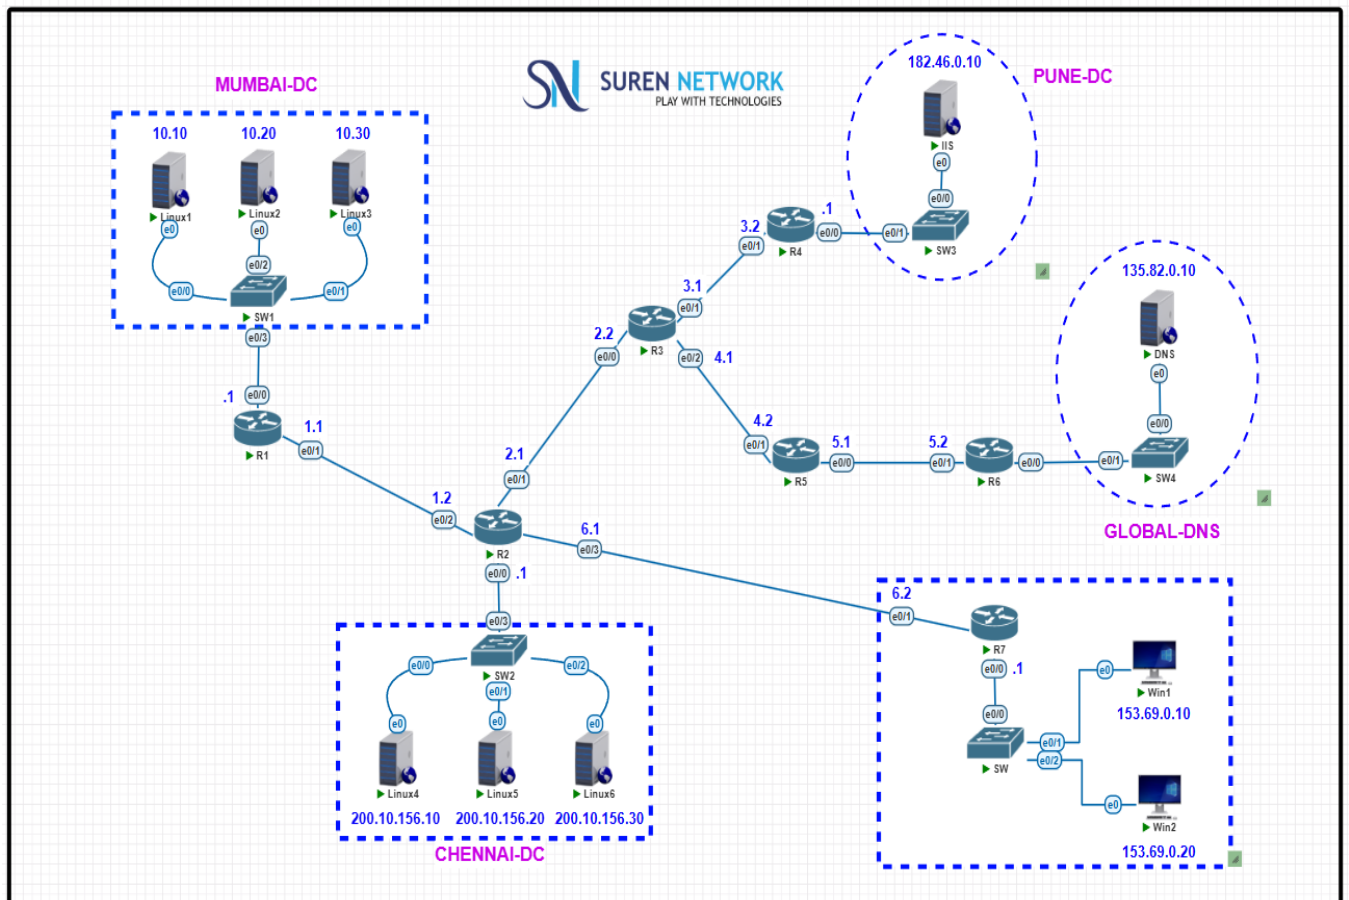

Router Configurations

```
R1
R1# ip int brief
interface
Ethernet0/0 10.0.0.1 YES manual up
Ethernet0/1 1.0.0.1 YES manual up
Ethernet0/2 unassigned YES TFTP up
Ethernet0/3 unassigned YES TFTP up
R1# ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - OSPF, EX - OSPF external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       Ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, I - IISIP
       * - application route
       % - next hop override, p - overrides from PIR
Gateway of last resort is not set

1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    1.0.0.0/8 is directly connected, Ethernet0/1
L    1.0.0.1/32 is directly connected, Ethernet0/1
S    2.0.0.0/8 [1/0] via 1.0.0.2
S    3.0.0.0/8 [1/0] via 1.0.0.2
S    4.0.0.0/8 [1/0] via 1.0.0.2
S    5.0.0.0/8 [1/0] via 1.0.0.2
S    6.0.0.0/8 [1/0] via 1.0.0.2
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
S    135.82.0.0/16 [1/0] via 1.0.0.2
S    153.69.0.0/16 [1/0] via 1.0.0.2
S    182.46.0.0/16 [1/0] via 1.0.0.2
S    200.10.156.0/24 [1/0] via 1.0.0.2
R1#
```

```
R2
R2#sh ip int brief
Interface IP-Address OK? Method Status Prot
GigabitEthernet0/0 200.10.156.1 YES manual up
GigabitEthernet0/1 2.0.0.1 YES manual up
GigabitEthernet0/2 1.0.0.2 YES manual up
GigabitEthernet0/3 6.0.0.1 YES manual up

R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
a - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 1.0.0.0/8 is directly connected, Ethernet0/2
L 1.0.0.2/32 is directly connected, Ethernet0/2
S 2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 2.0.0.0/8 is directly connected, Ethernet0/1
L 2.0.0.1/32 is directly connected, Ethernet0/1
S 3.0.0.0/8 [1/0] via 2.0.0.2
S 4.0.0.0/8 [1/0] via 2.0.0.2
S 5.0.0.0/8 [1/0] via 2.0.0.2
S 6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 6.0.0.0/8 is directly connected, Ethernet0/3
L 6.0.0.1/32 is directly connected, Ethernet0/3
S 10.0.0.0/8 [1/0] via 1.0.0.1
S 135.82.0.0/16 [1/0] via 2.0.0.2
S 153.49.0.0/16 [1/0] via 6.0.0.2
S 182.46.0.0/16 [1/0] via 2.0.0.2
S 200.10.156.0/24 is variably subnetted, 2 subnets, 2 masks
C 200.10.156.0/24 is directly connected, Ethernet0/0
L 200.10.156.1/32 is directly connected, Ethernet0/0
R2#
```

```
R3
R3#sh ip int brief
Interface IP-Address OK? Method Status Prot
GigabitEthernet0/0 2.0.0.2 YES manual up
GigabitEthernet0/1 3.0.0.1 YES manual up
GigabitEthernet0/2 4.0.0.1 YES manual up
GigabitEthernet0/3 unassigned YES TFTP up

R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
a - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 2.0.0.1
S 2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 2.0.0.0/8 is directly connected, Ethernet0/0
L 2.0.0.2/32 is directly connected, Ethernet0/0
S 3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 3.0.0.0/8 is directly connected, Ethernet0/1
L 3.0.0.1/32 is directly connected, Ethernet0/1
S 4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 4.0.0.0/8 is directly connected, Ethernet0/2
L 4.0.0.1/32 is directly connected, Ethernet0/2
S 5.0.0.0/8 [1/0] via 4.0.0.2
S 6.0.0.0/8 [1/0] via 2.0.0.1
S 10.0.0.0/8 [1/0] via 2.0.0.1
S 135.82.0.0/16 [1/0] via 4.0.0.2
S 153.49.0.0/16 [1/0] via 2.0.0.1
S 182.46.0.0/16 [1/0] via 3.0.0.2
S 200.10.156.0/24 [1/0] via 2.0.0.1
R3#
```

```
R4
R4#sh ip int brief
Interface IP-Address OK? Method Status Prot
GigabitEthernet0/0 182.46.0.1 YES manual up
GigabitEthernet0/1 3.0.0.2 YES manual up
GigabitEthernet0/2 unassigned YES TFTP up
GigabitEthernet0/3 unassigned YES TFTP up

R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
a - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 3.0.0.1
S 2.0.0.0/8 [1/0] via 3.0.0.1
S 3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 3.0.0.0/8 is directly connected, Ethernet0/1
L 3.0.0.2/32 is directly connected, Ethernet0/1
S 4.0.0.0/8 [1/0] via 3.0.0.1
S 5.0.0.0/8 [1/0] via 3.0.0.1
S 6.0.0.0/8 [1/0] via 3.0.0.1
S 10.0.0.0/8 [1/0] via 3.0.0.1
S 135.82.0.0/16 [1/0] via 3.0.0.1
S 153.49.0.0/16 [1/0] via 2.0.0.1
S 182.46.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 182.46.0.0/16 is directly connected, Ethernet0/0
L 182.46.0.1/32 is directly connected, Ethernet0/0
S 200.10.156.0/24 [1/0] via 3.0.0.1
R4#
```

```
R5
R5#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
       a - application route
       + - replicated route, % - next hop override, p - overrides from FIR

Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 4.0.0.1
S 2.0.0.0/8 [1/0] via 4.0.0.1
S 3.0.0.0/8 [1/0] via 4.0.0.1
C 4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 4.0.0.2/32 is directly connected, Ethernet0/1
C 5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 5.0.0.0/8 is directly connected, Ethernet0/0
L 5.0.0.1/32 is directly connected, Ethernet0/0
S 6.0.0.0/8 [1/0] via 4.0.0.1
S 10.0.0.0/8 [1/0] via 4.0.0.1
S 135.82.0.0/16 [1/0] via 5.0.0.2
S 153.69.0.0/16 [1/0] via 4.0.0.1
S 182.46.0.0/16 [1/0] via 4.0.0.1
S 200.10.156.0/24 [1/0] via 4.0.0.1

R5#
R5#sh ip int brief
Interface IP-Address OK? Method Status Prot
Ethernet0/0 5.0.0.1 YES manual up up
Ethernet0/1 4.0.0.2 YES manual up up
Ethernet0/2 unassigned YES TFTP up up
Ethernet0/3 unassigned YES TFTP up up

R5#
```

```
R6
R6#sh ip int brief
Interface IP-Address OK? Method Status Prot
Ethernet0/0 135.82.0.1 YES manual up up
Ethernet0/1 5.0.0.2 YES manual up up
Ethernet0/2 unassigned YES TFTP up up
Ethernet0/3 unassigned YES TFTP up up

R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
       a - application route
       + - replicated route, % - next hop override, p - overrides from FIR

Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 5.0.0.1
S 2.0.0.0/8 [1/0] via 5.0.0.1
S 3.0.0.0/8 [1/0] via 5.0.0.1
S 4.0.0.0/8 [1/0] via 5.0.0.1
C 5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 5.0.0.2/32 is directly connected, Ethernet0/1
C 6.0.0.0/8 [1/0] via 5.0.0.1
S 10.0.0.0/8 [1/0] via 5.0.0.1
S 135.82.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 135.82.0.0/16 is directly connected, Ethernet0/0
L 135.82.0.1/32 is directly connected, Ethernet0/0
S 153.69.0.0/16 [1/0] via 5.0.0.1
S 182.46.0.0/16 [1/0] via 5.0.0.1
S 200.10.156.0/24 [1/0] via 5.0.0.1

R6#
R6#
```




```
R7
R7(config)#
R7#
*Jul 25 13:20:46.712: %SYS-5-CONFIG_I: Configured from console by console
R7#sh ip int brief
Interface IP-Address OK? Method Status Prot
Ethernet0/0 153.69.0.1 YES manual up up
Ethernet0/1 6.0.0.2 YES manual up up
Ethernet0/2 unassigned YES TFTP up up
Ethernet0/3 unassigned YES TFTP up up

R7#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, I - ISIS
       a - application route
       + - replicated route, % - next hop override, p - overrides from FIR


Gateway of last resort is not set

S 1.0.0.0/8 [1/0] via 6.0.0.1
S 2.0.0.0/8 [1/0] via 6.0.0.1
S 3.0.0.0/8 [1/0] via 6.0.0.1
S 4.0.0.0/8 [1/0] via 6.0.0.1
S 5.0.0.0/8 [1/0] via 6.0.0.1
C 6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 6.0.0.2/32 is directly connected, Ethernet0/1
S 10.0.0.0/8 [1/0] via 6.0.0.1
S 135.82.0.0/16 [1/0] via 6.0.0.1
S 153.69.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 153.69.0.0/16 is directly connected, Ethernet0/0
L 153.69.0.1/32 is directly connected, Ethernet0/0
S 182.46.0.0/16 [1/0] via 6.0.0.1
S 200.10.156.0/24 [1/0] via 6.0.0.1



R7#
```

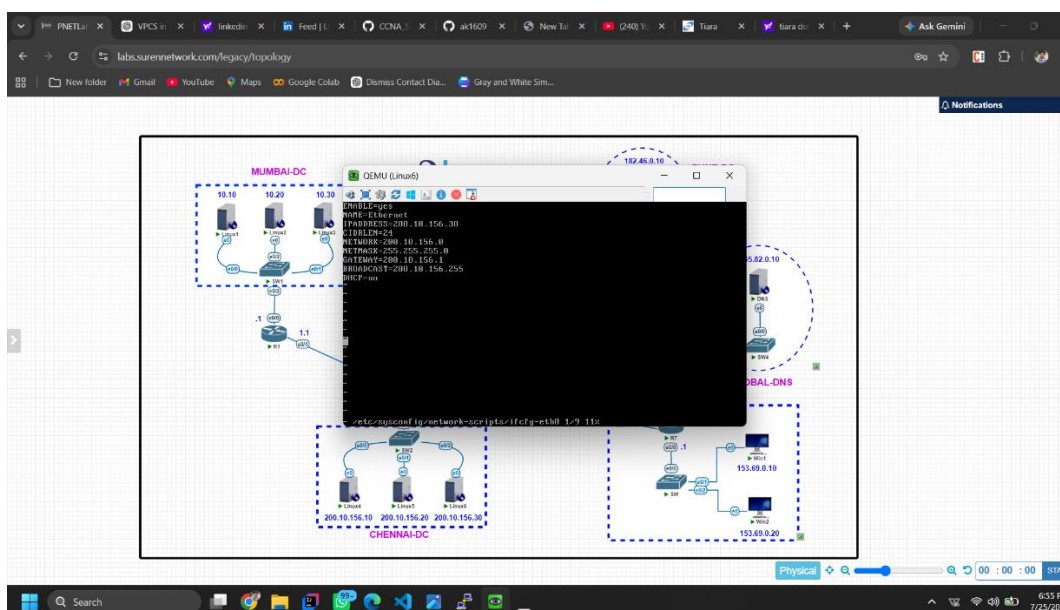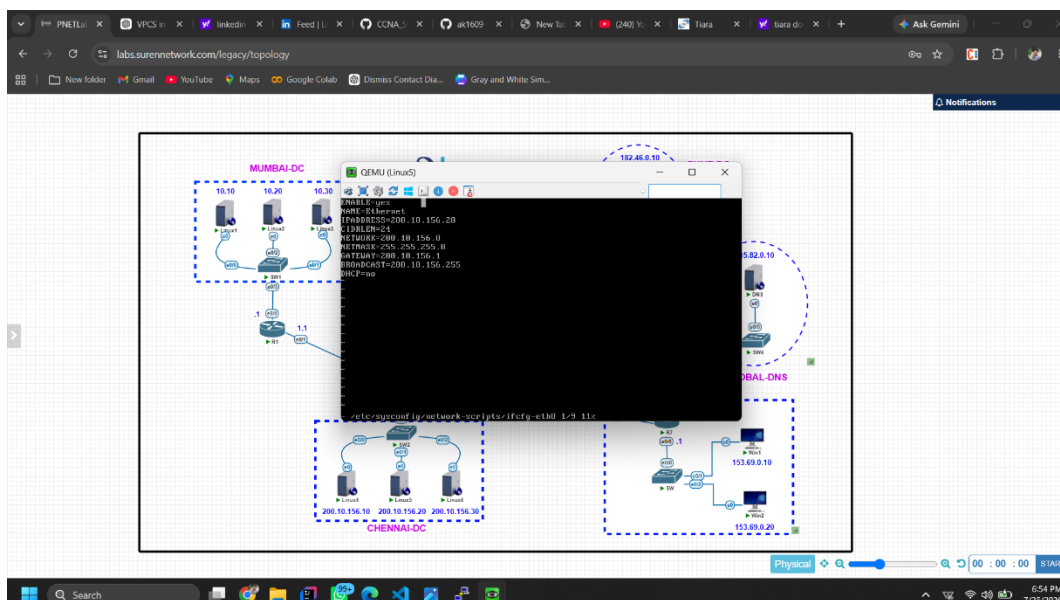
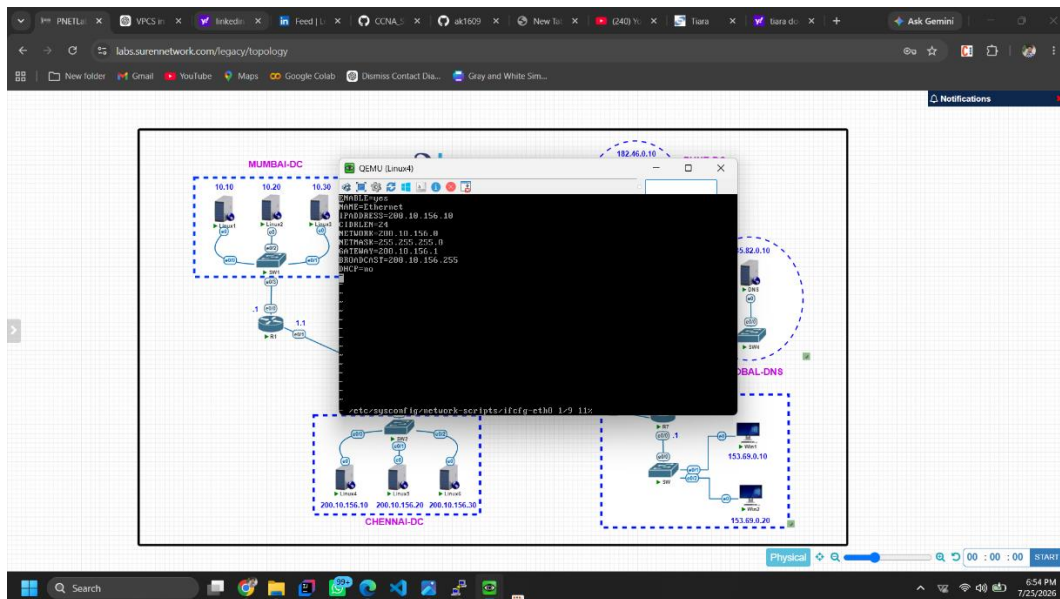
Windows Server Configurations

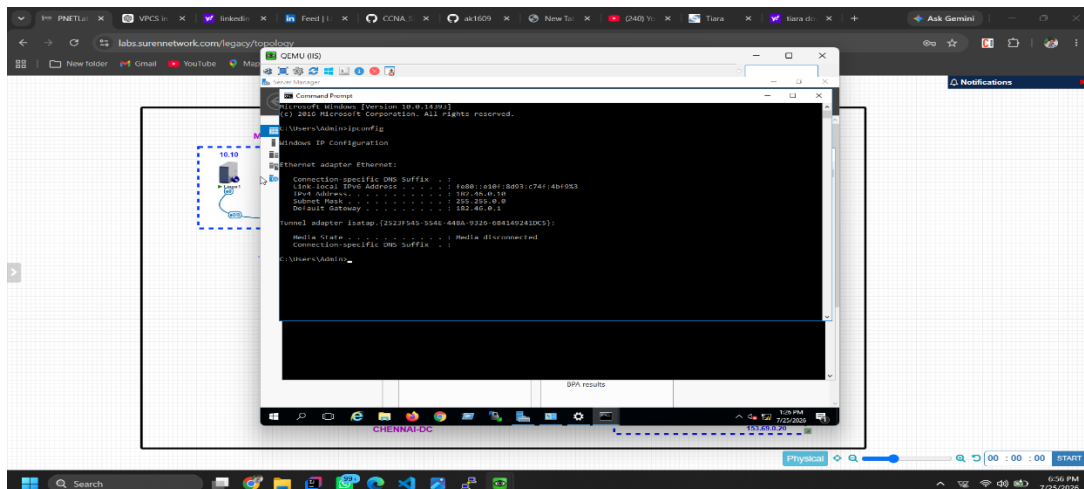




DNS Configurations

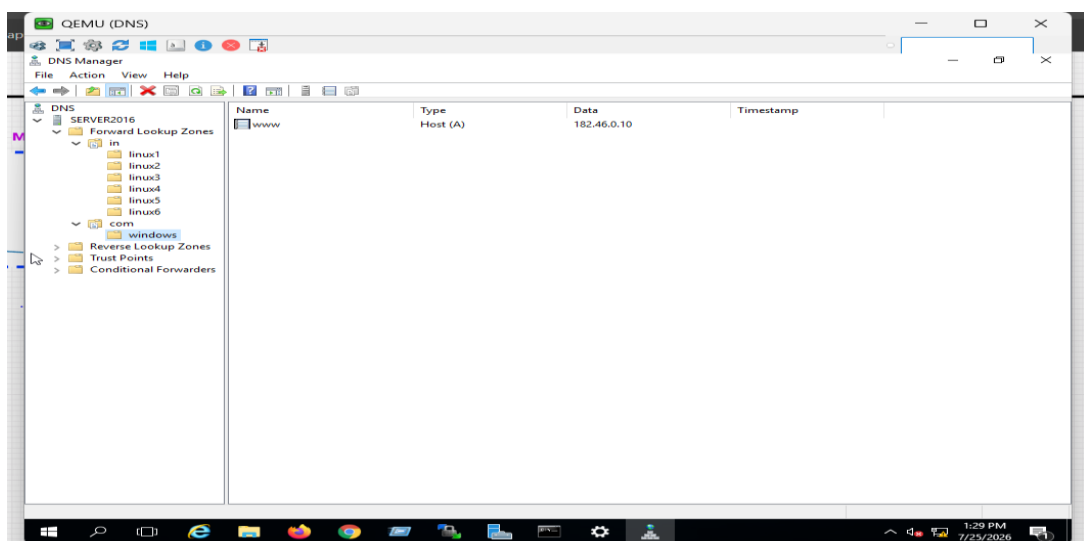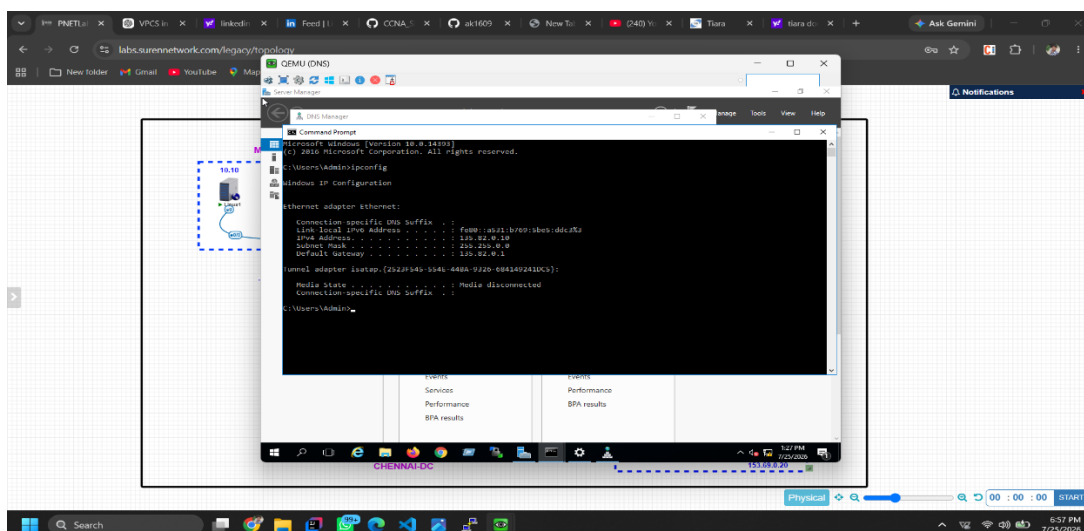

Client Machine Configurations

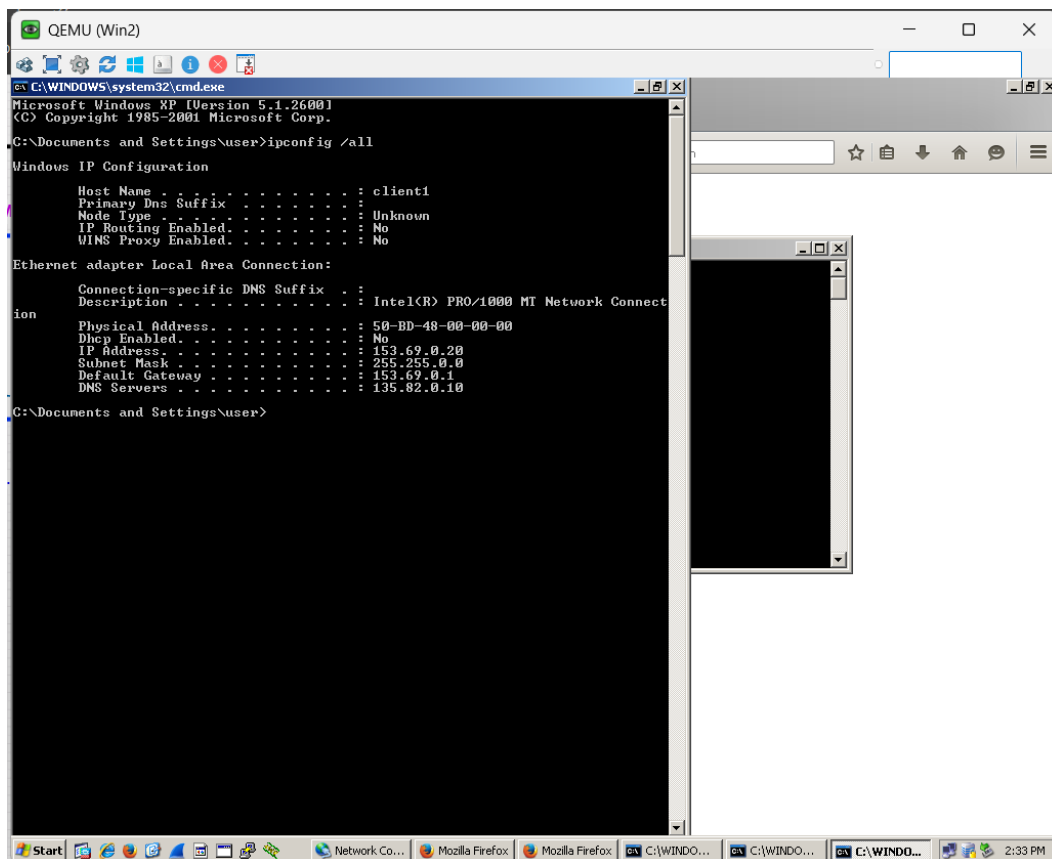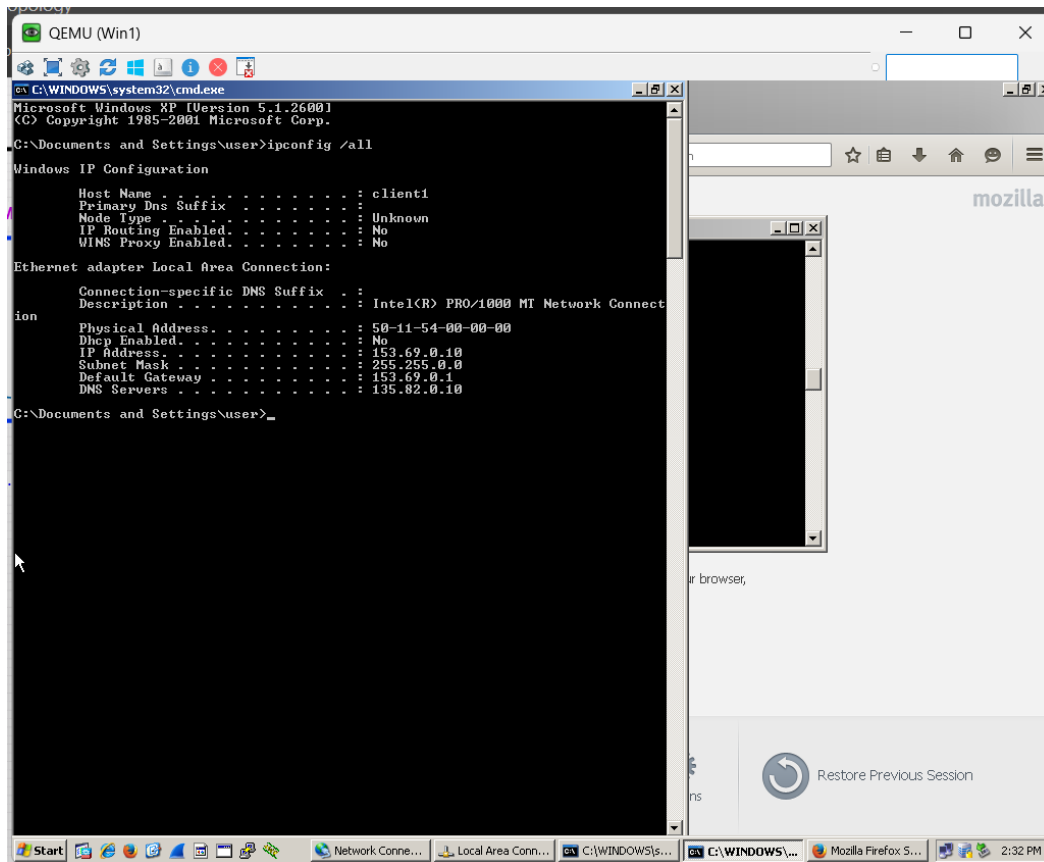

Browse Using the IP Address

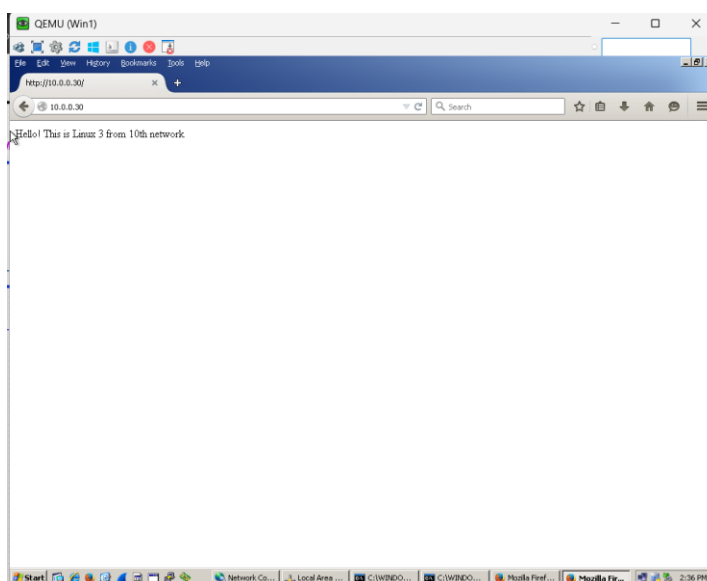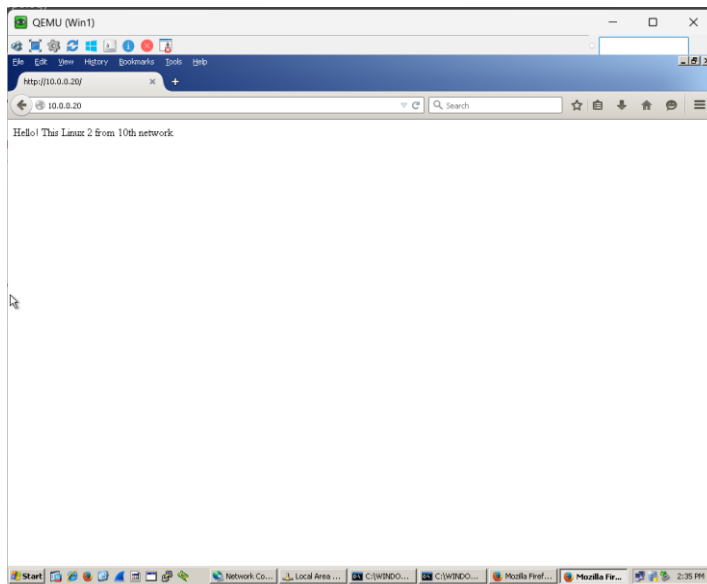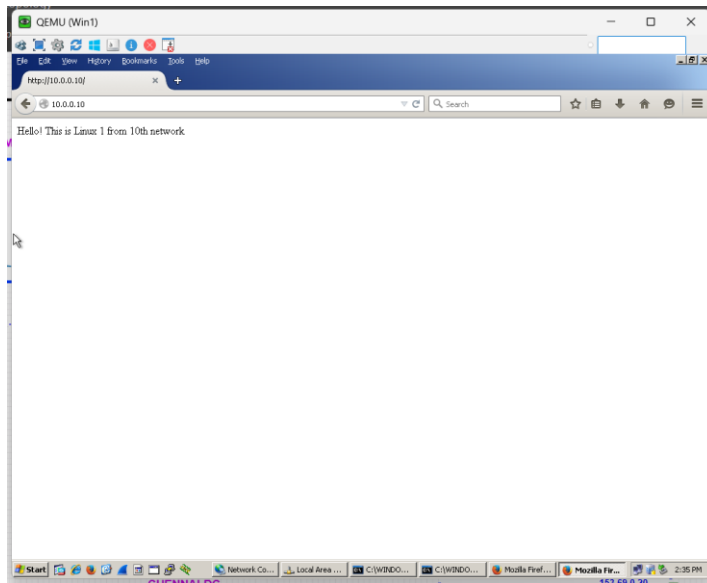

Browse Using the domain name

