


NUMBER	DATE	DESCRIPTION
	10/24/25	ISSUED FOR CONSTRUCTION

GENERAL LIGHTING NOTES:


- REFERS DRAWINGS FOR EGRESS, STANDEA AND INTERNAL NOTES.
- REFER TO DRAWING E-01 FOR SPECIFICATION OF LIGHTING CONTROL SYSTEMS.
- REFER TO ARCHITECTURAL LAYOUTS FOR COORDINATION OF WALL MOUNTED FIXTURE LOCATIONS.
4. REFER TO ARCHITECTURAL LAYOUTS FOR COORDINATION OF ALL SWITCHES SHAL BE COORDINATED WITH THE ARCHITECT, MECHANICAL EQUIPMENT, OTHER CONTRACTORS AND COORDINATE OPERATION OF ALL SWITCHES PRIOR TO PURCHASE OF LIGHTING FIXTURES.
5. REFER TO ARCHITECTURAL LAYOUTS FOR COORDINATION OF ALL SWITCHES SHAL BE COORDINATED WITH THE ARCHITECT, MECHANICAL EQUIPMENT, OTHER CONTRACTORS AND COORDINATE OPERATION OF ALL SWITCHES PRIOR TO PURCHASE OF LIGHTING FIXTURES.
6. THE ELECTRICAL CONTRACTOR SHALL FURNISH AND INSTALL ALL LIGHTING FIXTURES COMPLETE WITH WIRING.
7. THE ELECTRICAL CONTRACTOR SHALL FURNISH AND INSTALL ALL LIGHTING FIXTURES COMPLETE WITH WIRING.
8. THE ELECTRICAL CONTRACTOR SHALL FURNISH AND INSTALL ALL LIGHTING FIXTURES COMPLETE WITH WIRING.
9. THE ELECTRICAL CONTRACTOR SHALL FURNISH AND INSTALL ALL LIGHTING FIXTURES COMPLETE WITH WIRING.
10. ALL LIGHTING FIXTURES SHALL BE CONNECTED TO THE EMERGENCY GENERATOR.
11. EMERGENCY LIGHTING FIXTURES SHALL BE PROVIDED THROUGHOUT THE BUILDING TO MAINTAIN AN EGRESS CORRIDORS, DRESSERS, ETC. BRANCH BYPASS RELEASERS, EMERGENCY BRANCH CIRCUIT CONDUCTORS SHALL FUNCTION AS NORMAL IN EACH SPACE PROVIDED UNLESS OTHERWISE INDICATED.
12. UNDER NORMAL CONDITIONS, EMERGENCY BRANCH CIRCUIT CONDUCTORS SHALL FUNCTION AS NORMAL IN EACH SPACE PROVIDED UNLESS OTHERWISE INDICATED.
13. UNDER EMERGENCY CONDITIONS, ALL THE NORMAL LIGHTING IN EACH SPACE PROVIDED UNLESS OTHERWISE INDICATED.
14. ALL LIGHTING FIXTURES SHALL BE COORDINATED WITH THE ELECTRICAL CONTRACTOR.
15. NO CONFLICTS WITH THE EQUIPMENT AND/OR PLUMBING LOCATIONS SHALL BE COORDINATED WITH THE RESPONDING TRADES.
16. FOR ELECTRICAL PANEL LOCATIONS REFER TO RESPECTIVE POWER LOGIC PLAN.
17. EXIT SIGN DIRECTIONAL ARROWS SHALL BE AS INDICATED ON THE ELECTRICAL PLANS AND SHALL BE COORDINATED WITH THE ARCHITECTURAL PLANS AND REFLECTED CEILING PLANS.

KEYED NOTES:

- ① REFER TO DRAWINGS 10/24/25
STAIRWAY AS-TYPICAL
- ② REFER TO DRAWING E-01 FOR SPECIFICATION OF PUBLIC SPACE LIGHTING
- ③ FOR PARKING PURPOSES ASSUME THAT EACH UNIQUE
FAUCET TYPE WITHIN A SPACE SHALL HAVE A
DEDICATED CONTROL ZONE, UNLESS OTHERWISE
NOTED. PLUS ADDITIONAL ZONES FOR PRIMARY AND
SECONDARY DAYLIGHT ZONES.
- ④ ASSUME EGGSHELL LIGHTING WITH BYPASS RELAYS FOR
ALL LIGHTING IN THE PATH OF EXPRESS

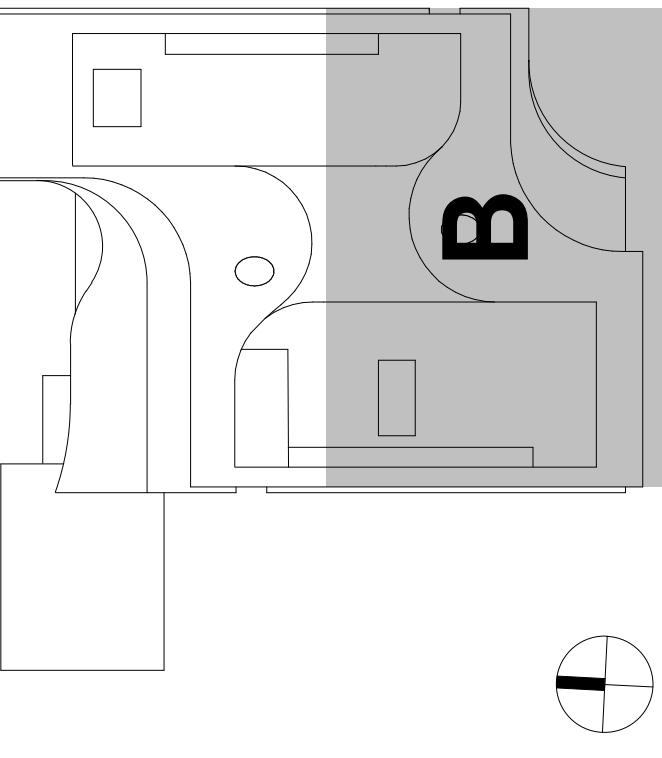

KEY PLAN

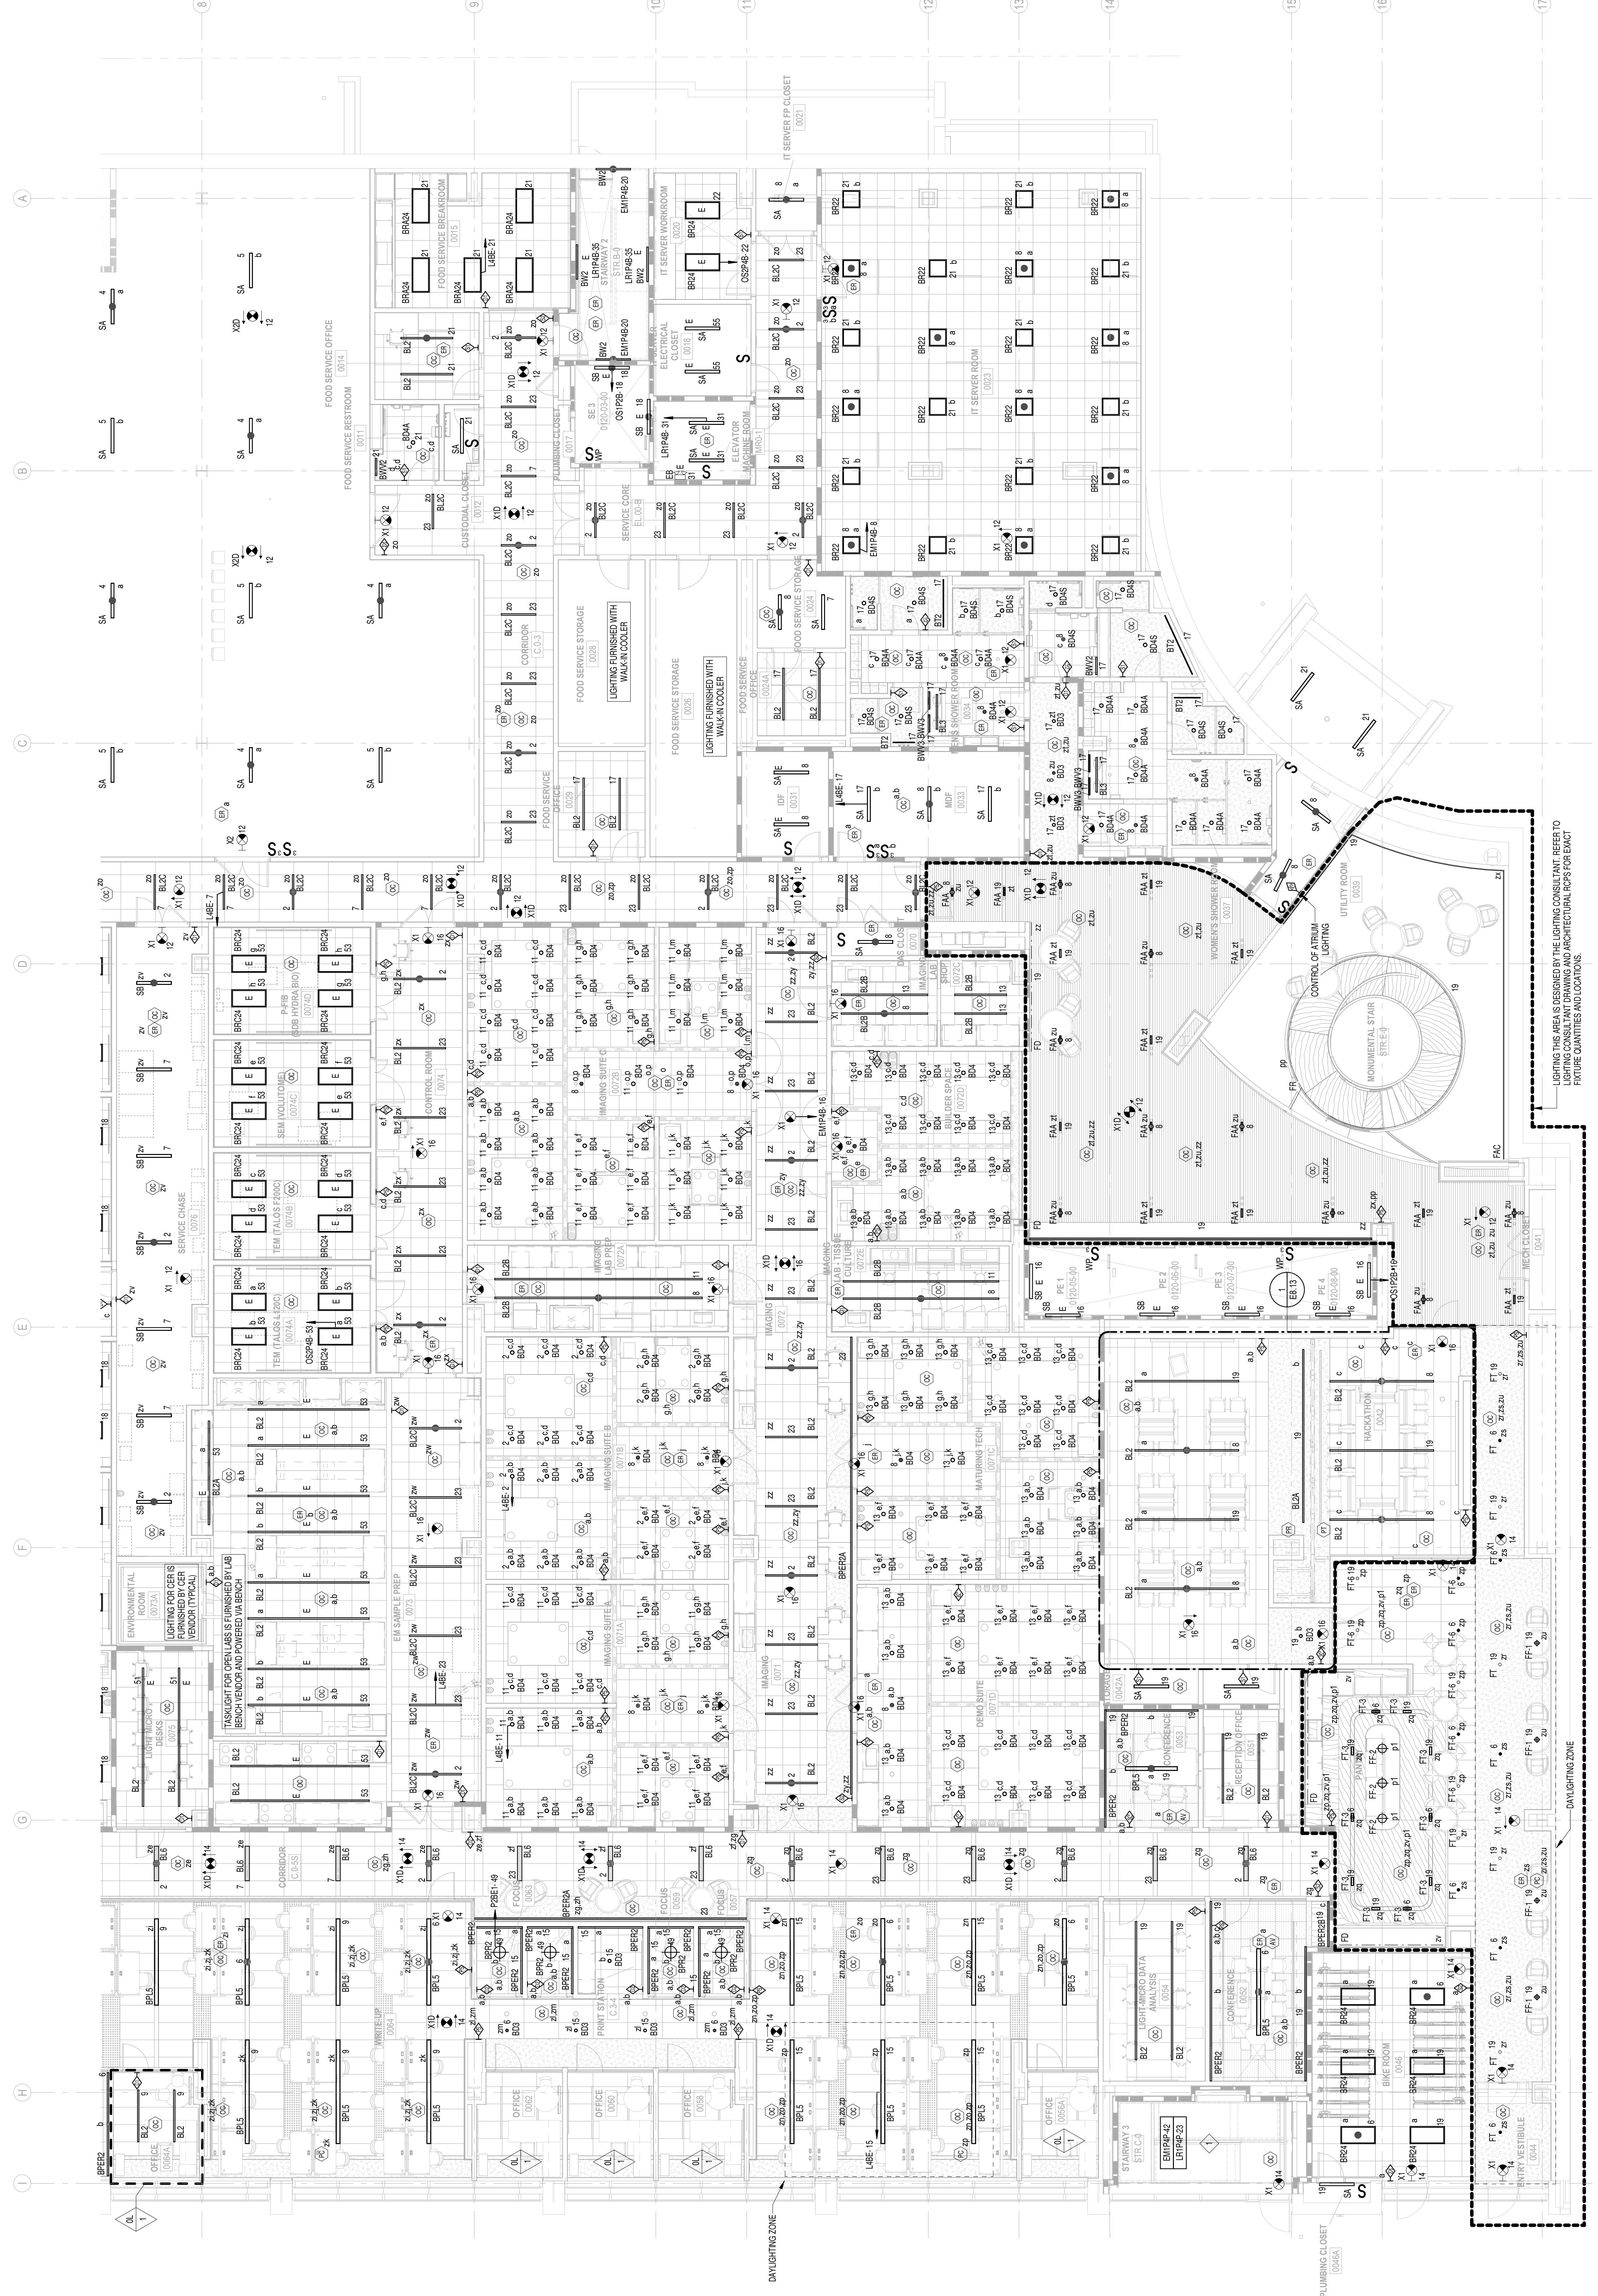

1 1/8" = 1'-0"

1 1/8" = 1'-0"

JOHNS HOPKINS

UNIVERSITY

LIFE SCIENCES BUILDING

600 N Broadway

Baltimore, MD 21205

1800 Orleans St

Baltimore, Maryland 21287

OCTOBER 24, 2025

Scale: 1/8" = 1'-0"

Drawn By:

Designed By:

Proj. No.:

Poject Job No.:

17480.00

Card File:

Client Deg. No.:

J-170-24.000

Client Deg. No.:

EL2.00B



Professional certification,
certified that these documents were prepared or
engineered by the person whose signature appears
herein and that they conform to the laws of the State of Maryland.

Seal

Date: OCTOBER 24, 2025

Drawn By:

Designed By:

Proj. No.:

Poject Job No.:

17480.00

Card File:

Client Deg. No.:

EL2.00B