


Operator
Telephone
Fax
e-Mail

Vinny (Office Lighting) / Summary

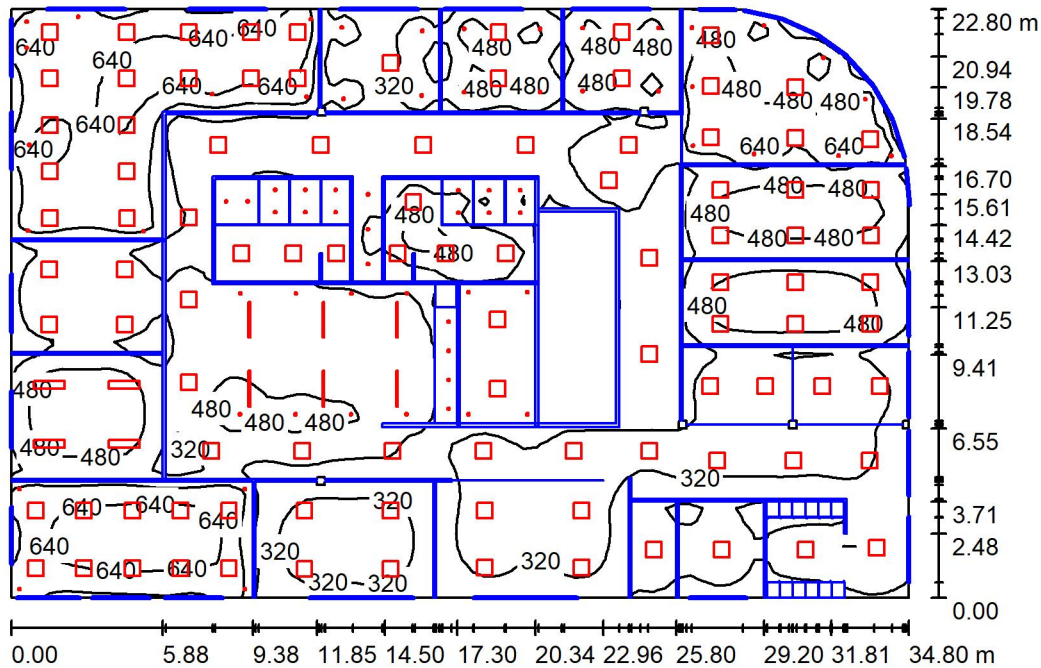

Height of Room: 3.300 m, Light loss factor: 0.85

Values in Lux, Scale 1:293

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0
Workplane	/	403	40	817	0.099
Floor	20	328	10	658	0.031
Ceilings (11)	70	62	0.00	369	/
Walls (19)	50	180	4.84	733	/

Workplane:

Height: 0.700 m
Grid: 70 x 46 Points
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: - , Ceiling / Working Plane: - .

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	98	ETAP - U23I2R1/NMD (_LTRRevAA) (1.000)	4200	4200	33.5
2	4	ETAP - U2B-M110-MI-840-055D (_LTRRevAB) (1.000)	5500	5500	38.5
3	15	ETAP FLARE-12/LEDN5S _LTRRevAB (1.000)	590	590	5.6
4	21	ETAP FLARE-12/LEDN6D _LTRRevAB (1.000)	780	780	7.5
5	19	ETAP FLARE-12/LEDW10D _LTRRevAB (1.000)	1250	1250	12.0
6	12	ETAP FLARE-12/LEDW5S _LTRRevAB (1.000)	560	560	5.6



Operator
Telephone
Fax
e-Mail

Vinny (Office Lighting) / Summary

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
7	6	ETAP V3RB10M/W3M0D0X0 _LTRevAB (1.000)	2700	2700	23.3
Total:			505500	Total: 505500	4113.5

Specific connected load: $5.26 \text{ W/m}^2 = 1.30 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 781.96 m^2)