


Operator
Telephone
Fax
e-Mail

Vinny (Office Lighting) / Summary

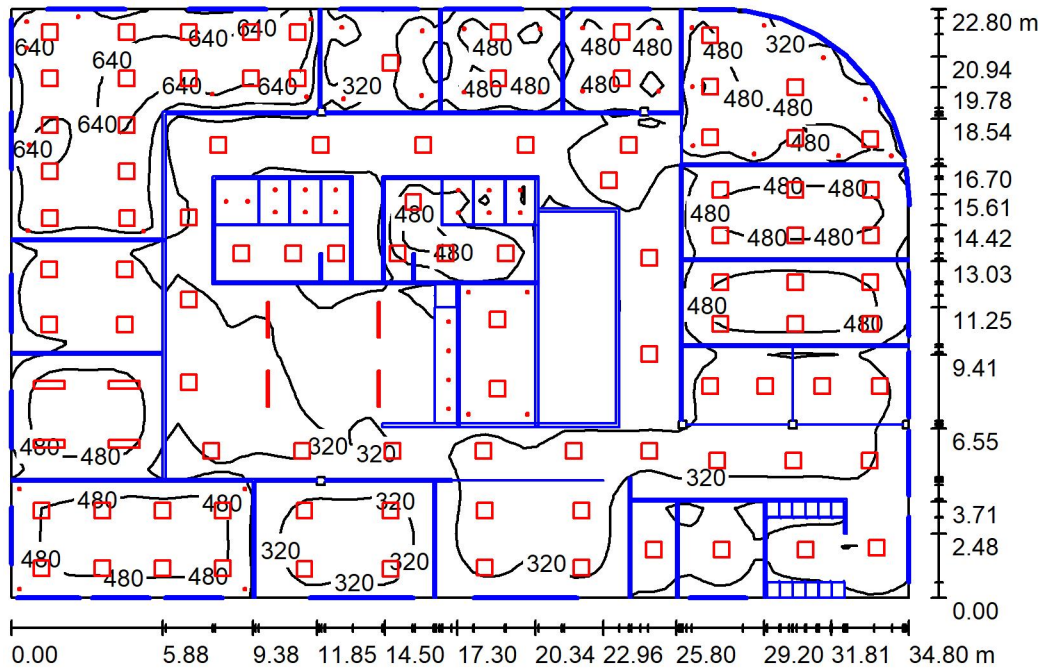

Height of Room: 3.300 m, Light loss factor: 0.85

Values in Lux, Scale 1:293

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0
Workplane	/	382	19	817	0.050
Floor	20	310	10	657	0.033
Ceilings (11)	70	59	0.00	365	/
Walls (19)	50	172	4.86	732	/

Workplane:

Height: 0.700 m
Grid: 70 x 46 Points
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: - , Ceiling / Working Plane: - .

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	96	ETAP - U23I2R1/NMD (_LTRRevAA) (1.000)	4200	4200	33.5
2	4	ETAP - U2B-M110-MI-840-055D (_LTRRevAB) (1.000)	5500	5500	38.5
3	16	ETAP FLARE-12/LEDN5S _LTRRevAB (1.000)	590	590	5.6
4	23	ETAP FLARE-12/LEDN6D _LTRRevAB (1.000)	780	780	7.5
5	13	ETAP FLARE-12/LEDW10D _LTRRevAB (1.000)	1250	1250	12.0
6	4	ETAP FLARE-12/LEDW5S _LTRRevAB (1.000)	560	560	5.6



Operator
Telephone
Fax
e-Mail

Vinny (Office Lighting) / Summary

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
7	4	ETAP V3RB10M/W3M0D0X0 _LTRevAB (1.000)	2700	2700	23.3
Total:			481870	Total: 481870	3903.7

Specific connected load: $4.99 \text{ W/m}^2 = 1.31 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 781.96 m^2)