




VDD	R _{FBT}	R2	R4	L1 _{MIN} I _{min} =0A1
5V	88k	120k	330k	100u
6V5	120k	120k	—	150u
8V2	158k4	220k	560k	150u
11V	220k	220k	—	150u
16V	330k	—	330k	220u

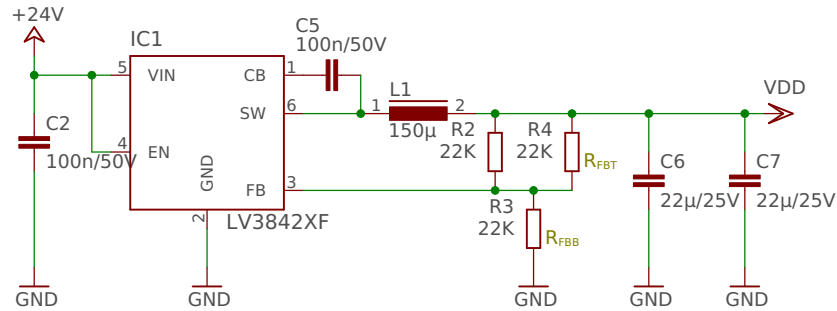


$$R_{FBT} = \left[\frac{V_{OUT} - V_{REF}}{V_{REF}} \right] R_{FBB} \quad V_{REF} = 1.0V \quad f_{SW} = 1.1e6$$

$$V_{OUT} = \left[1 + \frac{R_{FBT}}{R_{FBB}} \right] V_{REF}$$

$$L_{MIN} = \frac{V_{IN,MAX} - V_{OUT}}{0.4 \cdot I_{OUT}} \cdot \frac{V_{OUT}}{V_{IN,MAX} \cdot f_{SW}}$$

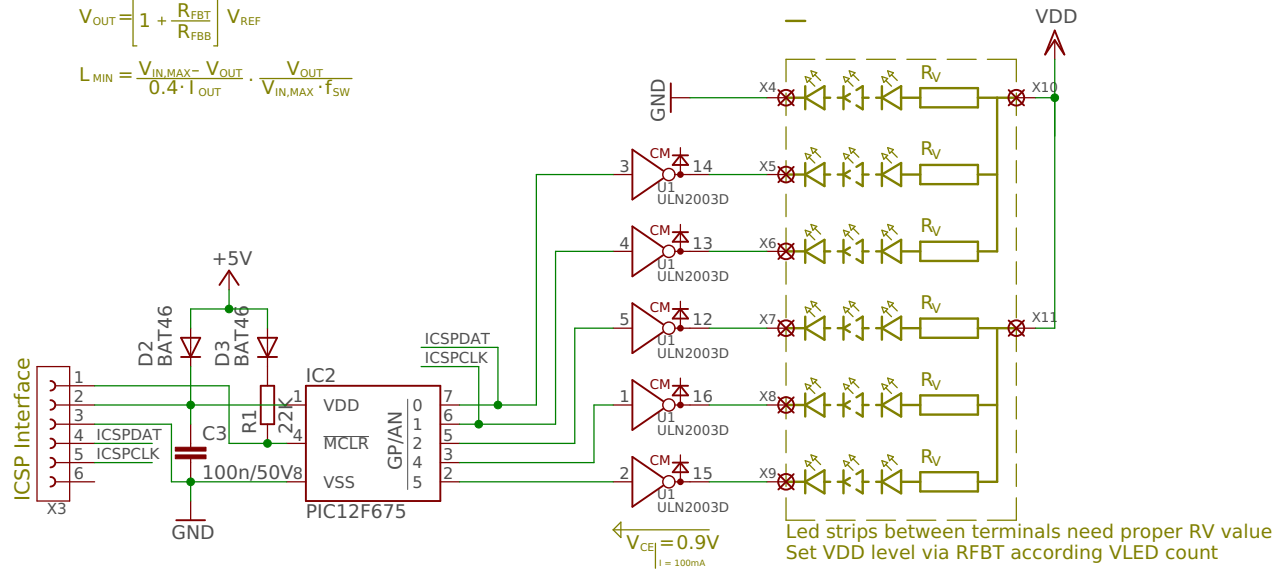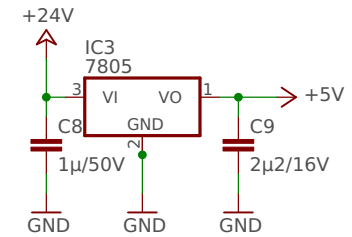

<http://www.sprut.de/electronic/pic/icsp/icsp.htm>
<https://www.ti.com/lit/ds/symlink/lv3842.pdf>
<https://github.com/akaeba/LightControl5C>

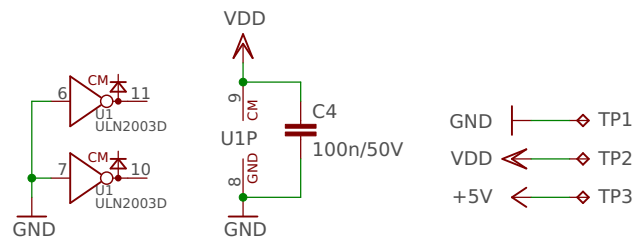

Light control 5-channel

<https://github.com/akaeba/LightControl5C>

TITLE: LightControl5C

Document Number: OMC_2024-12-1

REV:
1

Date: 10.06.26 19:53

Sheet: 1/1