


P2 Micromegas — Simulation Campaign

Test document · Geant4 model of the P2 wedge ·
2026-08-05

This is a **formatting test** — checking that this document reads well on your phone, offline. The real version will cover the full campaign plan. The content below is a small sample pulled from the repo.

The detector at a glance

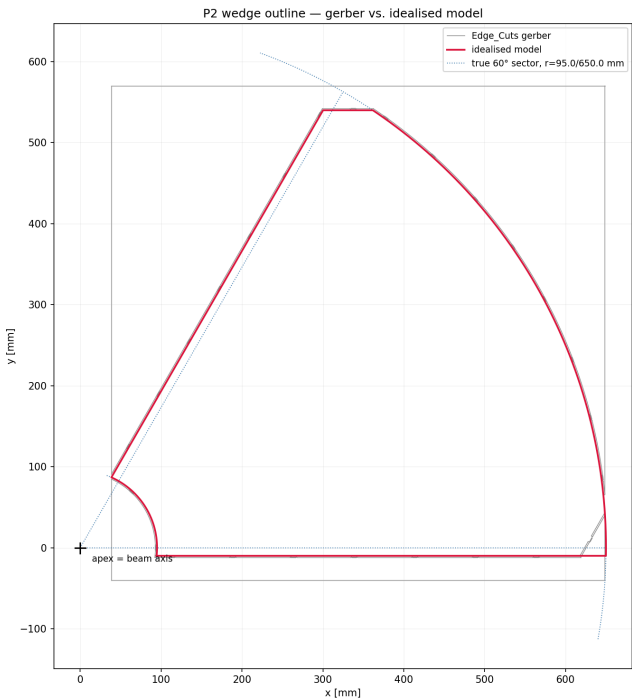


The P2 wedge: 60° annular sector, board $r = 95\text{--}650$ mm, active area $r = 120\text{--}590$ mm.

Shape	60° annular sector, apex on beam axis
Active area	$r = 120 \rightarrow 590$ mm, ≈ 1689 cm ²
Readout	1280 pads = 10×128 ch; 42 rings, 11.43 mm pitch
Pillars	Ø0.5 mm, 2.000 mm pitch, 41 366 total

Readout PCB 18 μm Cu / 200 μm FR4 / 18 μm Cu

Drift gap 3 or 4 mm — **unconfirmed**

The stack as modelled

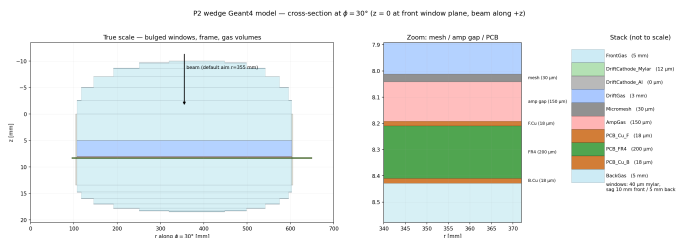

Material stack in the Geant4 model, readout PCB to outer mylar window.

Things like this will be flagged for you: several dimensions in the model are educated guesses (drift gap, mylar thicknesses, bulge heights). The real doc will list each one with its source so you can check them.

If this renders well — figures sharp, table readable without zooming, comfortable text size — the full campaign doc will arrive in this format.