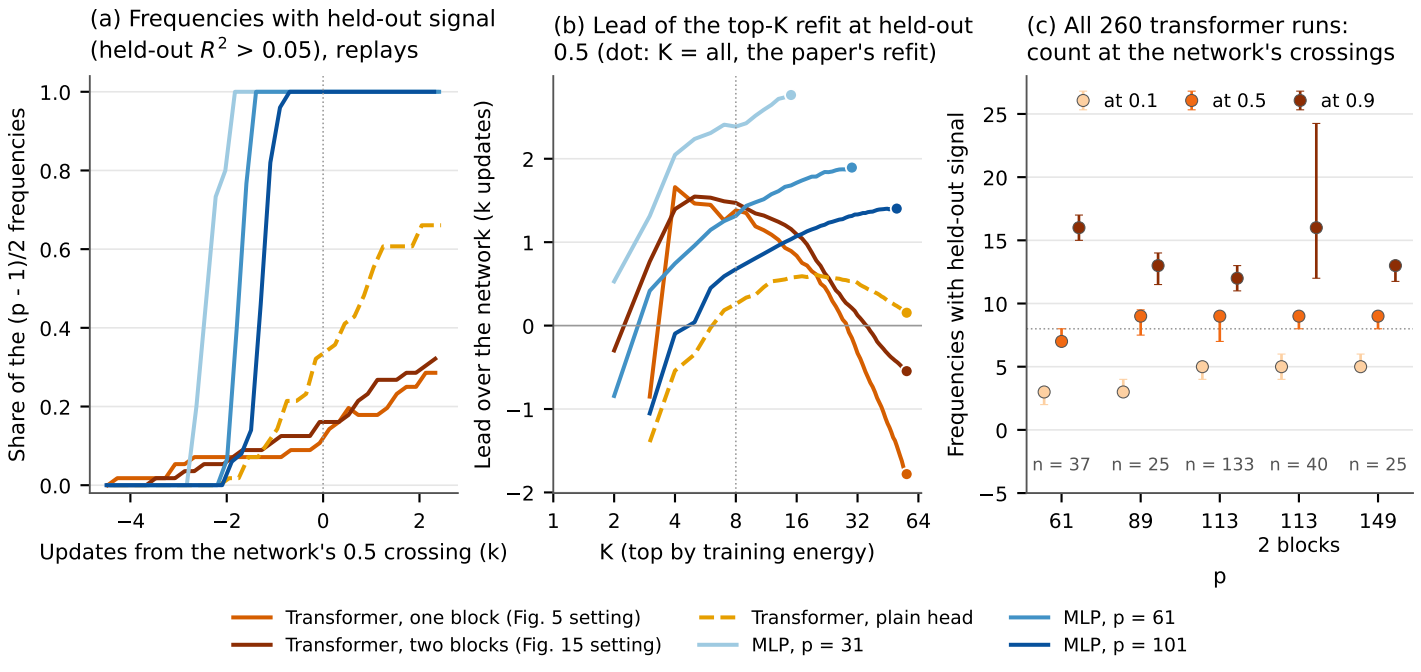
(a) Frequencies with held-out signal
(held-out R^2 > 0.05), replays
Share of the (p - 1)/2 frequencies
Updates from the network's 0.5 crossing (k)
(b) Lead of the top-K refit at held-out
0.5 (dot: K = all, the paper's refit)
Lead over the network (k updates)
K (top by training energy)
(c) All 260 transformer runs:
count at the network's crossings
Frequencies with held-out signal
at 0.1
at 0.5
at 0.9
n = 37
n = 25
n = 133
n = 40
n = 25
2 blocks
p
Transformer, one block (Fig. 5 setting)
Transformer, two blocks (Fig. 15 setting)
Transformer, plain head
MLP, p = 31
MLP, p = 61
MLP, p = 101