

DOOR



Systems

Comète® 70TH



CONCEPT

Comète® door

Comète® door ranges with thermal break are suitable for newbuild and retrofit alike and enable multiple combinations: composite frames with fanlight, fixed side elements, etc.

This line of doors offers a broad choice of fixed and opening frames with mitre cut assemblies and crimp- or screw-fastened corner cleats. The opening frame accepts either glazing or decorative panels. The slot-and-clamp hinge concept enables quick, easy fitting.

Accessories are common to the whole door & window offering and can be customized.

Insulation, design, security the **Comète® 70TH** door isolates and protects from the exterior while featuring strong design choices. Fully customizable, it fits in perfectly with the windows and sliding frames of the High Performance range.


Comète® 70TH meets French building regulation DTU 36.5

Compliant with French RT2012 regulations and "BBC" low energy consumption label



PLUS FEATURES

- Punching tools are available for executing the metalwork on each of the ranges
- Easy-fit sill (detachable)
- Slot-and-clamp or surface-mounted hinges
- Identical internal and external snap-in grooves
- Identical slot-and-clamp locks for the Espace® 50TH

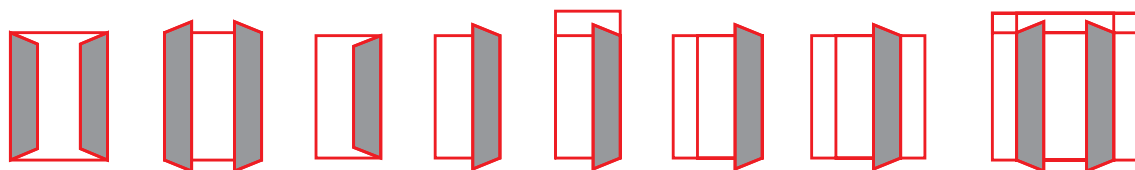

► DOOR


RANGES

70TH Comète®

COMFORT >

Product plus features

- Rabbet width extension accepting infills up to 54mm
- Totally or partly foldable doors possible
- Strip handle for installation of electromagnetic catch

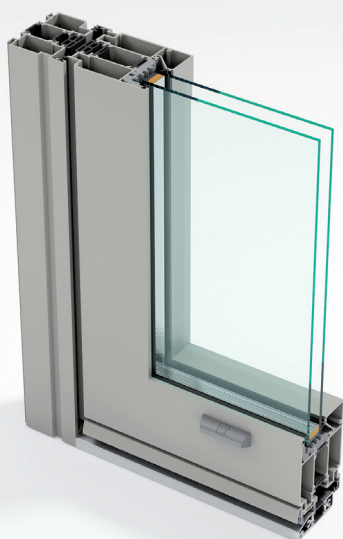

70TH Comète®

< HIGH PERFORMANCE

Product plus features

- Infill up to 55 mm.
- Thermal-break threshold.
- Automatic door bottom sealing mechanism.
- Aligned thermal surfaces thanks to latest-generation centered insulating bars.
- Anti-bimetal twisting effect bar.

INTEGRATION

Comète® doors are perfectly suited to office, industrial, and commercial buildings. A set of dedicated accessories completes the range. One great feature is that they integrate perfectly with composite assemblies.


Product plus features

- Recessed door closer
- Closure catch integration section
- Accessibility sill
- Nip guard option




ONE-PIECE DOOR

A specific fixed-frame system and sill with thermal break allows integration of a one-piece opening frame in the Isosta Solobloc range. It is just as suitable for integrated rabbets as for add-on rabbets. Total customization becomes possible thanks to all the opening frame models on offer. The 50-colour range coordinates well with the Installux offering.

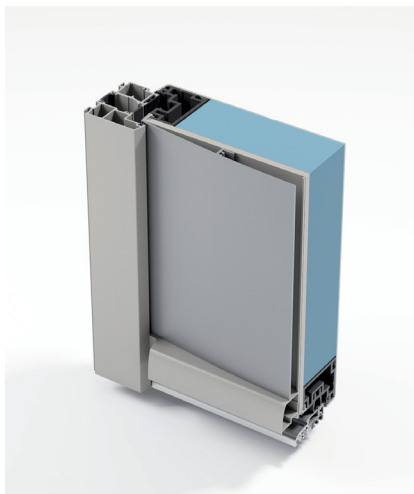

Product plus features

- Opening frame chassis made from composite material
- Heightened thermal performance $U_d \leq 1.0 \text{ W/K.m}^2$
- One-piece opening frame, thickness 68mm
- Bimetal effect attenuated by honeycomb system on outside of panel
- Lacquered surface-mounted hinges
- Possibility of closure with 5-point automatic lock (rollers or mixed rollers and hook catch)

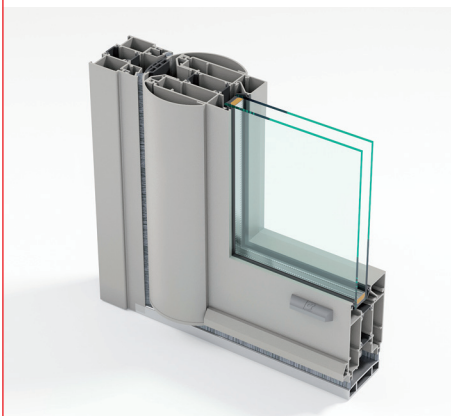

NIP GUARD

This is a complete range that meets current standards and is simple to implement. It is wholly compatible with our 70TH and Univers® 54 ranges.

Product plus features

- Single- and two-leaf
- Integration with composite frame
- Recessed door closer
- Pivot point flush with floor or recessed in top rail
- Pre-machining of window rails

CONNECTED DOOR

AUTOMATIC ELECTRIC LOCK

Product plus features



- Automatic locking with magnetic triggering
- 3-point lock with double hook latch
- 100% adjustable strike plate
- Optional day-access strike plate
- Normal lock operation in the event of a power cut

FINGERPRINT READER



Product plus features

- Biometric fingerprint reader
- Integration with the opening frame
- Simple "Plug and Play" installation
- Up to 99 fingerprints can be saved
- Easy creation, activation, and deletion of user profiles
- Access control via a free application (Google Play/Apple store)




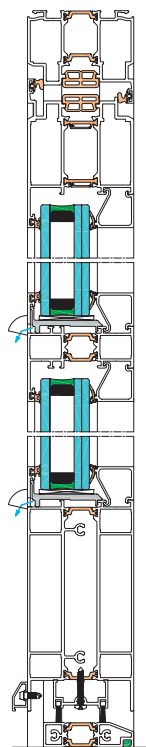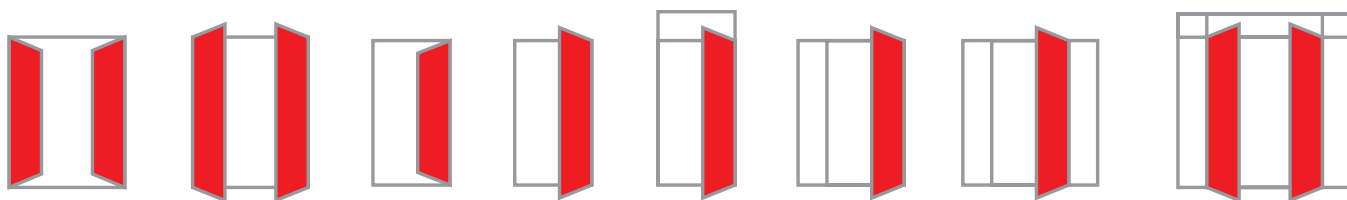


Vertical section A-A

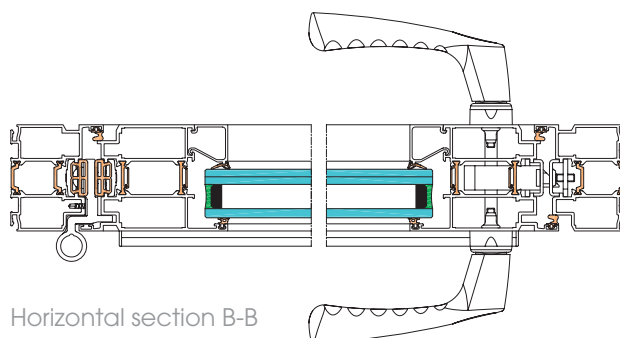

Horizontal section B-B



Surface hinge

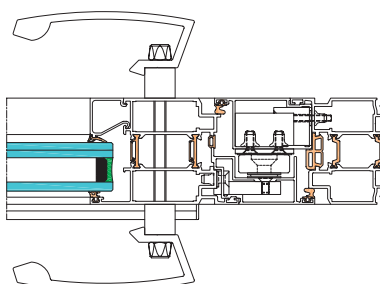

Detail of
electromagnetic lock

PLUSES FABRICATION & FITTING

Machining

- Punching tools available for all the machining operations.
- Optional 3-pt cam lock without machining for top & bottom points.
- Clamp hinges

Assembly

- Specific 3D corner cleats, crimped or screw-fixed, sealant injection possible.

Profile Optimization

- Identical self-clipping grooves in- and outside.
- Identical extension plates and architraves for the 70TH & 32TH ranges.

Fitting

- 3-dimensional hinge adjustment.
- Choice of extension plates accepting any insulation thickness.
- Four installation possibilities: IWI (internal wall insulation), EWI (external wall insulation), Monobrick, or wood structure.

COMPARISON CHART

	Comète® 70 TH
Accepts infill depth of:	up to 55mm
Finishing gasket on opening and fixed frame	white, grey, or black
Architraves for retrofitting	1 style
Three styles of mix & match glazing beads	•
Auto-retract kick plate	•
Anti-warp strip (bimetal effect)	•
Optional anti-unhinging and anti-vandalism kits	•
Low sill meeting accessibility standards	•

PERFORMANCE RATINGS

		Comète® 70 TH			
		AIR/WIND/WATER			
Configuration	Dimensions (mm)				
Single-leaf inward opening door	1,100 x 2,200		-	-	-
Single-leaf inward opening door	1,200 x 2,200		A4	E5A	VC4
SOLOBLOC single-leaf inward opening door	1,006 x 2,234.5		A4	E3B	VC5
		THERMAL			
Configuration	Dimensions (mm)		Ug	Uw	Acotherm class
Single-leaf inward opening door with 4/16/4 glazing	1,000 x 2,100		1.1	1.8	TH9
Single-leaf inward opening door with 4/16/4 glazing and XPE foam ref. 540008	1,000 x 2,100		1.1	1.6	TH10
		ACOUSTIC			
Configuration	Dimensions (mm)		Ra.tr (glazing)	Ra.tr (window)	Acotherm class
Single-leaf inward opening door	960 x 2,185		27	28	AC1
Single-leaf inward opening door	960 x 2,185		35	35	AC2
Single-leaf inward opening door	960 x 2,185		41	38	AC3
Single-leaf inward opening door	960 x 2,185		42	38	AC3
Single-leaf inward opening door	960 x 2,185		43	39	AC3

Reports available in your Partner Area on the www.installux-aluminium.com website

COMPLETED PROJECTS





SUPERCHARGING YOUR PERFORMANCE



Combine our solutions and multiply your creativity



SERVICES

Because being a partner is first and foremost a story of people, where closeness and good service are two key values of the Customer experience! We have the ability and willingness to adapt to each of our customers for personal, bespoke service.



INOV

An innovative, forward looking initiative to assist you on the way to tomorrow's world. Steal a march with Installlux!



PROGRAMMES

Specific programmes to assist you in developing your activity and to address your growth, optimization, management, and change issues.



CAMPUS

A 360° service to assist you in developing your business and promote your company through its human capital. Skills could quite well be at the core of your company's development and long-term viability issues.

INSTALLLUX
G U L F



**ALUMINIUM
& PARTNERS**

INSTALLLUX GULF B.S.C.(C)
P. O. Box: 10229
Manama, Kingdom of Bahrain
T +973 1759 0589
info@installluxgulf.com

installluxgulf.com

INSTALLLUX SA
Chemin du Bois Rond
69720 Saint-Bonnet-de-Mure, France
T +33 472 48 31 31

installlux-aluminium.com