

TECHNICAL DESCRIPTION & APPLICATIONS



TECHNICAL DESCRIPTION

Application

Sliding French window in lift & slide version with 1, 2, 3, or 4 leaves or pocket door version with 1 or 2 leaves on a single rail, or single rail with fixed and 1 or 2 sliding leaves, or corner sliding frame. Made from 6060 extruded aluminium with thermal break by crimped-in strip (patented system). Full range of joinery for new build and retrofit projects. Enables the installation of very large picture windows. Low sill option to comply with disabled access regulations.

Fixed frame

Straight-line design, mitre joint assembly, width 124mm. Square bracket assembly, stainless steel glide rails. Embedding in bare carcass or any other type of frame using fastening lugs. Offset mountings up to 200mm, quick-clip weather bars, offset architraves. Available with accessibility sill.

Opening frame

With mitre joint and glazing bead, width 62mm, accepts glazing depths of 24-47mm. Square bracket assembly. Extra slim centre stile 70mm.

Lifted sliding action on fixed trolleys with stainless steel rollers, max. tested load: 300kg per leaf.

Locking: 2-, 3- or 4-point. Stiles with stiffeners to suit exposure and joinery height.

Weatherproofing

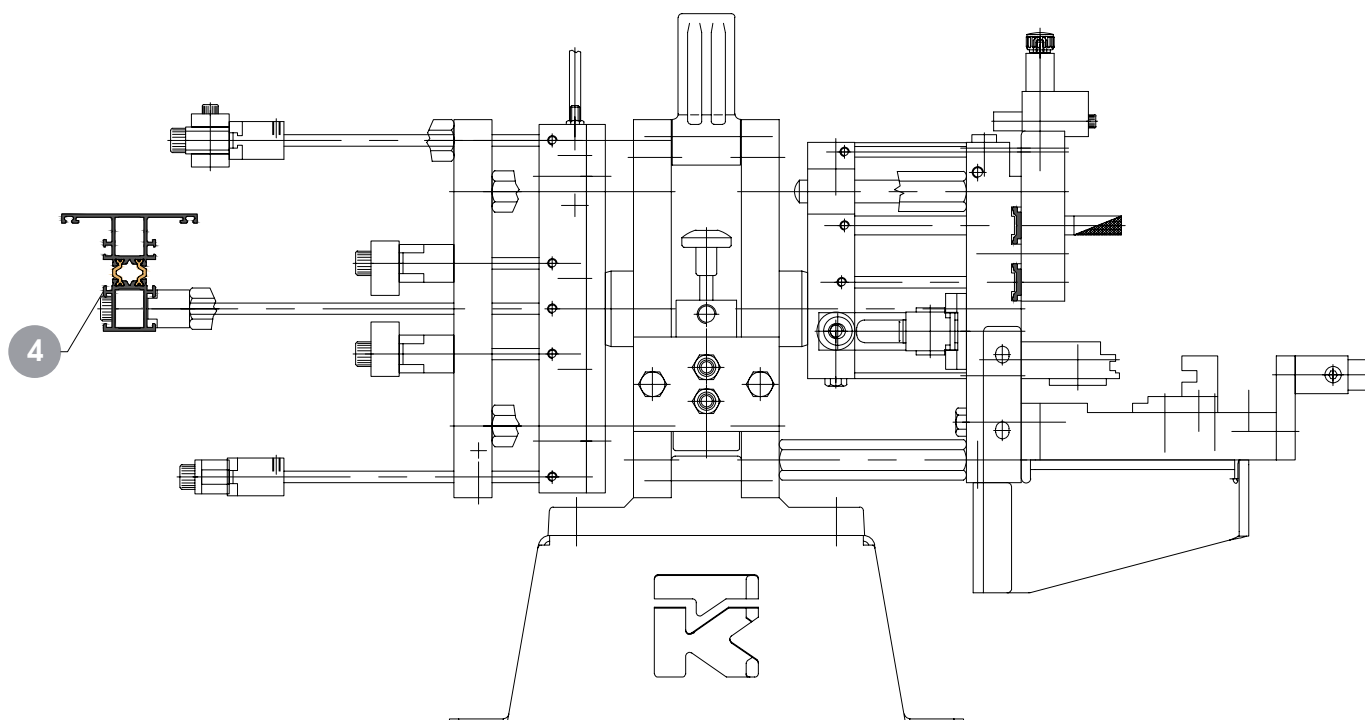
By EPDM snap-in gaskets for infills, and EPDM sliding gasket between opening and fixed frames, mounted PVC thermal strips and shield, with moulded sealing elements.

Surface treatment

Anodizing: class 20 for satin silver, class 15 for other shades (class 20 on request).

Quality: QUALANOD-EWAAEURAS, per standard NFA 91450. Powder coating: 80 microns QUALICOAT/QUALIMARINE label.

PUNCHING TOOLS



471000N

Self-contained hydraulic-pneumatic tool comprising:

- 1500kg punch ram (below 6 bar)
- Punch tools
- 1 blow gun
- Directional valve
- Operating pedal (pedal only **40077**)
- Adjustable stop
- Packaging
- Operating instructions

SPARE DIES AND PUNCHES

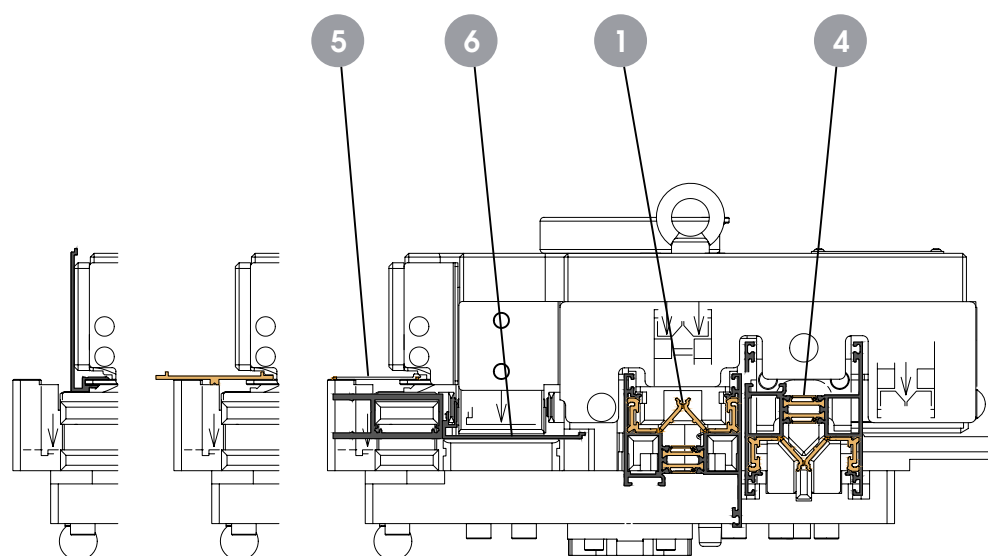
Machining operation	Punch		Die	
	Ref.	Item	Ref.	Item
4	471040	Opening frame cutters Ø 6 X 212.5	4710411	Opening frame die punch position 4

N.B., Read the instruction booklet before starting. Lubricate the punches regularly with our lubricant **40051**.

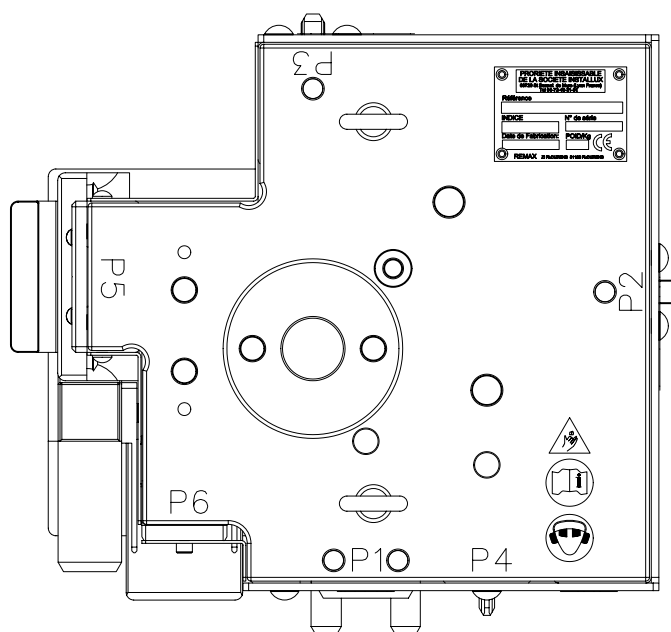
PUNCHING TOOLS

PARTS LIST		
Item & reference	Machining	Sections
Assembly block machining OPENING FRAMES : 910022 - 910024	910022 or 910024 460012 4 22 910226 Ø6 11.9 Ø6	910226

PUNCHING TOOLS



Removable stop for going
right or left on 920221

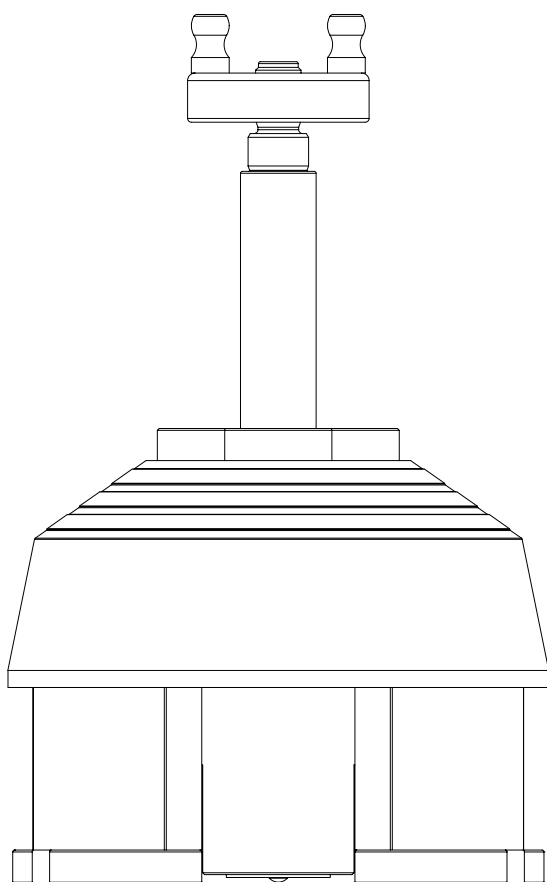
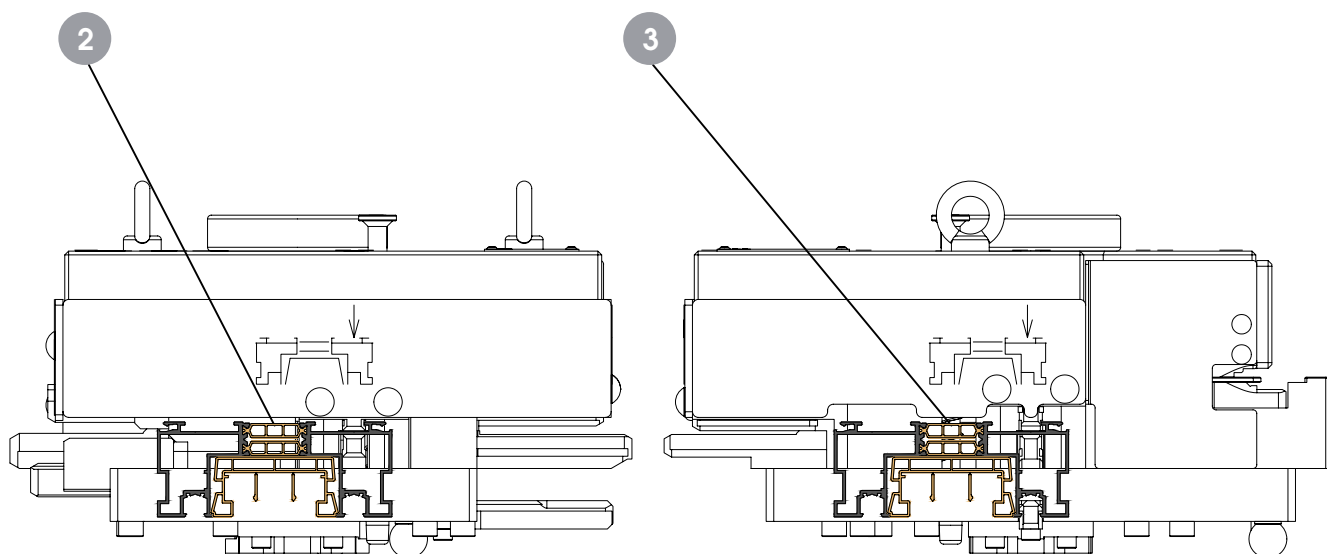


970201

- Rotating Punching Head
- Stroke: 14mm
- Weight: 33kg

N.B., Read the instruction
booklet before starting.
Lubricate the punches
regularly with our lubri-
cant **40051**.

PUNCHING TOOLS



473000

Cylinder:

- Dimensions: L x W x H = 350 x 350 x 460mm
- Force: 3 tons
- Stroke: 30mm
- Weight: 17 kg
- Pressure: 6 bar, max. 8 bar
- 1 bellows
- Control pedal (pedal only ref. 40078)
- Packaging
- Instruction booklet

N.B., Read the instruction booklet before starting. Lubricate the punches regularly with our lubricant **40051**.

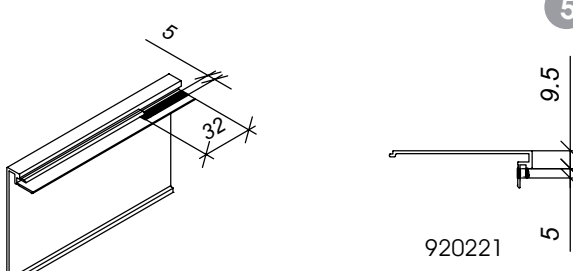
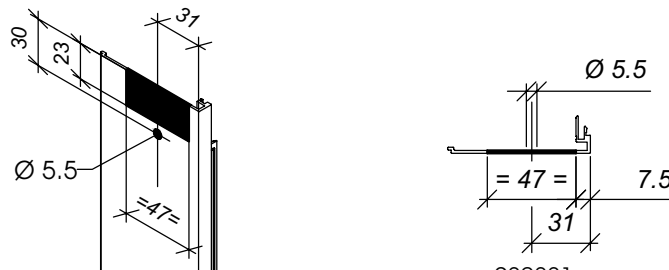

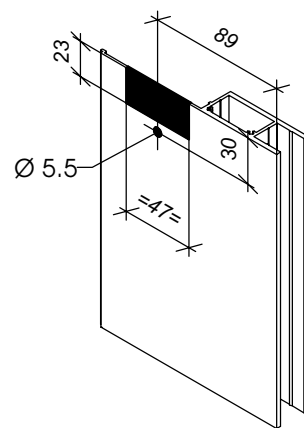
PUNCHING TOOLS

PARTS LIST		
Item & reference	Machining	Sections
Machining for the screw corner cleat 960201	1 910221 910222 910227	910221 - 910222 - 910227
Machining for the screw corner cleat 960200	2 910200 ou 910201	910200 - 910201 - 910202

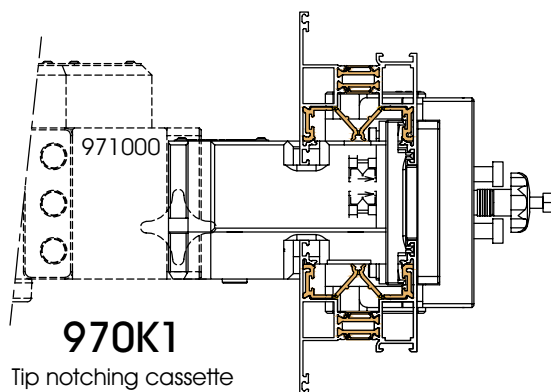
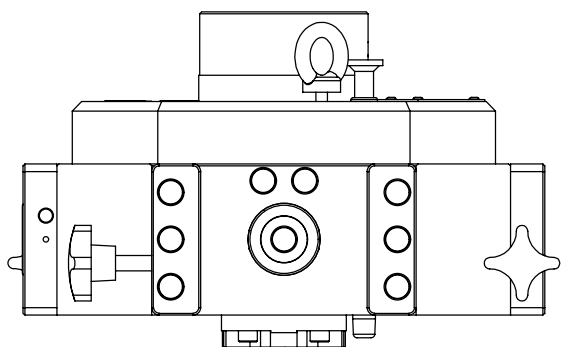
PUNCHING TOOLS

PARTS LIST		
Item & reference	Machining	Sections
Machining for the junction block 960205	3 Ø8 41 5248 Ø8 5248 Ø8 960205 Ø8 20 20 910200 or 910201	910200 - 910201
Notching the heat shield on the opening frames	4 18 18 18 18 27.5 910222	910222 - 910224
Sill strip cover drain holes	5 5 32 32 5 5 6.7 930204 5 9.5 930205	930204 - 930205

PUNCHING TOOLS

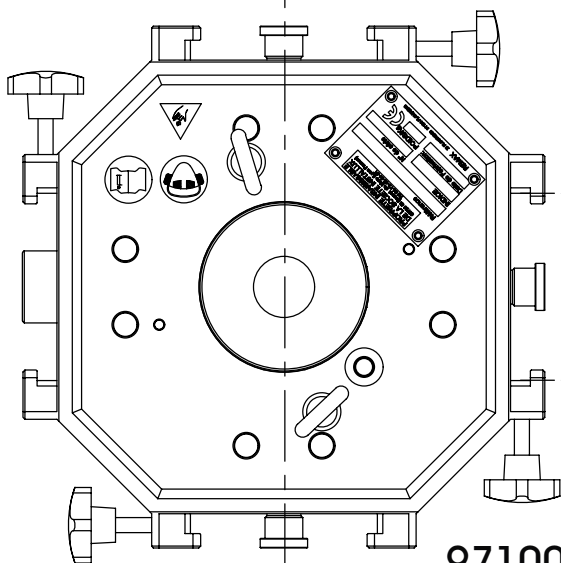
PARTS LIST		
Item & reference	Machining	Sections
Notching the centre stile cover for clipping on	 5 32 5 9.5 5 920221	5 910200
Punching the centre stile covers for fitting the stile-top sealing piece 960210	 30 23 37 31 47 Ø 5.5 Ø 5.5 47 31 7.5 920221	6 920221 - 920222P
	 Ø 5.5 47 65.5 89 30 920222P	
	 23 89 30 47 Ø 5.5	

PUNCHING TOOLS



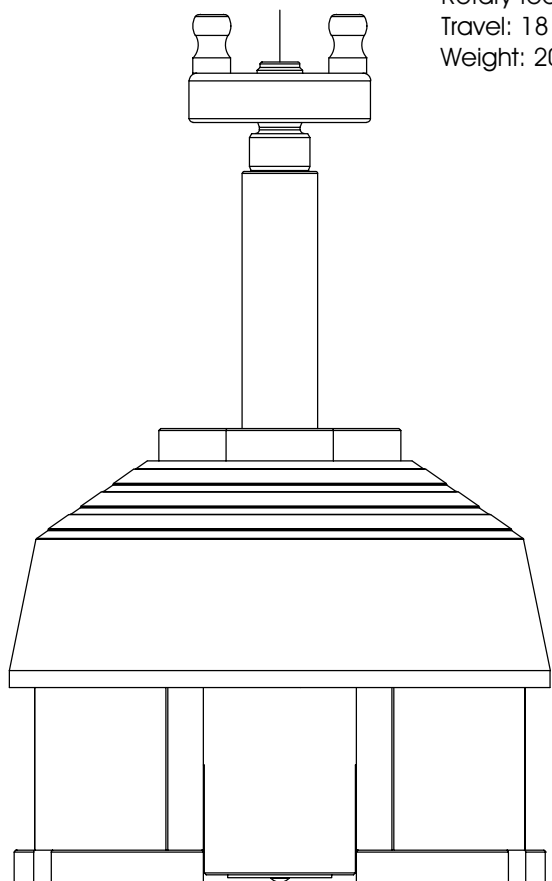
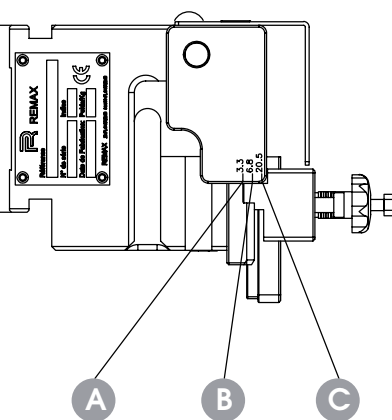
970K1

Tip notching cassette
• Weight: 5.2 kg



971000

Rotary tool
Travel: 18 mm
Weight: 20 kg



473000

Ram:


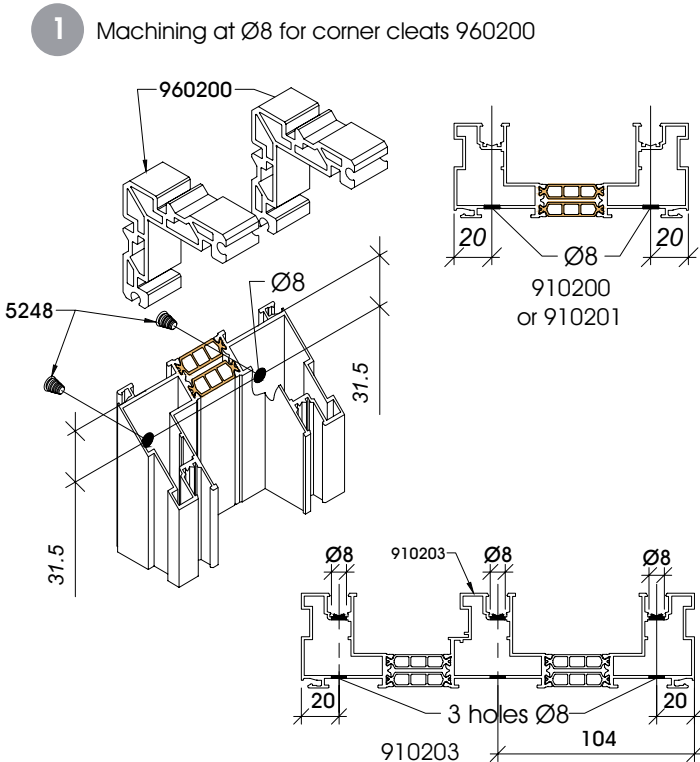
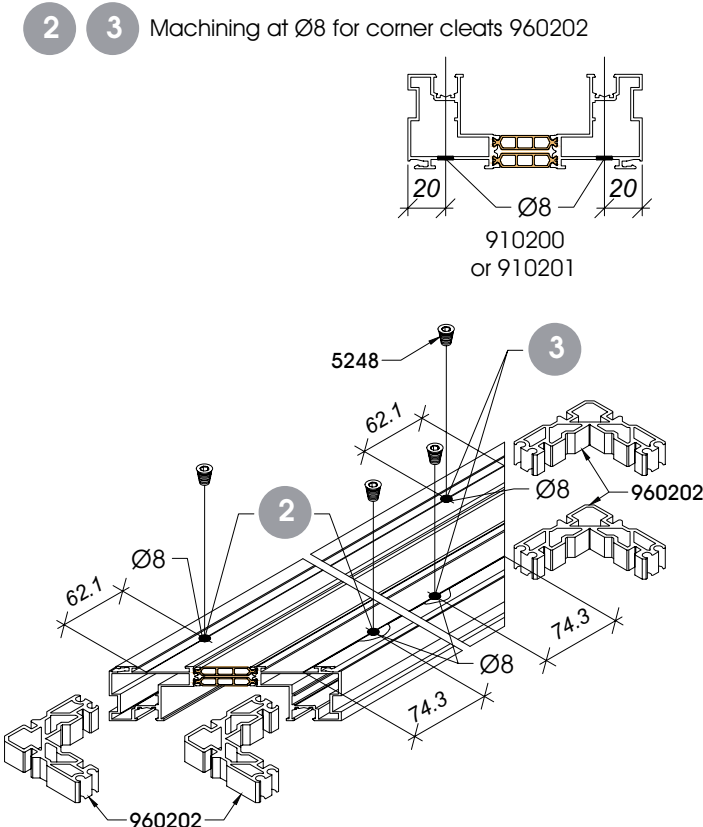
- Dimensions: (WxLxH) 350 x 350 x 460 mm
- Force: 3 tonnes
- Travel: 30 mm
- Weight: 17 kg
- Pressure: 6 bar, max. 8 bar
- One blow gun
- Operating pedal (pedal only ref. 40078)
- Packaging
- Operating instructions

N.B., Read the instruction booklet before starting. Lubricate the punches regularly with our lubricant **40051**.


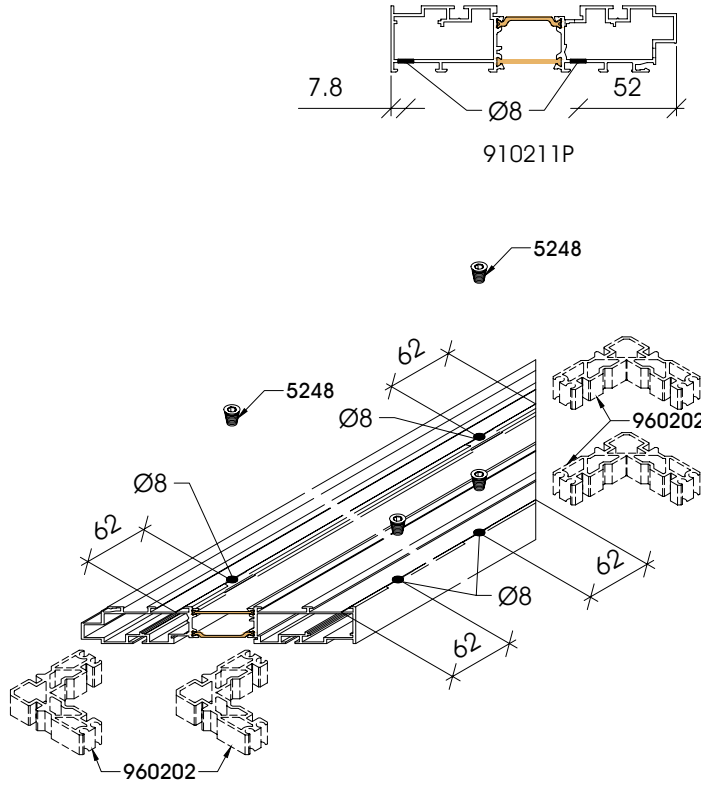
PUNCHING TOOLS

PARTS LIST		
Item & reference	Machining	Sections
Machining spear height 3.3 mm	Butée A	910222
Machining spear height 6.8 mm	Butée B	910222
Machining spear height 20.5 mm	Butée C	910222


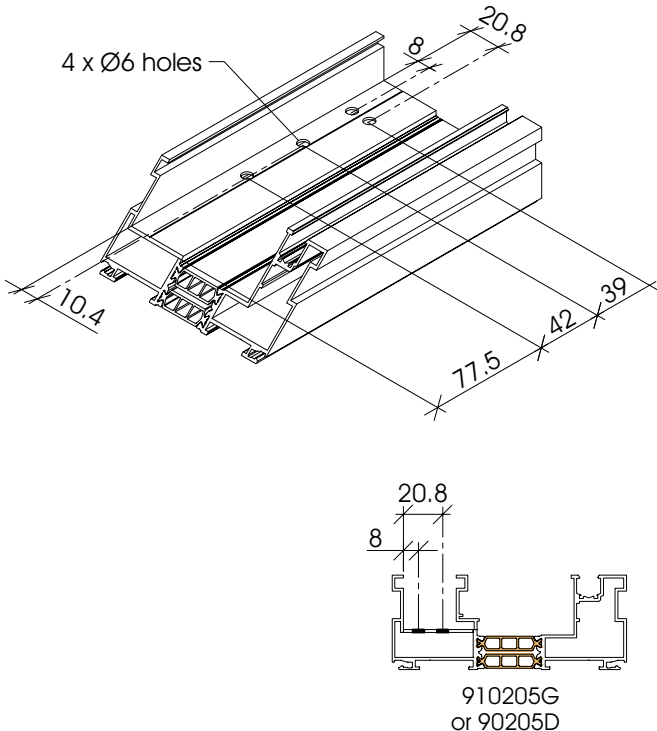

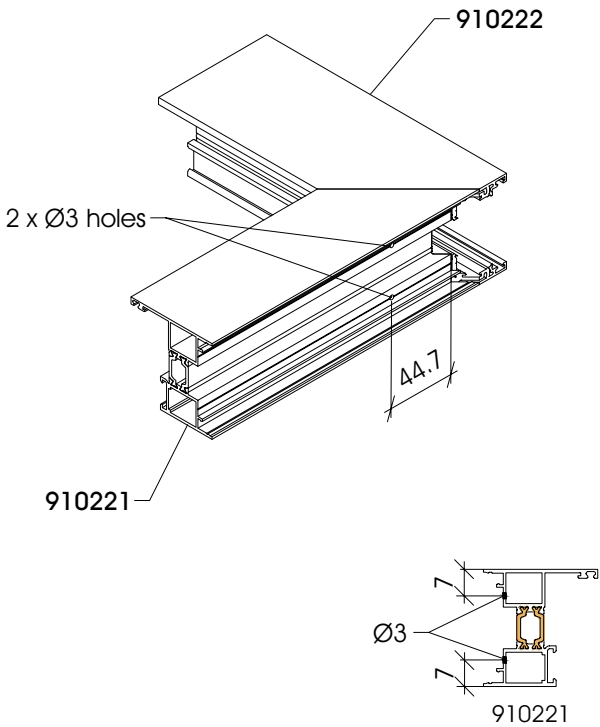
DRILLING TEMPLATE

PARTS LIST		
Item & reference	Machining	Sections
 970200 Drilling template for corner cleat 960200 and 960202	1 Machining at Ø8 for corner cleats 960200 	910200 - 910201 - 910202 - 910203
	2 3 Machining at Ø8 for corner cleats 960202 	910200 - 910201 - 910202

DRILLING TEMPLATE


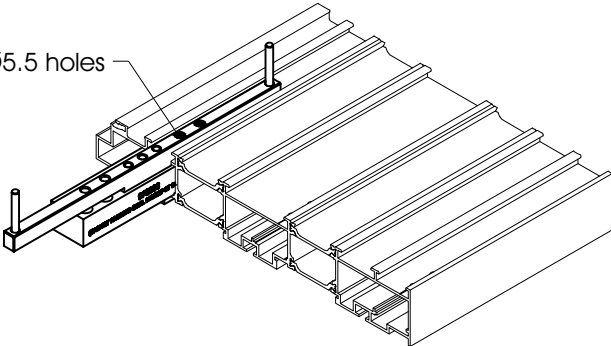
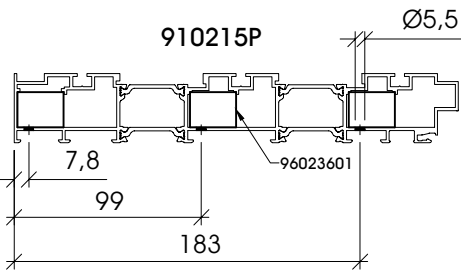

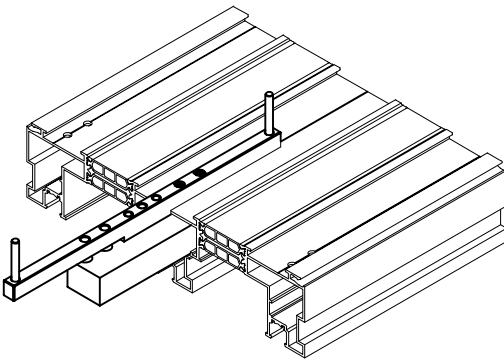
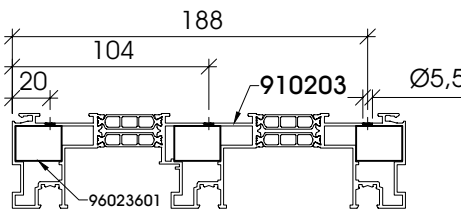
PARTS LIST		
Item & reference	Machining	Sections
 970202 Drilling template for corner cleats 960202 for sill 910211P for corner sliding frame application	Machining at Ø8 for corner cleats 960202  910211P 5248 62 Ø8 960202 62 Ø8 62 960202	920221P

DRILLING TEMPLATE


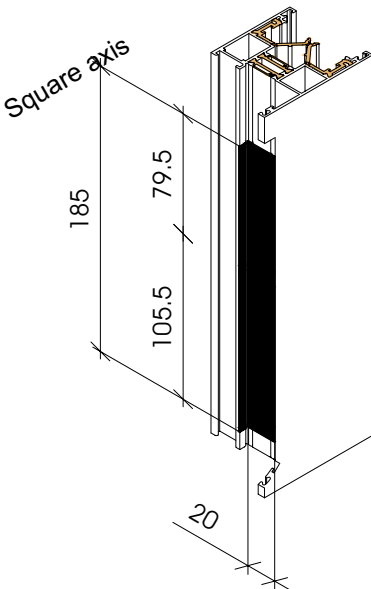


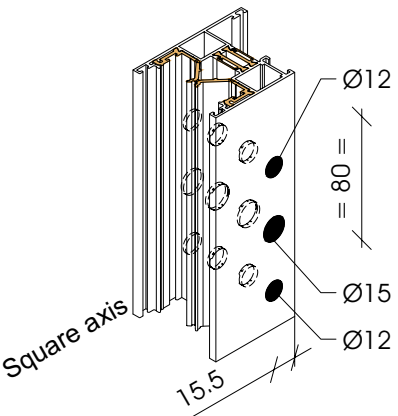


PARTS LIST		
Item & reference	Machining	Sections
 970206 Drilling template for motor unit fastenings	 4 x Ø6 holes 910205G - 910205D 910205G or 90205D	910205G - 910205D
 970207 Drilling template for guide block fastenings	 910222 2 x Ø3 holes 910221 910221	910221

DRILLING TEMPLATE

PARTS LIST


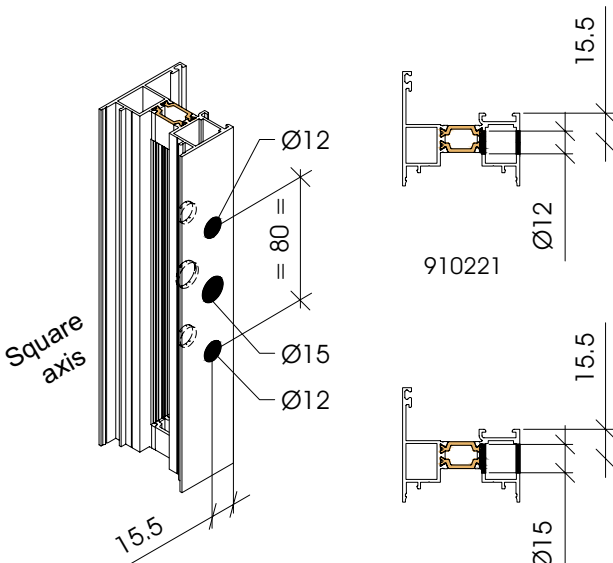

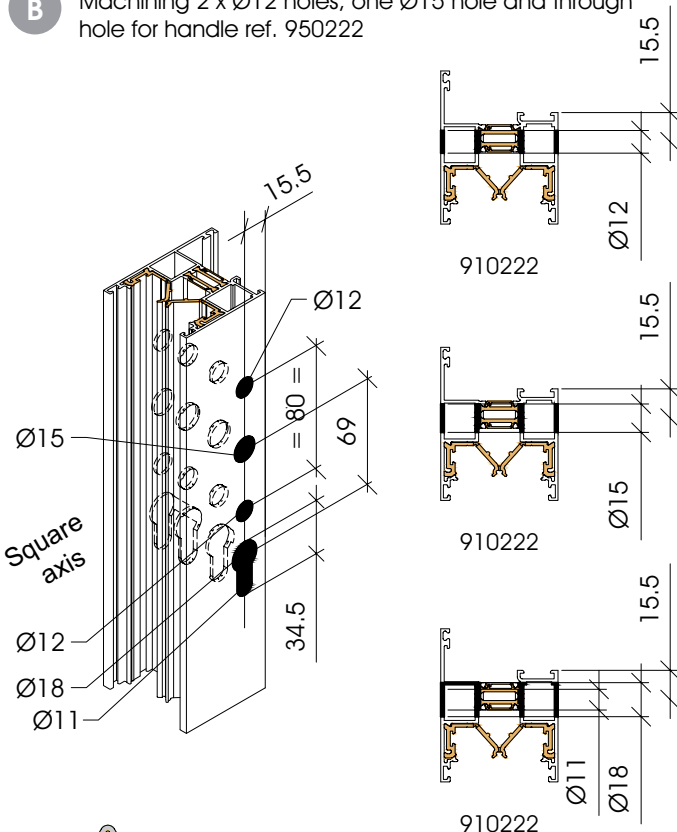
Item & reference	Machining	Sections
 970208 Drilling template for sill 910215P and fixed frame 910203	Drilling of the profiles to connect the frame using kit ref. 960236 2 x Ø5.5 holes   910215P Consult our manufacturing drawing 9208V	910215P
 970208 Drilling template for sill 910215P and fixed frame 910203	Drilling of the profiles to connect the frame using kit ref. 960236   910203 Consult our manufacturing drawing 9208V	910203

MILLING TEMPLATES


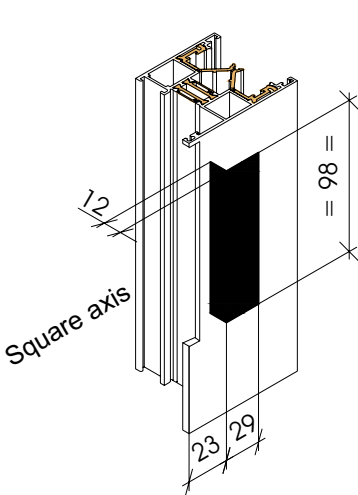

PARTS LIST		
Item & reference	Machining	Sections
 970203 Milling template for sash frame handles & hardware	A Machining for the main lock body ref. 950210, 950211  	910221 - 910222 910224
 970203 Milling template for sash frame handles & hardware	B Machining 2 x Ø12 holes and one Ø15 hole for handle ref. 950220     Important: Machining operation B must be done after operation A	910222 - 910224

MILLING TEMPLATES

PARTS LIST


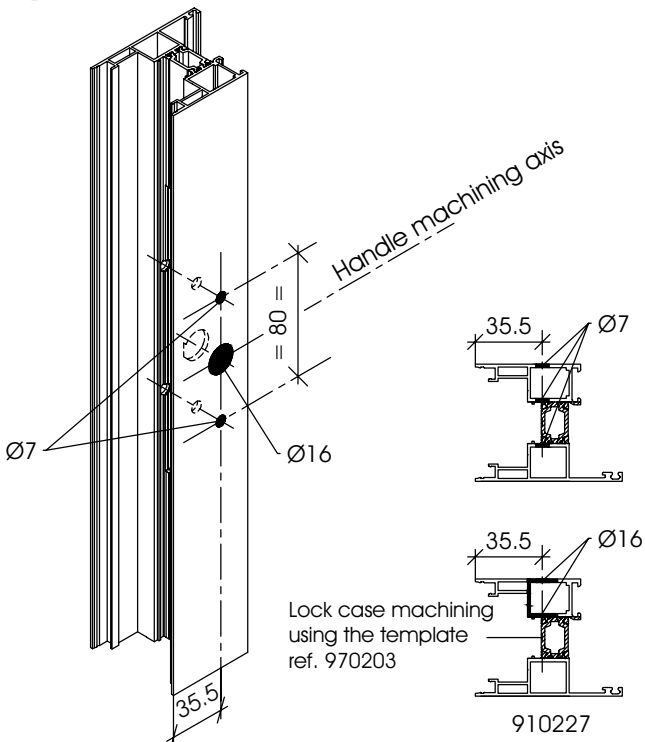
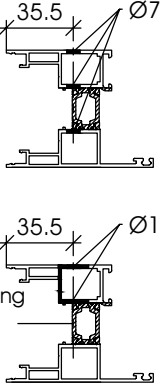
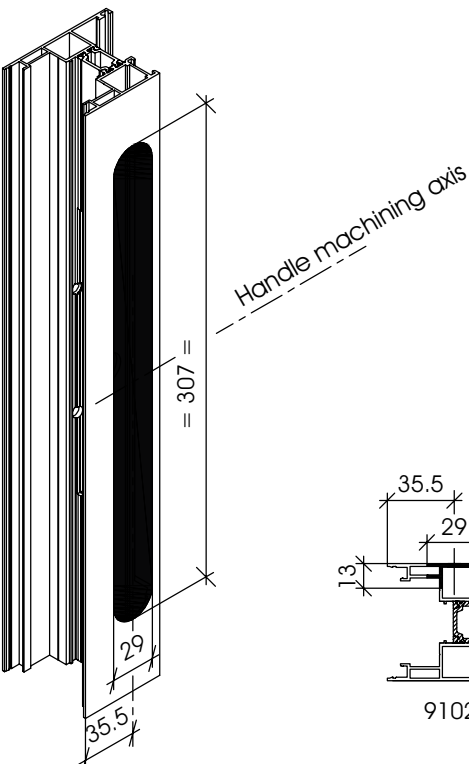

Item & reference	Machining	Sections
 970203 Milling template for sash frame handles & hardware	B Machining 2 x Ø12 holes and one Ø15 hole for handle ref. 950221  Ø12 80 15.5 Square axis Ø15 Ø12 15.5 910221  Important: Machining operation B must be done after operation A	910221
 970203 Milling template for sash frame handles & hardware	B Machining 2 x Ø12 holes, one Ø15 hole and through hole for handle ref. 950222  15.5 Ø12 80 15.5 Square axis Ø15 69 34.5 Ø12 Ø18 Ø11 15.5 15.5 15.5 Ø11 Ø18 910222 - 910224 910222  Important: Machining operation B must be done after operation A	910222 - 910224

MILLING TEMPLATES


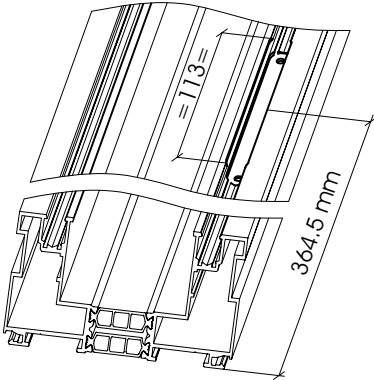


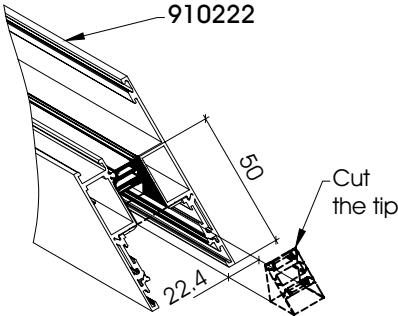

PARTS LIST		
Item & reference	Machining	Sections
 970203 Milling template for sash frame handles & hardware	C Machining of 93 x 29 opening for flush handle ref. 950220   910222  Important: Machining operations C must be done after operation A	910222 - 910224

MILLING TEMPLATES

PARTS LIST

Item & reference	Machining	Sections
 970204 Copy template for handle ref. 950223	A Machining for flush pull fastening ref. 950223  Lock case machining using the template ref. 970203  910227  Machining A is carried out after machining the lock case, using copy template ref. 970203	910227
	B Machining of opening for flush pull ref. 950223   910227	910227

MILLING TEMPLATES

PARTS LIST		
Item & reference	Machining	Sections
 970209 Copy template for closing damper	A  	910200 910203
 970209 Copy template for closing damper	B  	910222

