


TECHNICAL DESCRIPTION AND APPLICATIONS



APPLICATIONS

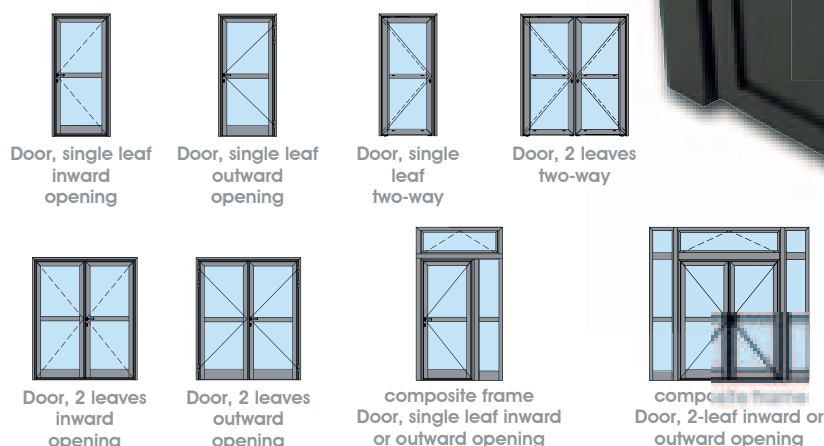

TECHNICAL DESCRIPTION

Application

Non-overlapping door with slot-and-clamp or surface-mounted (anchor bolt) hinges or swing mounted on floor pivot plate made from extruded aluminium (6060T5) with central crimped polyamide strips providing thermal break.

The hinges are adjustable without offsetting the barrels and can thus be realigned without spoiling the perfect looks.

Full range of locks from 1- to 5-point; no machining required on fixed frame.

The only machining operation is for the central lock case on the 3-point lever latch lock.

A recessed door closer can be fitted and is completely hidden by the closed door.

Fixed frame

70mm wide fixed frame with flat bottom or pressed metal groove to accept architraves and shutter pieces. Mitre-cut assembly with screw-on or crimp-on corner cleats.

Various combinations enable composite frames with fanlights in the fixed and opening parts, taken directly from the Espace® 70TH range.

Standard sills or sills with thermal break are available.

Opening frame

Single or double door, inward, outward, or two-way opening. 70mm thickness leaf with thermal break; mitre-cut assembly with screw-on or crimp-on corner cleats. Square-cut kick plate available. Glazing from 24mm to 44mm. Finishing trim on opening and fixed frames.

Weatherproofing

Closed cell EPDM for the weather seal (surround gasket).

Black or grey EPDM gasket for the external glazing seal.

Black or grey TPE gasket for the internal glazing seal.

Surface treatment

Anodizing: Class 20 for satin silver, class 15 for other colours. QUALANOD-EWAA-EU-RAS quality label per standard NFA 91 450.


Powder coating: 80µm marine grade, QUALICOAT/QUALIMARINE/QUALIDECO quality label.

CONTENTS

GENERAL	pages 2-16
SECTIONS	pages 17-47
CROSS SECTIONAL VIEWS	pages 49-89
OPTIONS	pages 60-77
ASSEMBLY TOOLS	pages 78-103
ACCESSORIES	pages 104-112

WEIGHT AND DIMENSION LIMITS

Installation of glazing packers

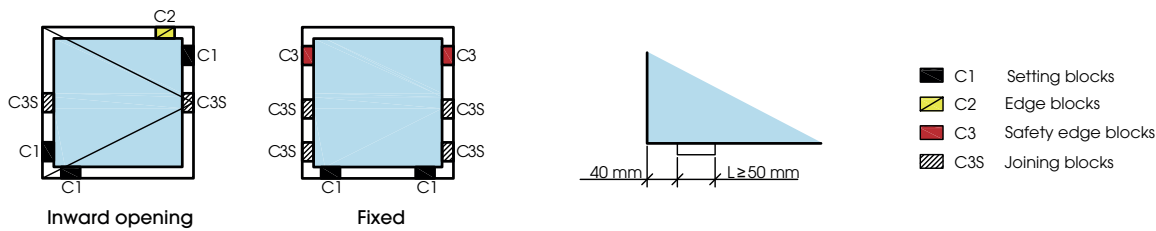

GLAZING PACKER LOCATIONS (per French building regulation DTU 39 P1-1)

The distance between the edge of the glazing and the edge of the nearest setting block must be at least 40mm to prevent excessive stress on the corners of the pane.

Packers C1, C2, and C3 must be positioned as shown on the sketch above, without adding any other packers.

Where necessary, the C3S blocks shown are inserted to limit the effects of stress on the joinery, notably in the joinery plane during handling and operation. They also stop the edges of the pane coming into contact with the metal of the sections. They are placed at mid-point of the length that is liable to deform.


Steps must be taken to ensure the packers always remain in place. For glued panes, the adhesive used must be compatible with the rabbet materials, including the glazing parts.

N.B.,


Supports are available to facilitate packer installation (ref. **560001**).

PERFORMANCE RATINGS

A.E.V.				
DOOR, SINGLE LEAF, INWARD OPENING		A*4	E*5A	V*C4
THERMAL				
Door, single leaf H x W = 2.10m x 1m, Glazing 4/16/4, reinforced thermal insulation with Warm Edge insert (Ug = 1.1 W/K.m2)			Uf average (W/m².K)	UW (W/m².K)
Standard			2.6	1.8
Improved with thermal shield ref. 630014			2.5	1.7
ACOUSTIC				
	Rw Glazing (dB)	Ra,tr Glazing (dB)	Rw Door (dB)	Ra,tr Door (dB)
4-16-4 (thickness: 24mm)	30	27	33	28
8/12/44.2A (thickness: 29mm)	40	35	39	35
12/20/44.2A (thickness: 41mm)	45	41	41	38
44.2A/20/66.2 (thickness: 42mm)	49	43	42	39
44.2A/16/88.2A (thickness: 42mm)	48	42	40	38
Acoustic report: Saint Gobain: ref. : ACB - 547 - 0315				



630014




Repeated opening and closing wear resistance


Item	Overall dimensions	Observations
Single-leaf, two-way door with nip guard, sunken floor pivot, and closer	W x H = 1300mm x 2500mm	Compliant with standards EN 1191 and EN 12400 500,000 cycles - grade 7 (700,000 test cycles executed)
CETIM test report No. TEC0001905 (partial) No. 1/2 dated 26/07/2016		
Single leaf door with slot-and- clamp hinges	W x H = 1100mm x 2300mm	Compliant with standards EN 1191 and EN 12400 1,000,000 cycles - grade 8
CETIM test report No. TEC0001905 (partial) No. 2/2 dated 07/10/2016		

WEIGHT AND DIMENSION LIMITS

Two-leaf hinges

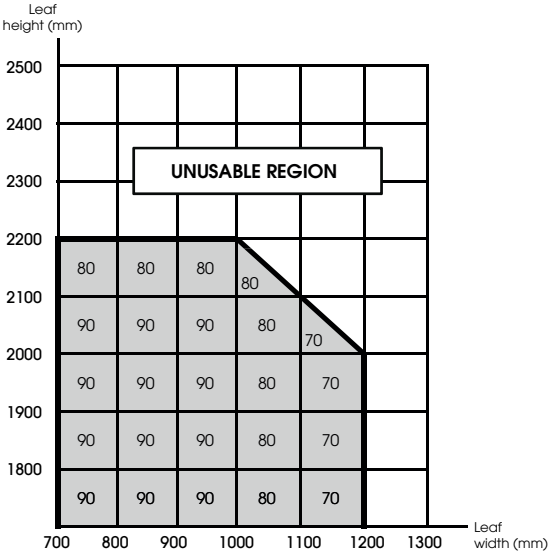


Slot-and-clamp hinge ref 560011
SURFACE-MOUNTING HINGES ref A5081 and A5084

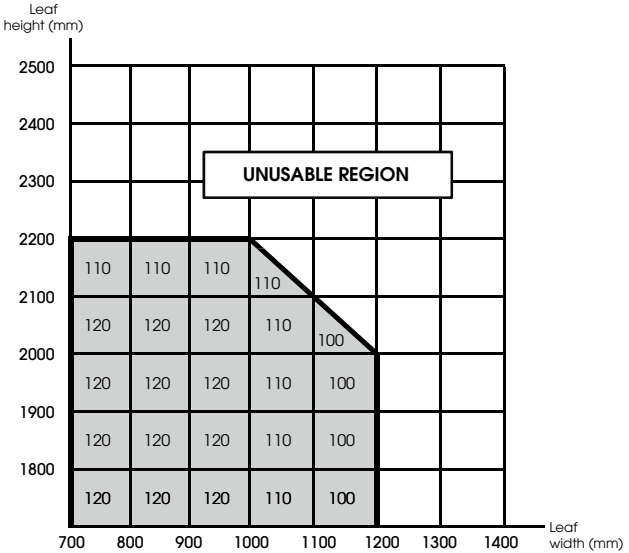

SURFACE-MOUNTING HINGES ref A5080


POSITION OF SLOT-AND-CLAMP HINGES

Reference 560011

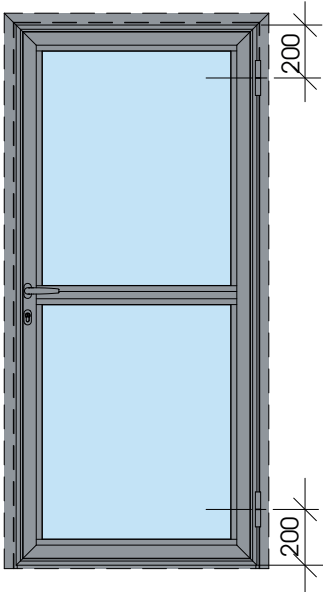



POSITION OF SURFACE-MOUNTING HINGES

Reference A5080

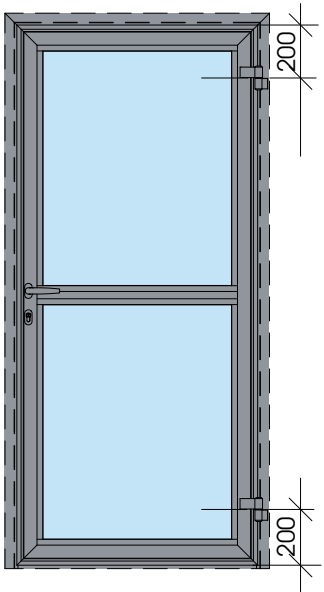


WEIGHT AND DIMENSION LIMITS

Two-leaf hinges

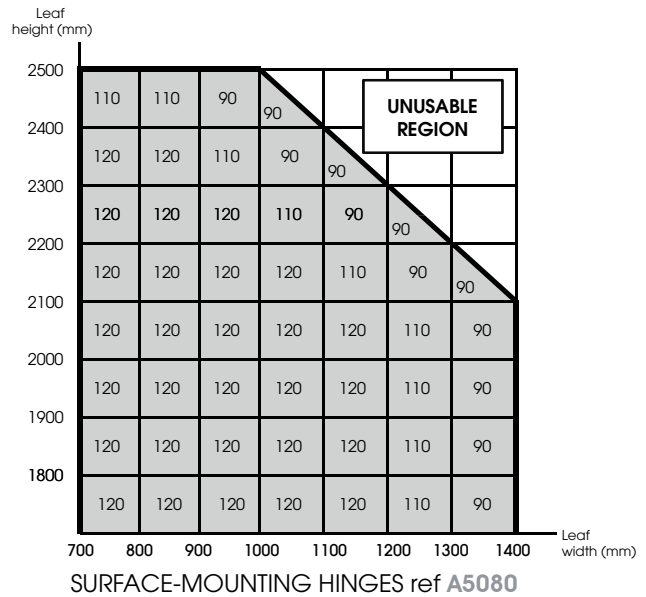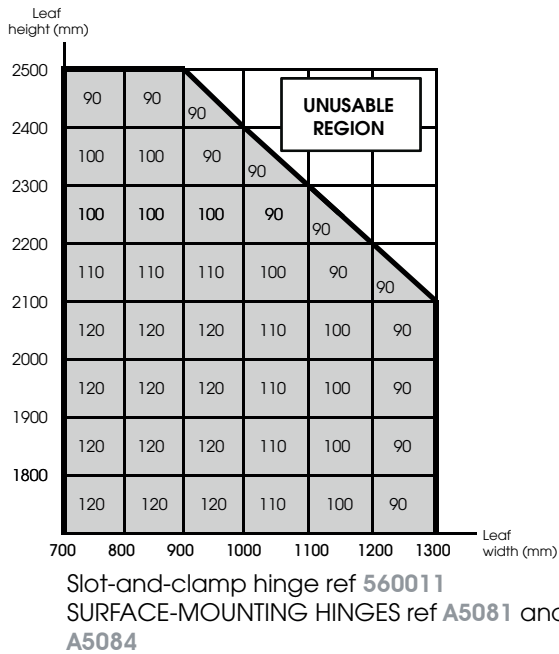


POSITION OF SLOT-AND-CLAMP HINGES

Reference 560011

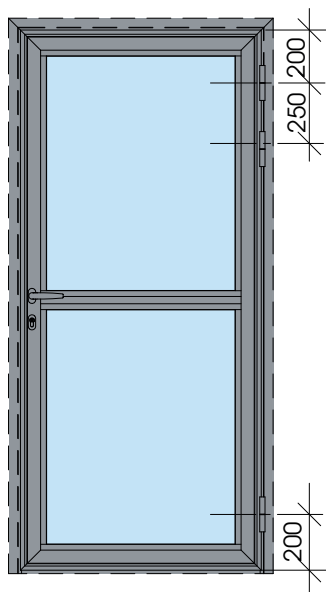

POSITION OF SURFACE-MOUNTING HINGES


Reference A5080

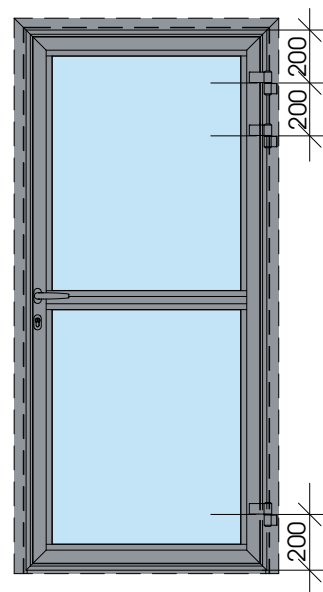


WEIGHT AND DIMENSION LIMITS

Three-leaf hinges

MAX. WEIGHT, KG PER LEAF
WITH 2 x THREE-LEAF HINGES
REF. 560032

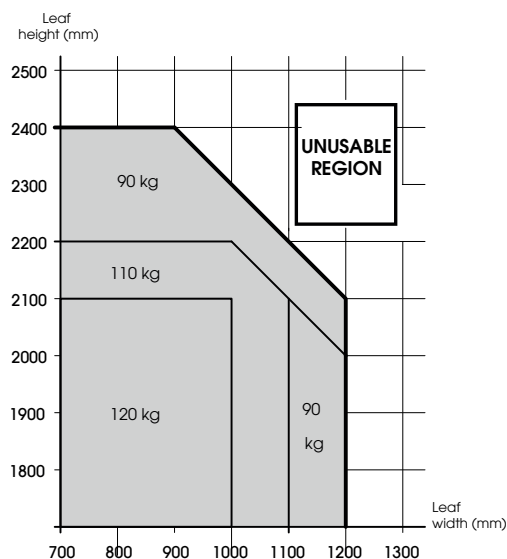


MAX. WEIGHT, KG PER LEAF
WITH 2 x TWO-LEAF HINGES REF. 560011
OR WITH 2 x THREE-LEAF HINGES REF. A5086

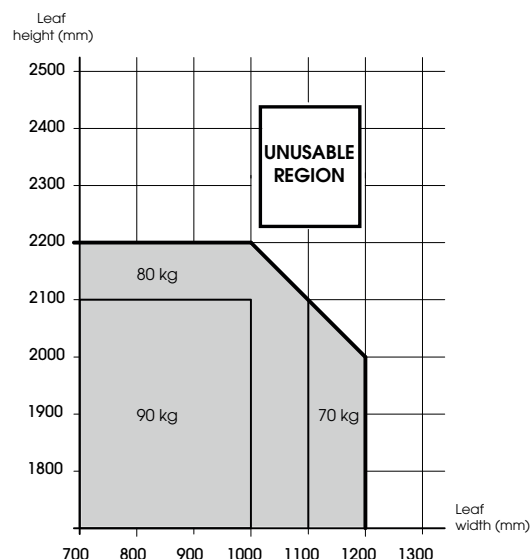


POSITION OF SLOT-AND-CLAMP HINGES

Reference 560032

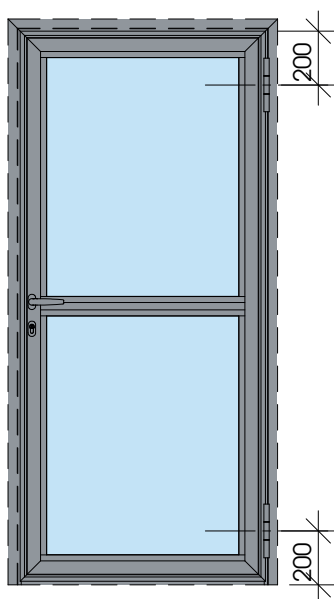

POSITION OF SURFACE-MOUNTING HINGES

Reference A5086

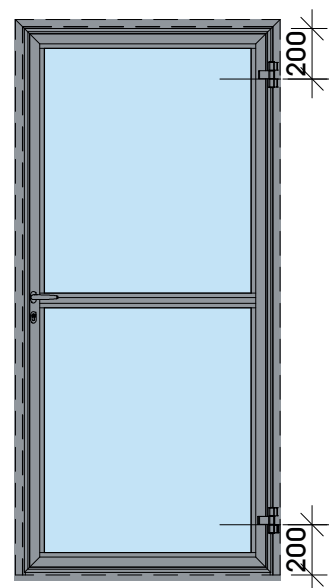


See assembly drawings ref. D5200 and D5201.


WEIGHT AND DIMENSION LIMITS

Three-leaf hinges

MAX. WEIGHT, kg PER LEAF
WITH 3 x THREE-LEAF HINGES
REF. 560032

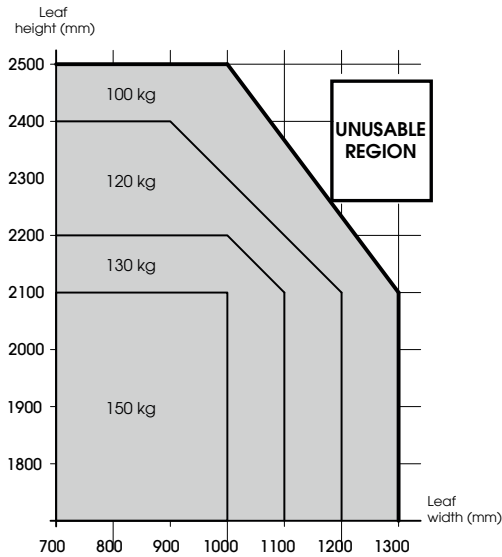


MAX. WEIGHT, KG PER LEAF
WITH 3 x TWO-LEAF HINGES REF. 560011
OR WITH 3 x THREE-LEAF HINGES REF. A5086

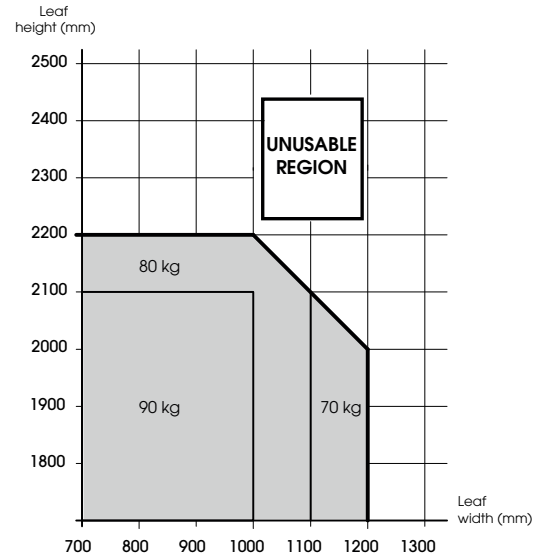


POSITION OF SLOT-AND-CLAMP HINGES

Reference 560032

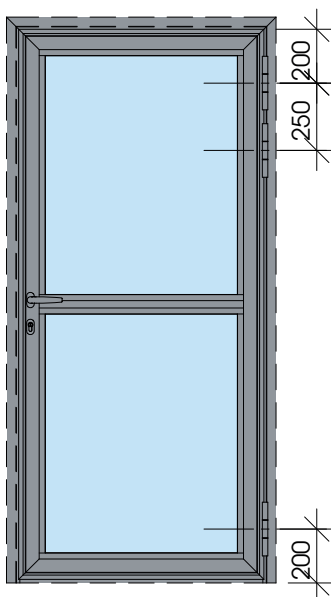


POSITION OF SURFACE-MOUNTING HINGES

Reference A5086

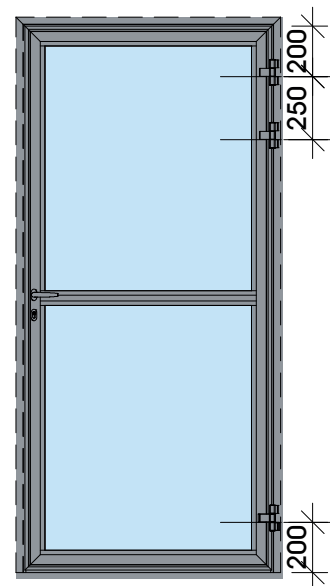

See assembly
drawings ref. D5200
and D5201.

WEIGHT AND DIMENSION LIMITS

Type of opening	Opening frame section	Leaf height (mm)		Leaf width (mm)		Max. weight (per leaf)	Fittings per leaf
		Max.	Min.	Max.	Min.		
Two-way door, one or two leaves 	510012	2400	1800	1000	800	100kg	On cantilever arm ref. 5670, top pivot ref. 5721, and floor pivot ref. 5661
	510012	2500	1800	1300	700	180kg	On cantilever arm ref. 5670, top pivot ref. 5721, floor pivot plate ref. 550077 and closer ref. 550014

LOCK COMPATIBILITY CHART

	LOCKS (main leaf)								ACCESSORIES	
	550018	A5023	A5025	A5027	A5061N	A5062N	A5063N A5065N	A5096	Ref.	Item
	2-point lock, 16mm lock case	1-point lock, 1/2 keyturn	3-point lock with round bolt	3-point lock with roller latch	3-point lock with hook latch	5-point lock with hook latch	Automatic 3-point locks	3-point handle-lift lock		
Single-leaf door		●	● ●	● ●		● ●		●	550040N	Central adjustable strike plate
					●	●		●	550080N	Top & bottom adjustable strike plate kit
					●	●		●	A5088	Continuous strike plate, 3 & 5 points, right adjustable
					●	●	●	●	A5089	Continuous strike plate, 3 & 5 points, left adjustable
					●	●	●	●	A5094	Day access strike plate, right
					●	●	●	●	A5095	Day access strike plate, left
	●								5974	Top strike plate, thickness 10mm
		●	●						550055	Electric strike
	●						●		A5076	Kit motorization: transformer + cables
	●								1828	Locking bar M8
	●								550072	Locking bar guide
	●								550073	Locking bar guide (for kick plate option)
		●	●		●	●	●	●	1862	FLOW paired lever handles, 8mm square spindle
		●	●		●	●	●		+ 1889	Square spindle L=152mm
		●	●		●	●	●	●	450076	ZED paired lever handles, 8mm square spindle
		●	●		●	●	●		+ 1879	Square spindle L=145mm
		●	●		●	●	●	●	450170	INSTALLUX paired lever handles, 8mm square spindle
		●	●		●	●	●		+ 1894	Square spindle L=104mm
		●	●		●	●	●	●	1861	FLOW single lever handle, 8mm square spindle
		●	●		●	●	●	●	450074	ZED single lever handle, 8mm square spindle
		●	●		●	●	●	●	450171	INSTALLUX single lever handle, 8mm square spindle
		●	●		●	●	●		1870	HORUS extra-flat handle
	●			●					560017	Push handle
	●			●					560018	Strip handle
	●			●					560024	Selène single handle
	●			●					560026	Selène paired handles
	●			●					1611	Push handle, height 130mm
	●			●					+ 560020	Installation accessory
	●			●					1641	Tubular push handle, centre distance 350mm
	●			●					+ 1636	Fastening kit
	●			●					1637	Tubular handle fastening kit Ø50mm
	●			●					+ TU50X2	Round tube Ø50
	●			●					1638	Tubular handle fastening kit Ø40mm
	●			●					+ TU40X2	Round tube Ø40
	●	●	●	●	●	●	●	●	550010	Cylinder 45+45, DIN cam, variant keys
	●	●	●	●	●	●	●	●	550011	Cylinder 45+45, DIN cam, common key
	●	●	●	●	●	●	●	●	550012	Cylinder 45+45, DIN cam, variant keys, BT type
	●	●	●	●	●	●	●	●	550013	Cylinder 45+45, DIN cam, common key, BT type
	●	●	●	●	●	●	●	●	550015	1/2 cylinder 45+10, DIN cam, variant keys
	●	●	●	●	●	●	●	●	550016	1/2 cylinder 45+10, DIN cam, common key
	●	●	●	●	●	●	●	●	1827	Pair of keyholes
	●	●	●	●	●	●	●	●	450077	ZED keyhole
	●	●	●	●	●	●	●	●	450172	Square escutcheon
	●	●	●	●	●	●	●	●	5765	Security keyhole

Minimum height of opening frames:

Locks ref. A5025 and A5027 = 1900 mm

Locks ref. A5061N, A5062N and A5096 = 2010 mm

LOCK COMPATIBILITY CHART


	LOCKS (main leaf)								ACCESSORIES	
	550018	A5023	A5025	A5027	A5061N	A5062N	A5063N A5065N	A5096	Ref.	Item
	2-point lock, 16mm lock case	1-point lock, 1/2 keyturn	3-point lock with round bolt	3-point lock with roller latch	3-point lock with hook latch	5-point lock with hook latch	Automatic 3-point locks	3-point handle-lift lock		
2-leaf door		•	•	•				•	550040N	Central adjustable strike plate
			•	•				•	550080N	Top & bottom adjustable strike plate kit
					•	•		•	A5088	Continuous strike plate, 3 & 5 points, right adjustable
					•	•		•	A5089	Continuous strike plate, 3 & 5 points, left adjustable
					•	•	•	•	A5094	Day access strike plate, right
					•	•	•	•	A5095	Day access strike plate, left
	•								5974	Top strike plate, thickness 10mm
		•	•						550055	Electric strike
	•						•		A5076	Drive kit: transformer + cables
	•								1828	Locking bar M8
	•								550072	Locking bar guide
	•								550073	Locking bar guide (for kick plate option)
		•	•	•	•	•	•	•	550037R	Secondary leaf deadbolt kit + adjustable strike plates
		•	•		•	•	•	•	1862	FLOW paired lever handles, 8mm square spindle
		•	•		•	•	•	•	+ 1889	Square spindle L=152mm
		•	•		•	•	•	•	450076	ZED paired lever handles, 8mm square spindle
		•	•		•	•	•	•	+ 1879	Square spindle L=145mm
		•	•		•	•		•	450170	INSTALLUX paired lever handles, 8mm square spindle
		•	•		•	•		•	+ 1878	Square spindle L=127mm
		•	•		•	•		•	1861	FLOW single lever handle, 8mm square spindle
		•	•		•	•		•	450074	ZED single lever handle, 8mm square spindle
		•	•		•	•		•	450171	INSTALLUX single lever handle, 8mm square spindle
		•	•		•	•			1870	HORUS extra-flat handle
	•			•					560017	Push handle
	•			•					560018	Strip handle
	•			•					560024	Selène single handle
	•			•					560026	Selène paired handles
	•			•					1611	Push handle, height 130mm
	•			•					+ 560020	Installation accessory
	•			•					1641	Tubular push handle, centre distance 350mm
	•			•					+ 1636	Fastening kit
	•			•					1637	Tubular handle fastening kit Ø50mm
	•			•					+ TU50X2	Round tube Ø50
	•			•					1638	Tubular handle fastening kit Ø40mm
	•			•					+ TU40X2	Round tube Ø40
	•	•	•	•	•	•	•	•	550010	Cylinder 45+45, DIN cam, variant keys
	•	•	•	•	•	•	•	•	550011	Cylinder 45+45, DIN cam, common key
	•	•	•	•	•	•	•	•	550012	Cylinder 45+45, DIN cam, variant keys, BT type
	•	•	•	•	•	•	•	•	550013	Cylinder 45+45, DIN cam, common key, BT type
	•	•	•	•	•	•	•	•	550015	1/2 cylinder 45+10, DIN cam, variant keys
	•	•	•	•	•	•	•	•	550016	1/2 cylinder 45+10, DIN cam, common key
	•	•	•	•	•	•	•	•	1827	Pair of keyholes
	•	•	•	•	•	•	•	•	450077	ZED keyhole
	•	•	•	•	•	•	•	•	450172	Square escutcheon
	•	•	•	•	•	•	•	•	5765	Security keyhole

Minimum height of opening frames:

Locks ref. A5025 and A5027 = 1900 mm


Locks ref. A5061N, A5062N and A5096 = 2010 mm

RABBETS & GLAZING

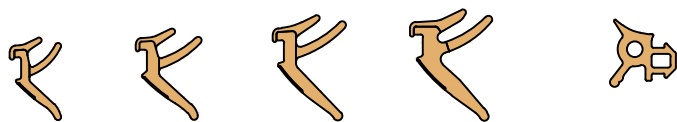


440010 3 mm Grey or black TPE
8629 4 mm Grey or black TPE
440012 5 mm Grey or black TPE
440013 6 mm Grey or black TPE
440001* 4 mm Grey or black TPE
 (always on outside)

Rabbit details









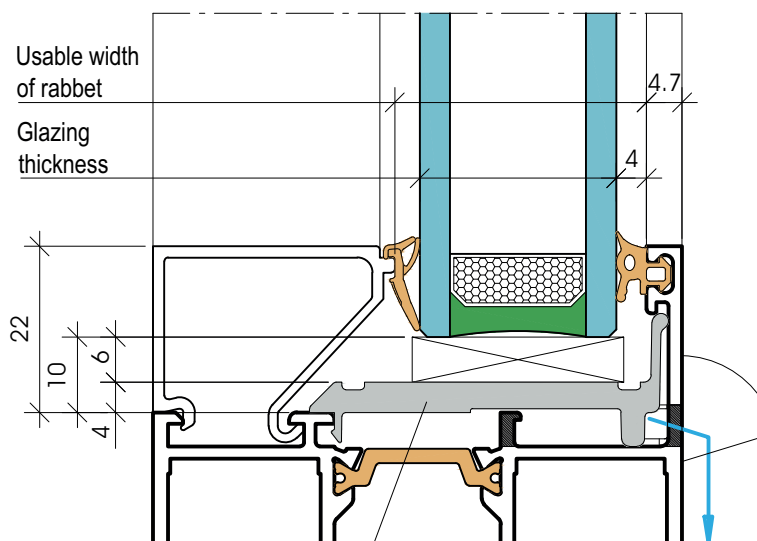


Glazing packer support 560001

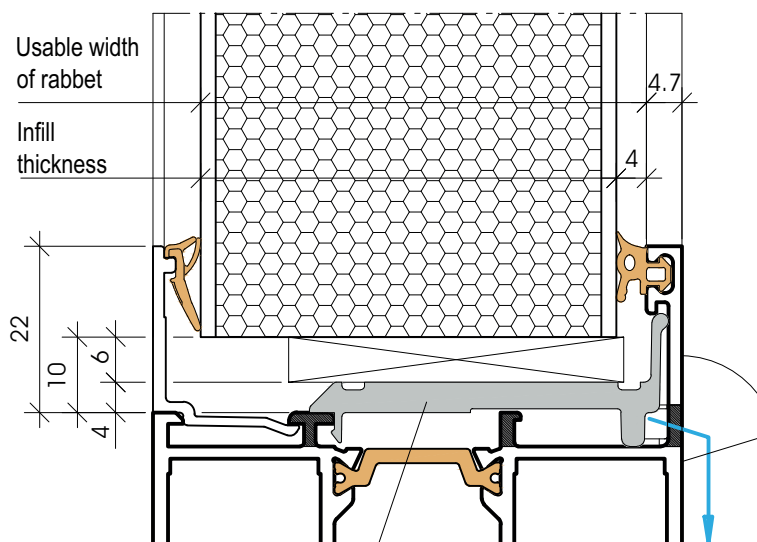

Glazing packer support 560001

This table shows the theoretical seals. The actual rabbit widths should however be checked on fitting. In certain cases, the glazing and section tolerances call for the use of top and bottom seals.


Thickness glazing (mm)	Snap-in gaskets (inside)				Reference glazing beads (width mm)	Usable width of rabbit
	440010	8629	440012	440013		
8				●	420063 Width 47 	18.3mm
9			●			
10		●				
11	●				420030 - 420033 420036 - 420040 Width 32 	33.3mm
23			●	●		
24			●			
25		●			420031 - 420034 420037 - 420041 Width 29 	36.3mm
26			●	●		
27			●			
28		●			420032 - 420035 420038 - 420042 Width 26 	39.3mm
29			●	●		
30			●			
31		●			420166 Width 23 	42.3 mm
32			●	●		
33			●			
34		●			420164 Width 18.5 	46.8mm
35	●					
36			●	●		
37			●		420039 Width 14 	51.3mm
38		●				
39	●					
41			●	●	420068 Width 10 	55.3mm
42		●				
43		●				
44	●				420064 Width 3 	62.3mm
45			●	●		
46		●				
47		●				
48	●					
52			●	●		
53		●				
54		●				
55	●					

*External seal ref. **440001** is run all the way around the perimeter, without cutting in the corners, starting at the middle of the top rail and ending in a splice made with glue ref. **40080**.


PANIC LATCH INSTALLATION LAYOUTS

Door, single leaf


1 point

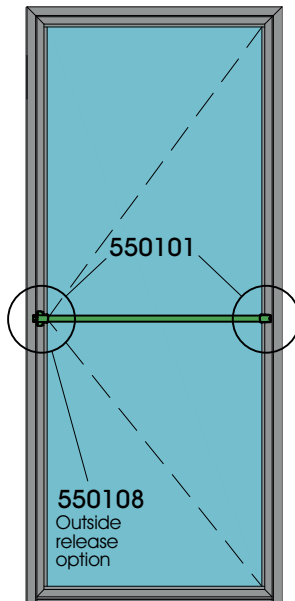

2 or 3 points
top and bottom

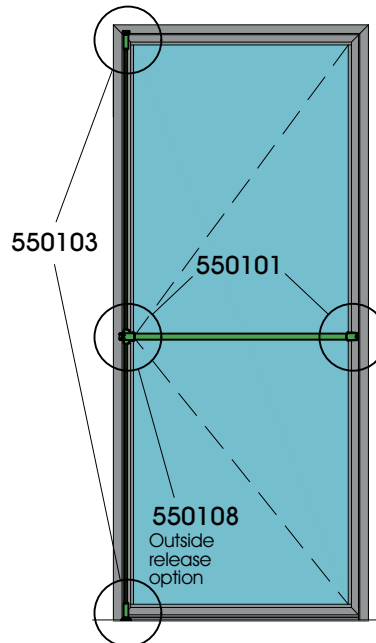


2 or 3 points
at side

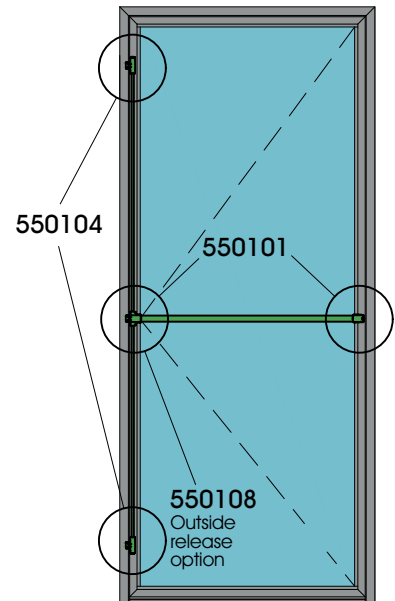

Door, 2 leaves


2 points top and bottom
secondary leaf

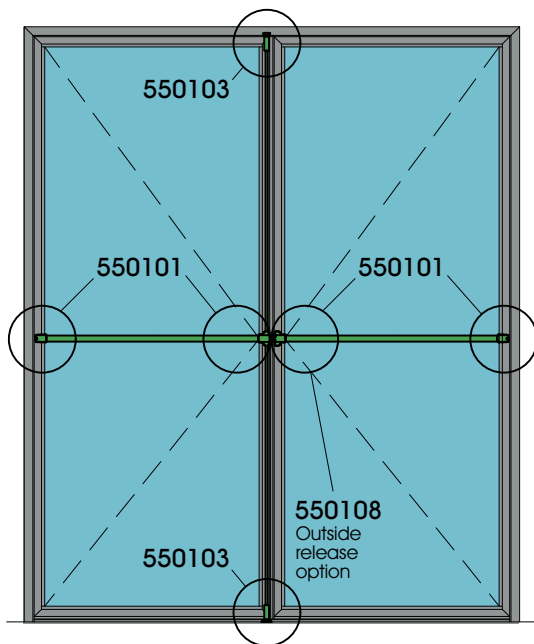

1 point
main leaf

2 points top and bottom
secondary leaf

2 or 3 points at side
main leaf






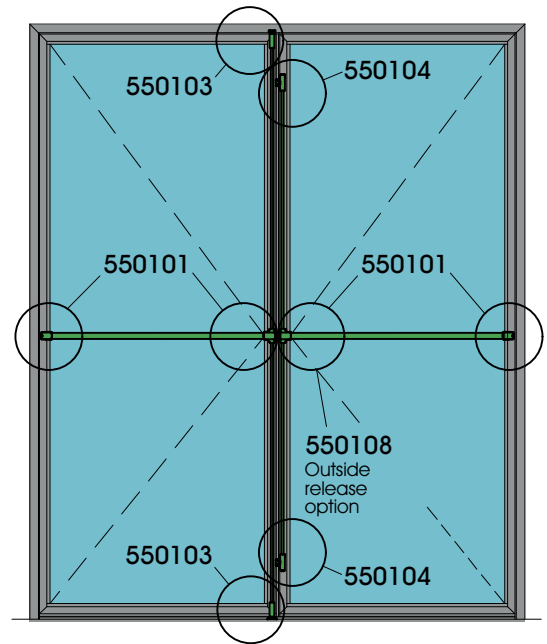


See our panic bolt implementation drawings:




Single-leaf mitre cut door : **D5205f**
 Single-leaf door with kick plate : **D5215**
 Two-leaf mitre cut door : **D5216**
 Two-leaf door with kick plate : **D5217**

DOOR LOCK SUMMARY TABLE





Our new offer is presented in the tables below by associating the locks with the adjustable strikes

SINGLE-POINT LOCKS	STRIKE PLATE SEMI-FIXED BOLT	THREE-POINT LOCKS	STRIKE PLATE SEMI-FIXED BOLT	TWO-POINT LOCK
 A5023 Single-point lock	 550040N Adjustable centre strike plate  550037R Semi-fixed bolt kit + adjustable strike plates	 A5025 Three-point lock with round bolts  A5027 Three-point lock with roller latch	 550040N Adjustable centre strike plate  550080N Top and bottom adjustable strike plates  550037R Semi-fixed bolt kit + adjustable strike plates	 550018 Two-point lock (single action APD, double action, inde- pendent leaves)


SECURITY LOCK SUMMARY TABLE

THREE-POINT LOCKS			STRIKE PLATES		
					
A5061N Lock with three-point hook latch	A5062N Lock with five-point hook latch	A5096 Three-point handle-lift lock	550040N Adjustable centre strike plate	550080N Top and bottom adjustable strike plates	550037R Semi-fixed bolt kit + adjustable strike plates
					
					
					
					

AUTOMATIC SECURITY LOCK (WITH OR WITHOUT ACTUATOR) SUMMARY TABLE

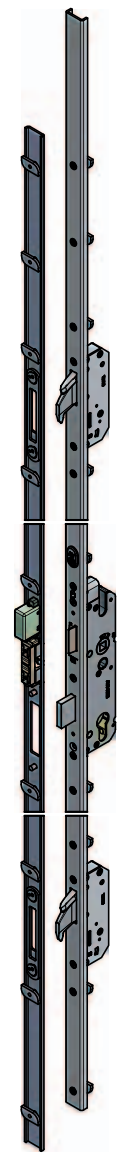THREE-POINT LOCKS + CONTINUOUS STRIKE PLATES	STRIKE PLATES	DRIVE UNIT
  A5063N Three-point automatic handle-lift lock, right, with adjustable continuous strike plate	  A5094 Daytime latch, right   A5095 Daytime latch, left  550037R Semi-fixed bolt kit + adjustable strike plates	 A5076 Drive kit: transformer + cables

MOTORIZATION KIT REF. A5076 WITH BIOMETRIC READER REF. 560048
USE WITH AUTOMATIC LOCKS REF. A5063N AND A5065N

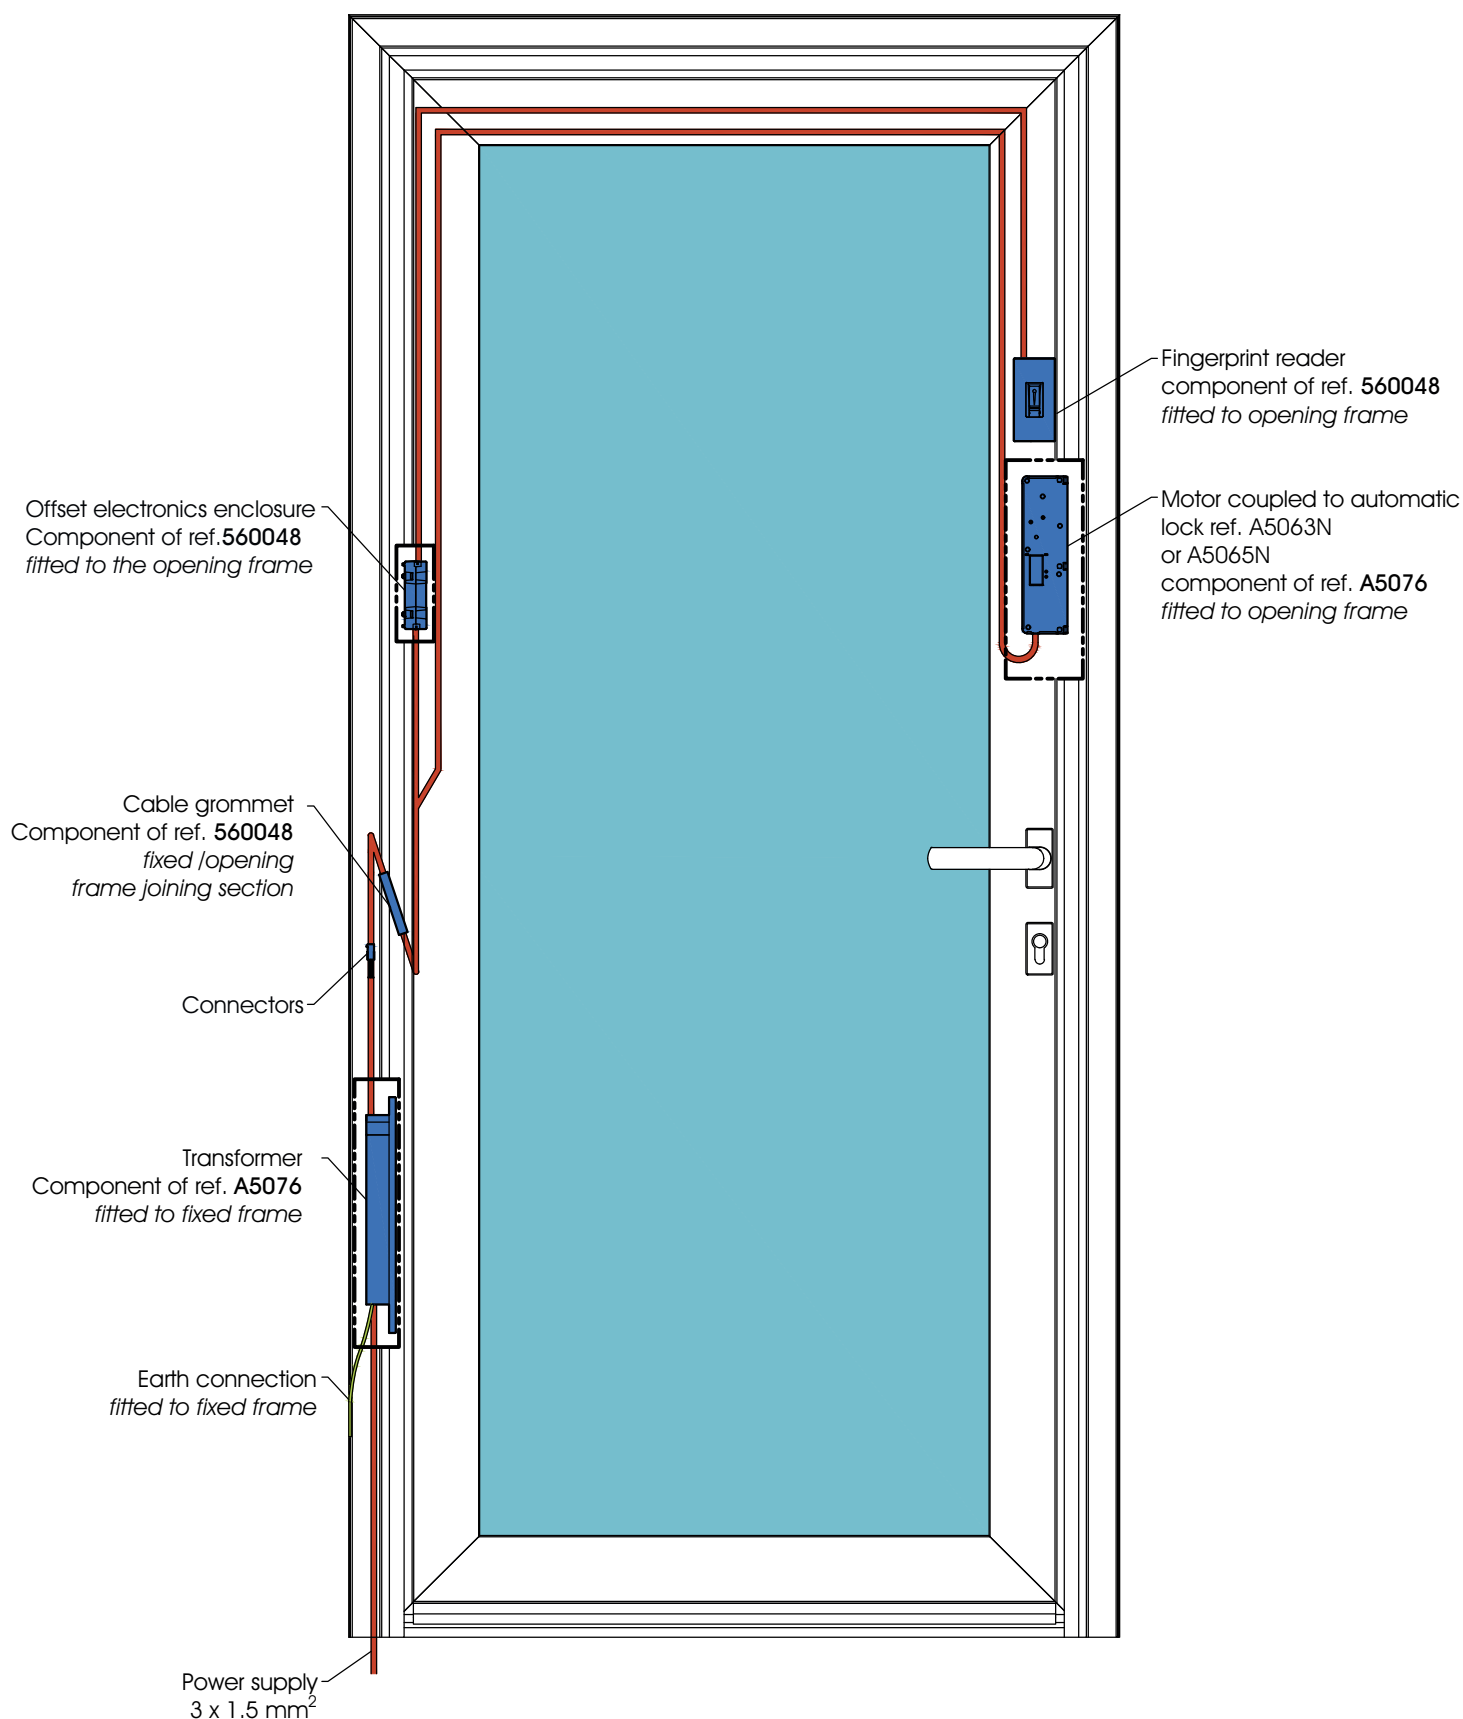

See our manufacturing drawing ref. D5208 index f

HANDLE RANGE

PAIRED HANDLES					
Handle reference		Item	Spindle reference		Item
	1862	FLOW paired lever handles, 8mm square spindle		1889	Lever handle square spindle length 152mm
	450076	ZED paired lever handles, 8mm square spindle		1879	Lever handle square spindle length 145mm
	450170	INSTALLUX paired lever handles, 8mm square spindle		1894	Lever handle square spindle length 104mm


SINGLE HANDLES		
Reference	Item	
	1861	FLOW single lever handle, 8mm square spindle, right or left
	450074	ZED single lever handle, 8mm square spindle, right or left
	450171	INSTALLUX single lever handle, 8mm square spindle,
	1870	HORUS flat lever handle, 8mm square spindle (handle not compatible with refs. 1862 and 450076)

ESCUTCHEONS		
Reference	Item	
	1827	Pair of keyholes
	5765	Safety escutcheon
	450077	ZED escutcheon
	450172	Square escutcheon

* When cutting the square spindle to length, the same amount must always be taken off each end.


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
510000	460034	460034 + 460002	5282		1.669	386	14.15	27.20
510001	460034	460034 + 460002	5282		1.63	360	13.50	27.30
510013	460034	460034+460002			1.472	331	8.43	25.46
510015	460034	460034+460002			1.504	357	8.9	25.34

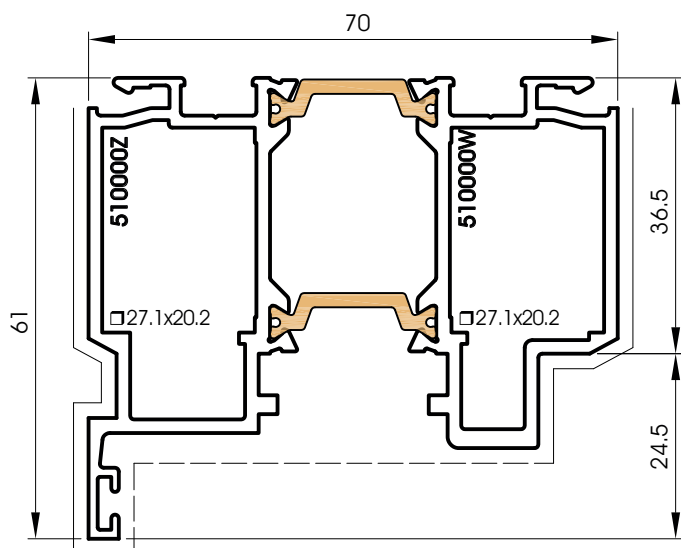


510000

36.5 mm fixed frame with snap-in groove

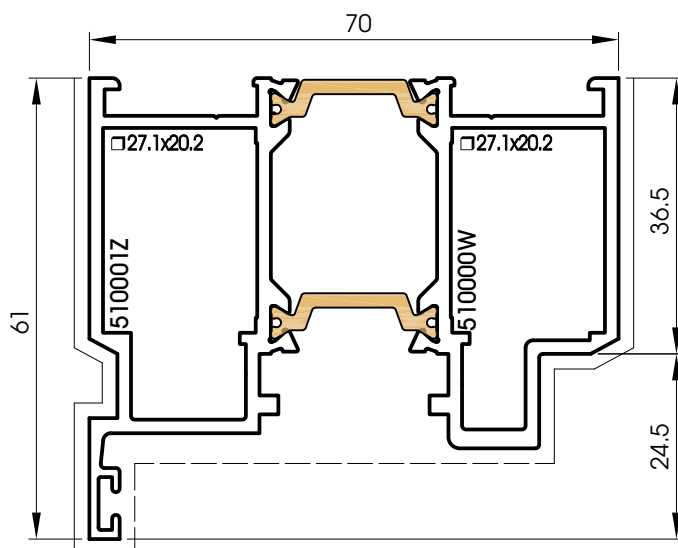


510001

36.5 mm fixed frame with flat bottom

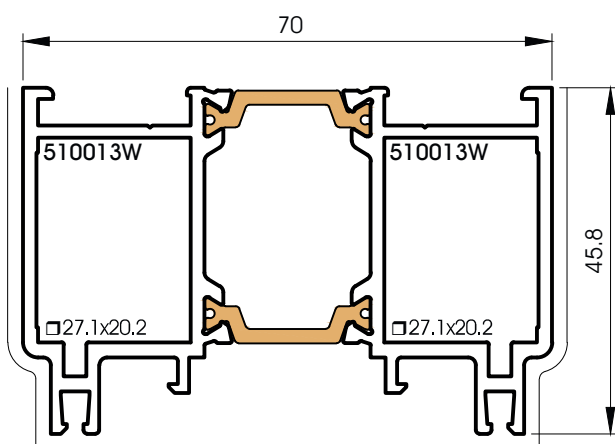

510013

Nip-guard fixed frame

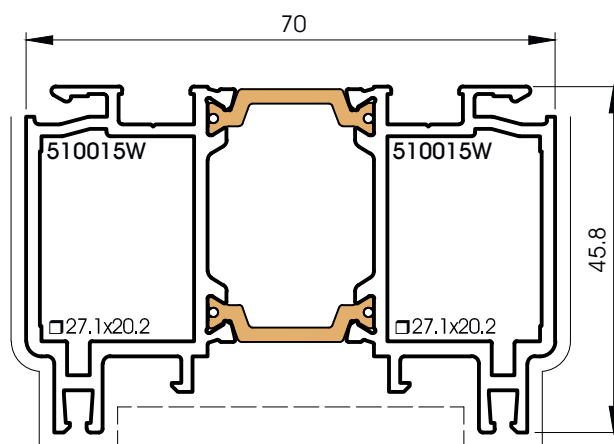


510015

Fixed frame for two-way opening

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410004	460034	460034+460002	460000		1.55	466	14.72	29.16
510004	460034	460034 + 460002	460000	560022 + 460002	1.445	389	10.9	24.99
510005	460034	460034 + 460002	460000	560022 + 460002	1.411	363	10.39	25.1
510010	460034	460034+460002	460000	560022+460002	1.429	376	10.65	25.01

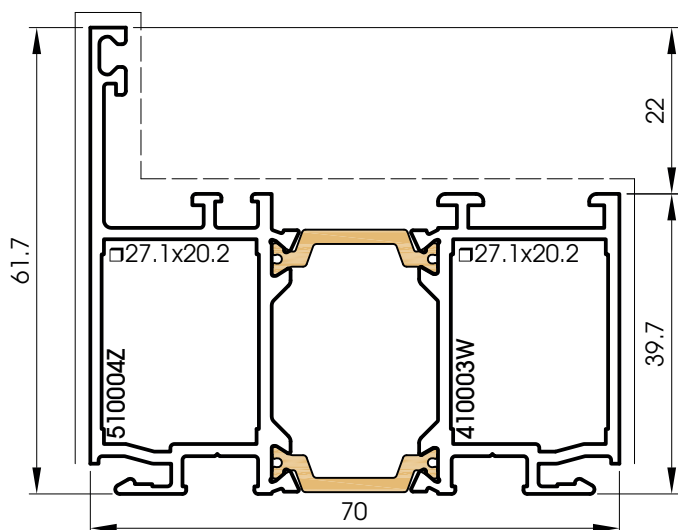


510004

39.7 mm fixed frame with snap-in groove

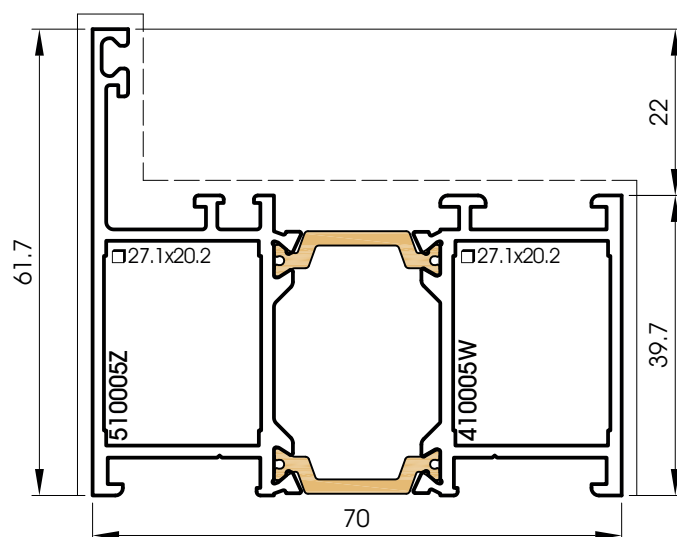


510005

39.7 mm fixed frame with flat bottom

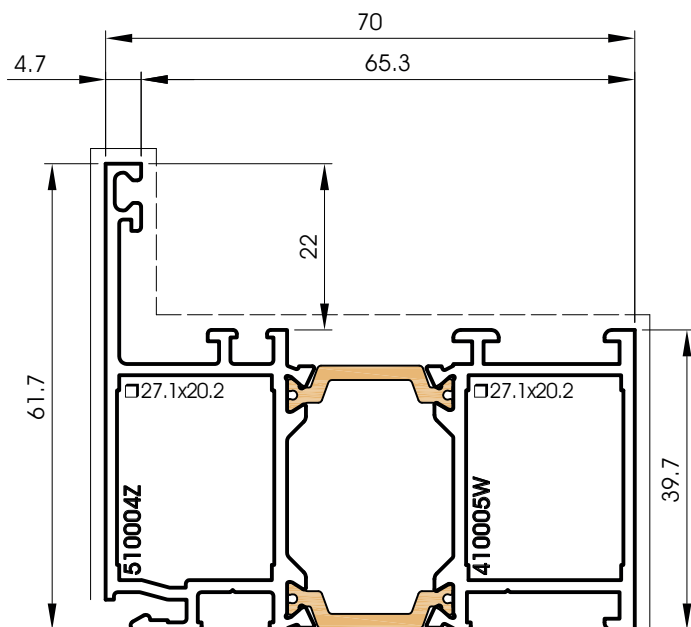

510010

39.7 mm fixed frame, mixed types

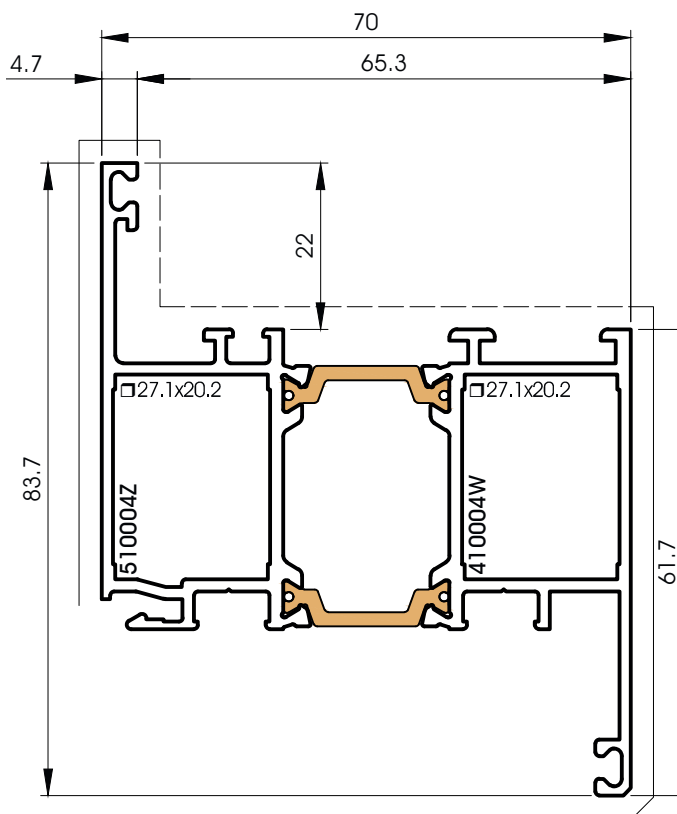


410004

Fixed frame head with drop plate

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
510006			5282		1.339	303	6.34	20.92
510007			5282		1.322	299	6.32	19.46
510014	460033+460034	460033+460034+460002			1.385	300	6.63	21.81

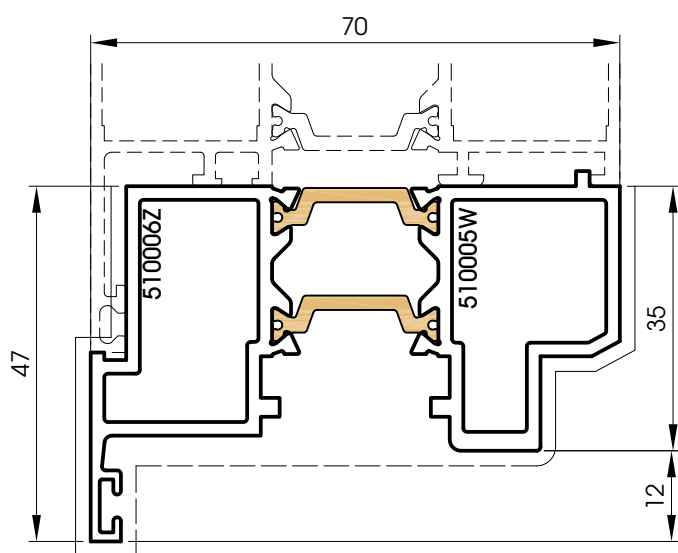


510006

Add-on stop rabbet, inward opening

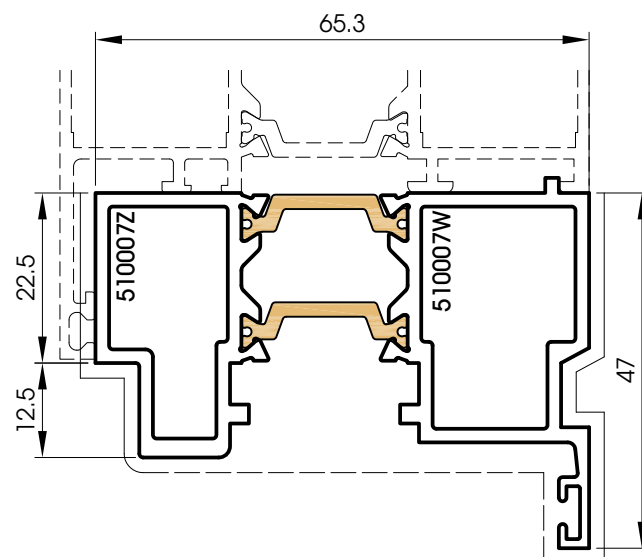

510007

Add-on stop rabbet, outward opening

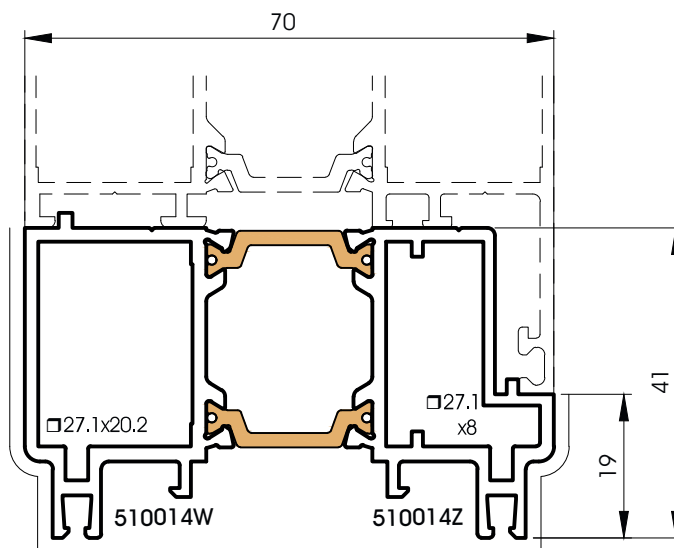


510014

Add-on stop rabbet, two-way opening

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
513006					1.518	326	11.27	21.92
513007					1.706	336	17.49	24.11

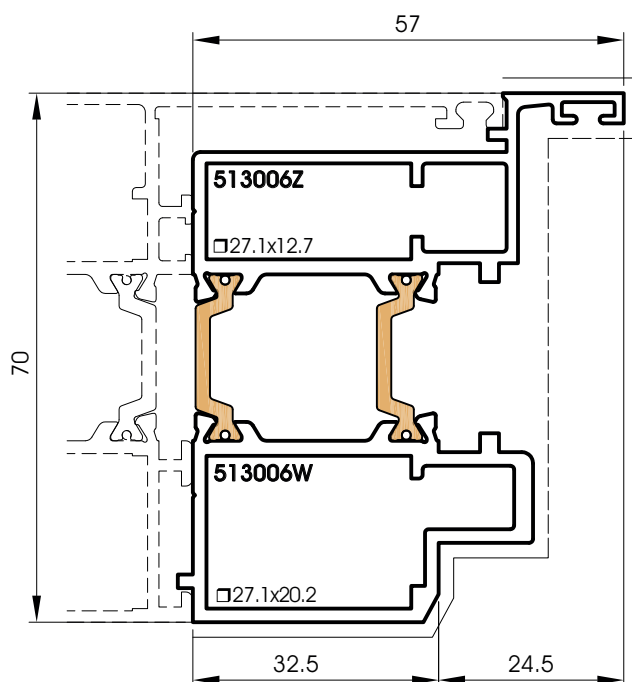

513006

Add-on stop rabbet,
inward opening COMETE 70TH

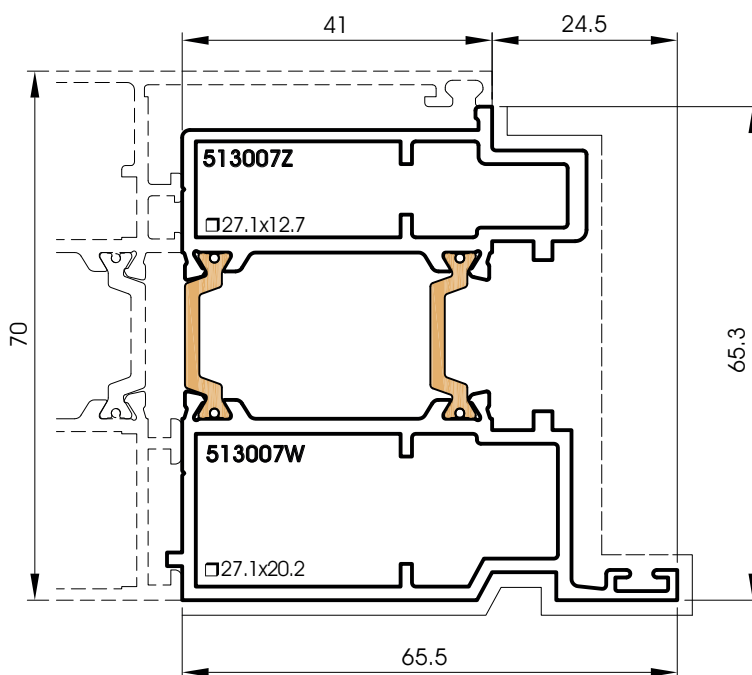




513007

Add-on stop rabbet,
outward opening COMETE 70TH

— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410031	460004	460004+460002	460001	460012+460001(2)	1.361	424	7.97	24.37
410032	460004	460004+460002	460001	460012+460001(2)	2.143	537	11.16	89.06
410074				560022	1.662	449	15.80	30.10

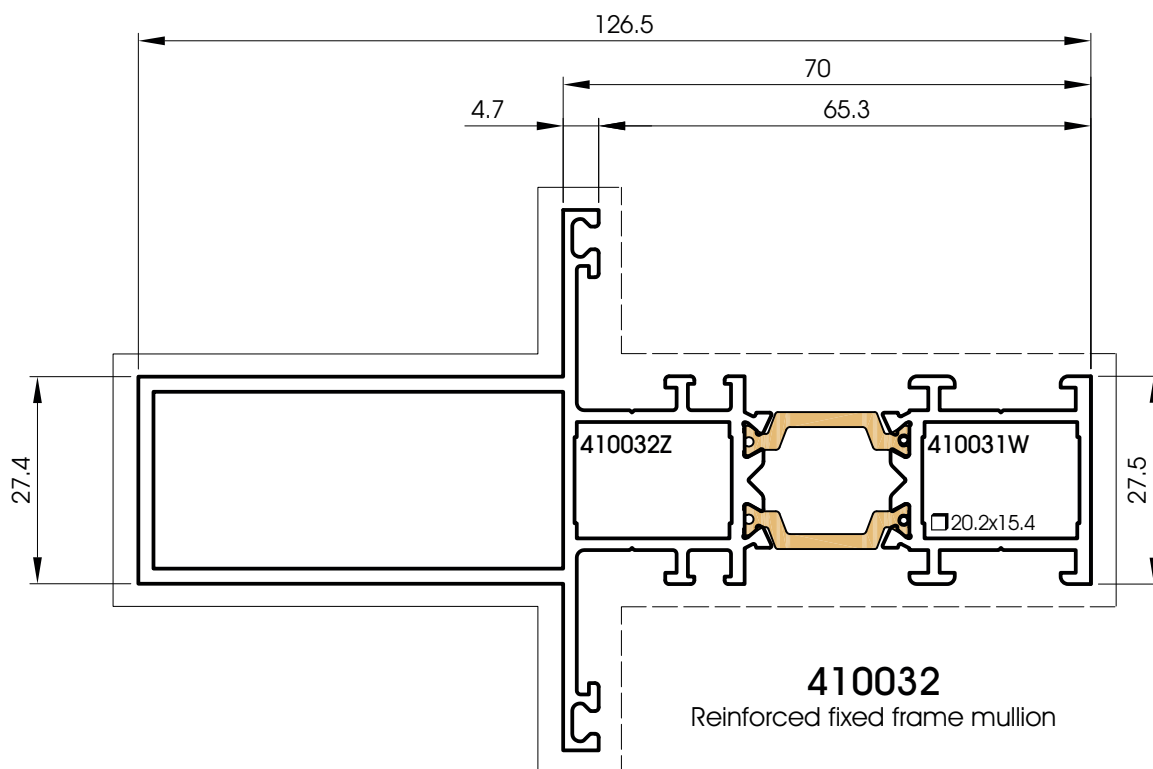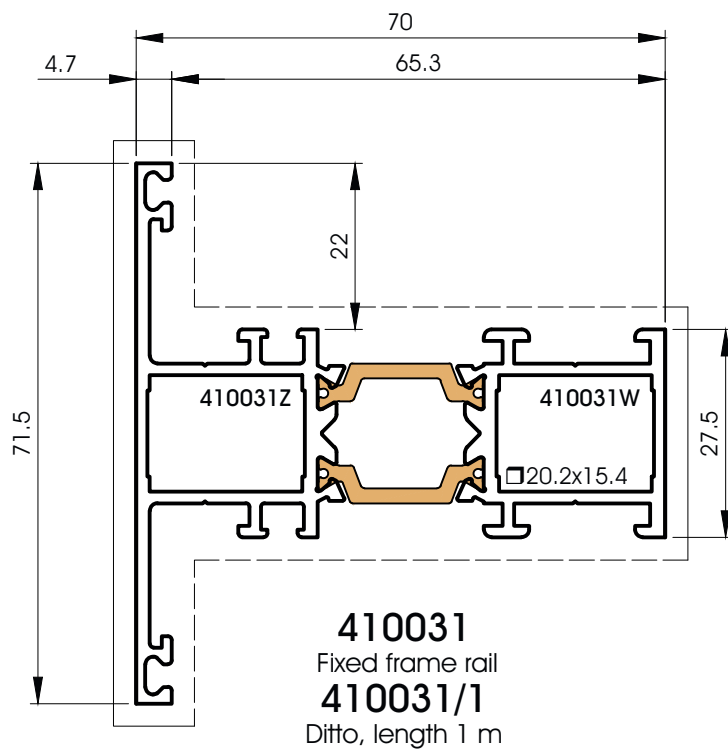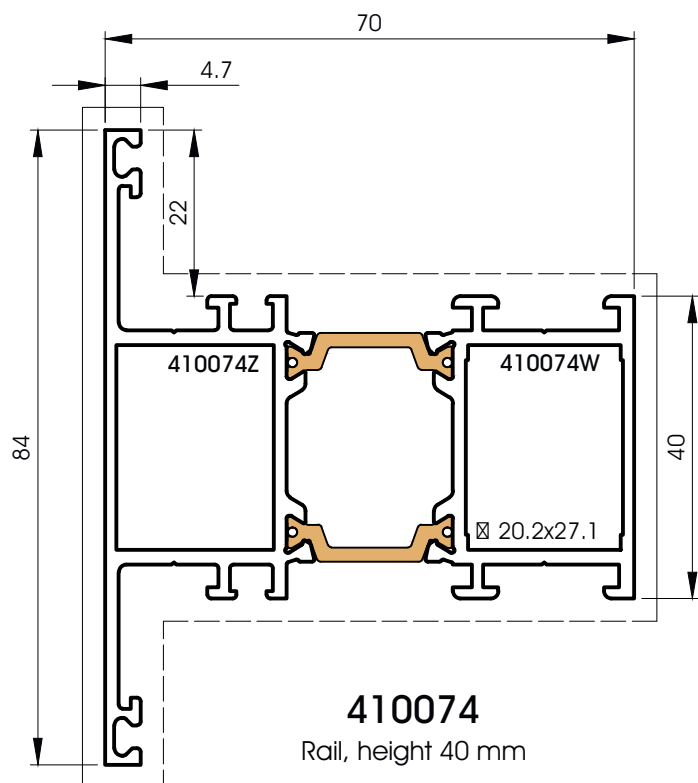

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410033			460001	460008+460001(2)	2.149	515	53.66	39.55

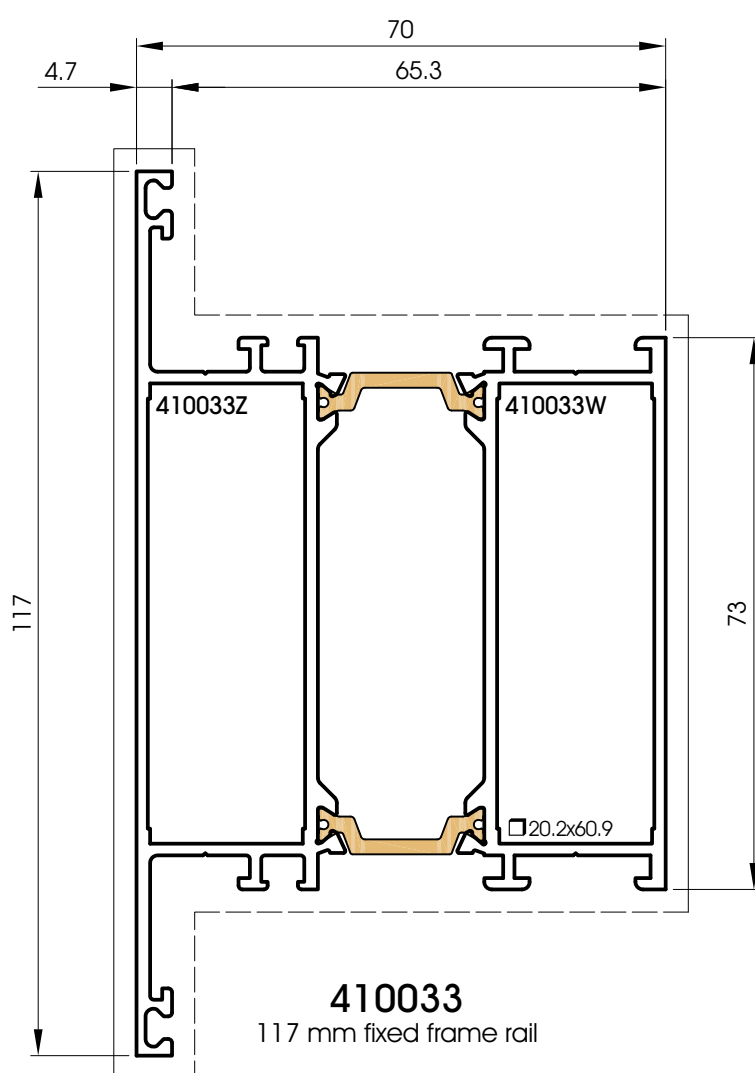

SECTIONS - Scale 1:1



Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	lxx (cm4)	lyy (cm4)
410034			460001	460008+460001(2)	3.24	627	82.44	157.33

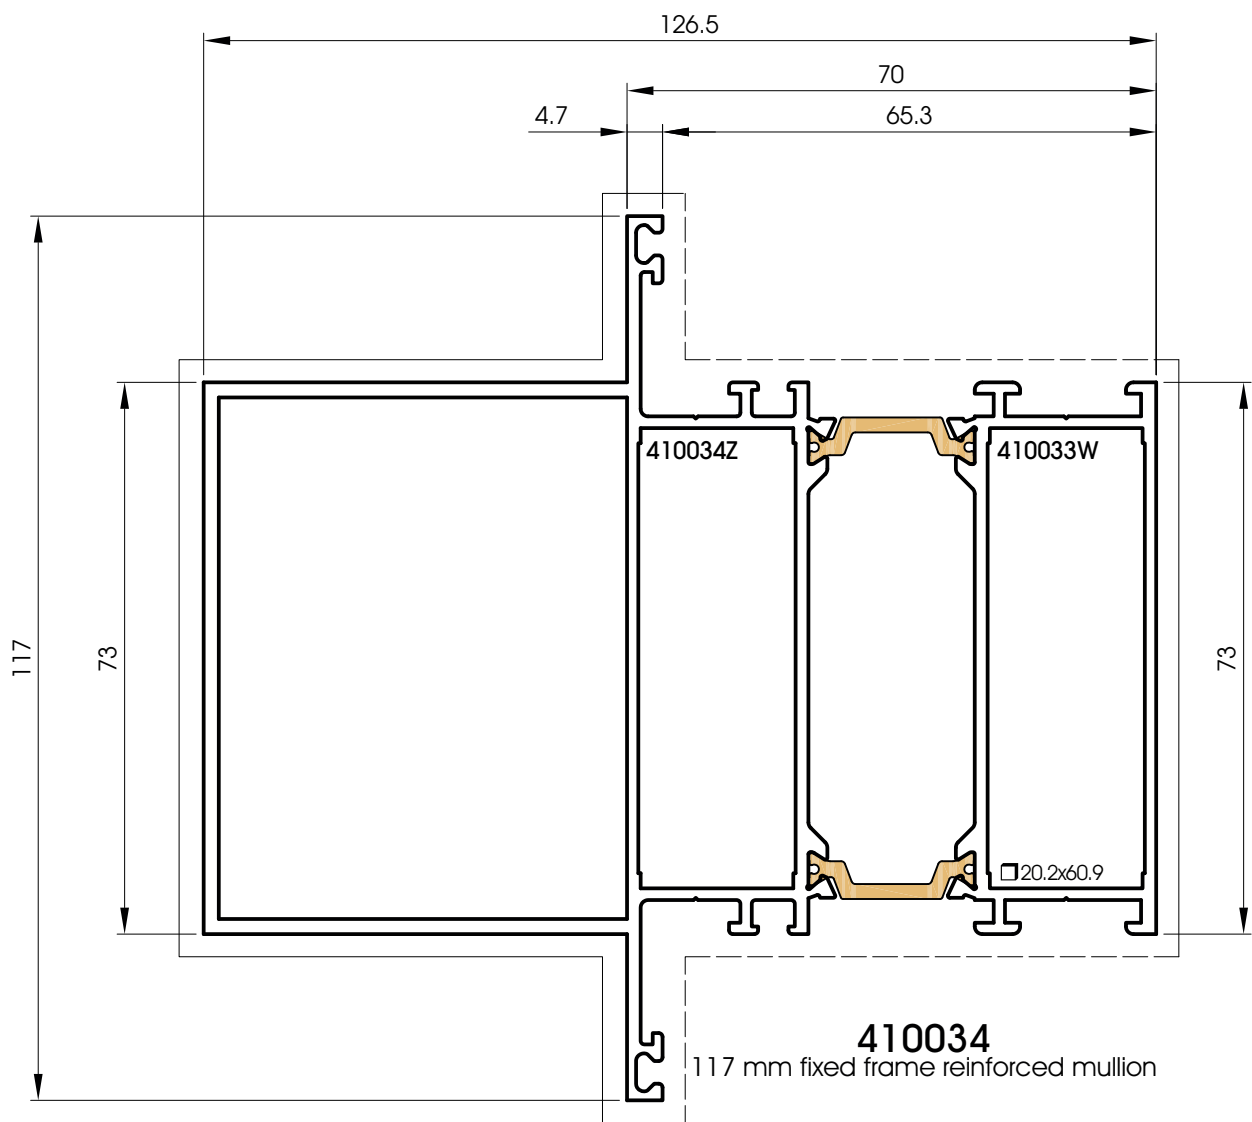

— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410036			460001	460012+460001(2)	3.619	617	207.76	68.26
420062					1.713	94		

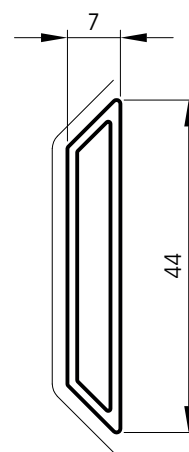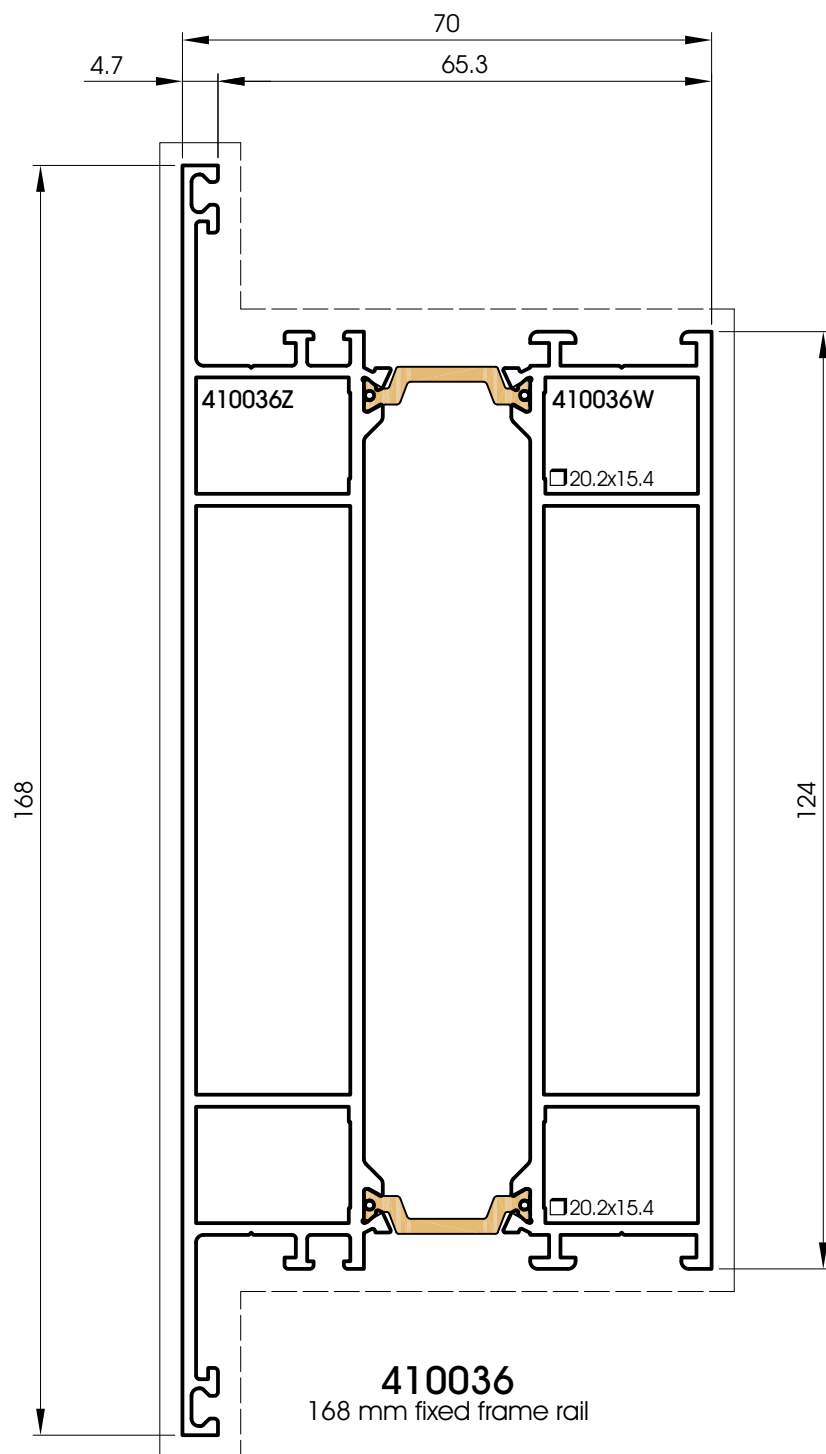


420062
"Petit bois" decorative strip

— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410037	460001	460001+460002	460000	460008+460001(2)	4.229	655	97.94	295.61

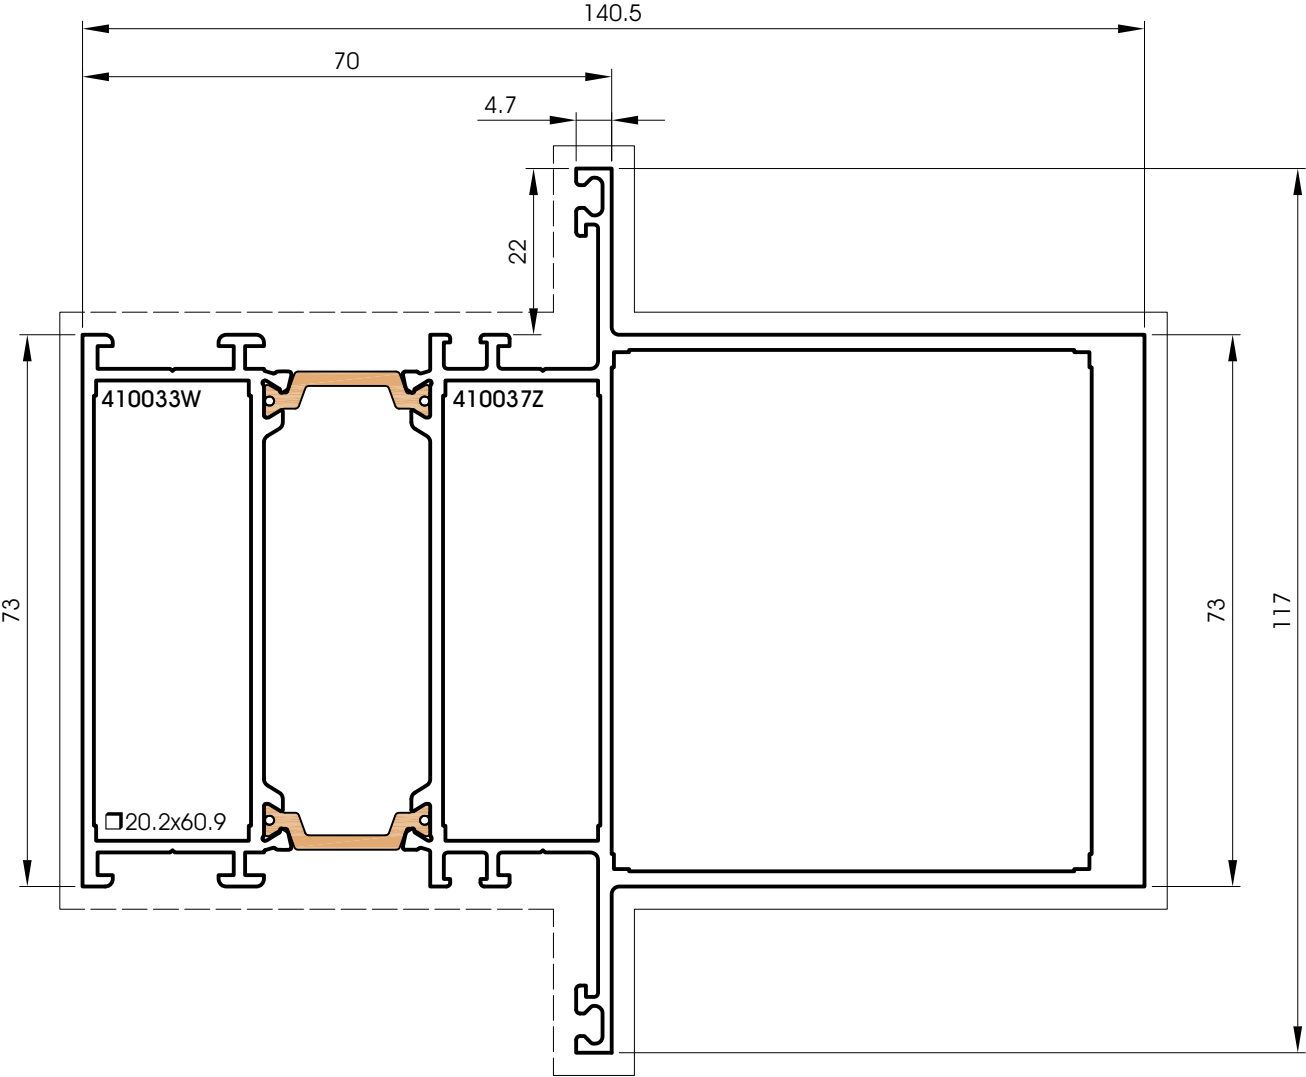


410037

Reinforced fixed frame mullion
width 140.5 mm


— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Order periphery (mm)	lxx (cm4)	lyy (cm4)
510002	560023 or 560000	560023+5248 or 560000+460002	460000		2.211	481	35.55	40.85
510003	560023 or 560000	560023+5248 or 560000+460002	460000		2.211	481	35.55	39.85

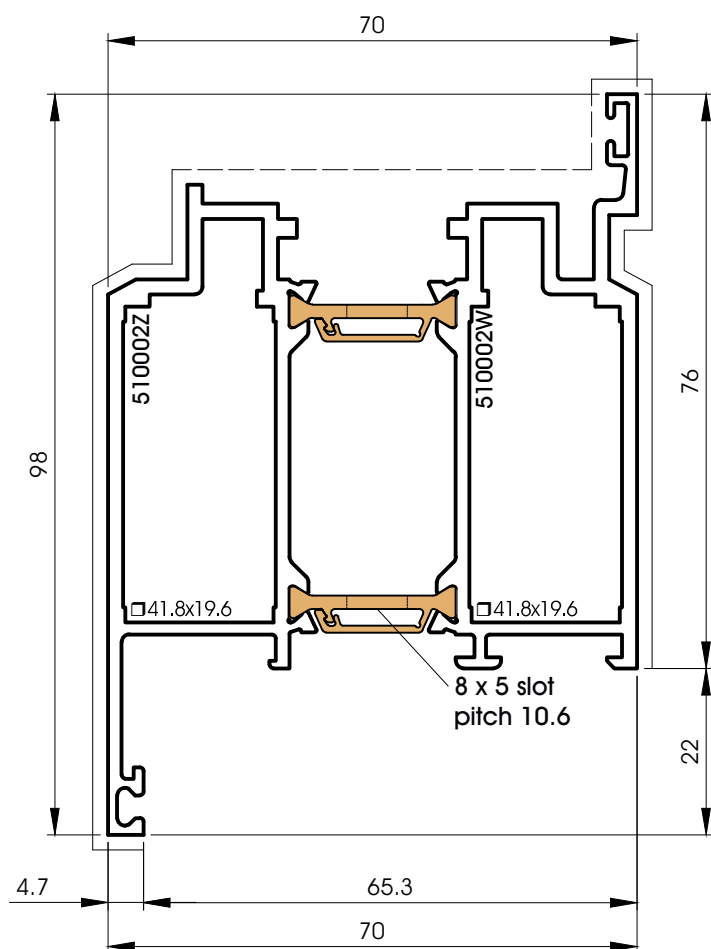

510002
Inward opening

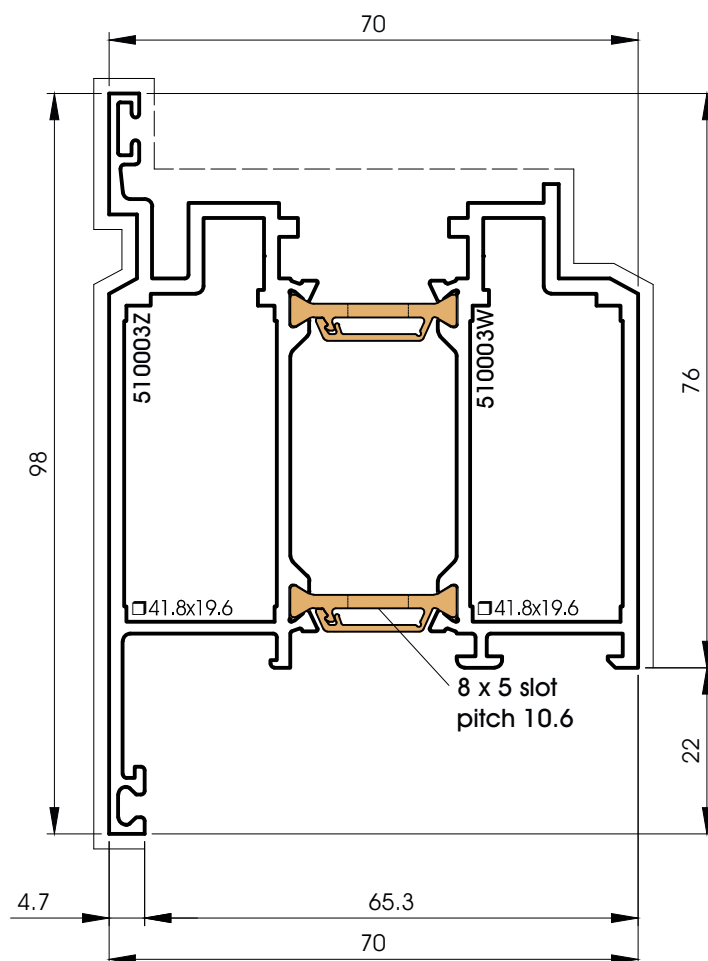


510003
Outward opening


— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Order periphery (mm)	Ixx (cm4)	Iyy (cm4)
510012	560023 or 560000	560023+5248 or 560000+460002			2.414	504	50.7	46.25

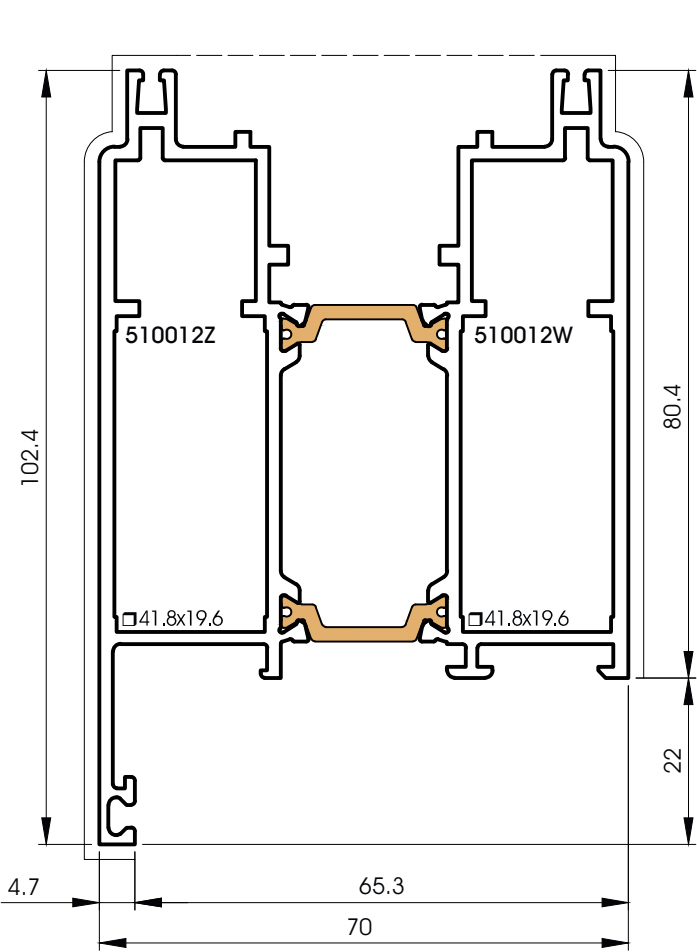

510012
Nip-guard opening frame

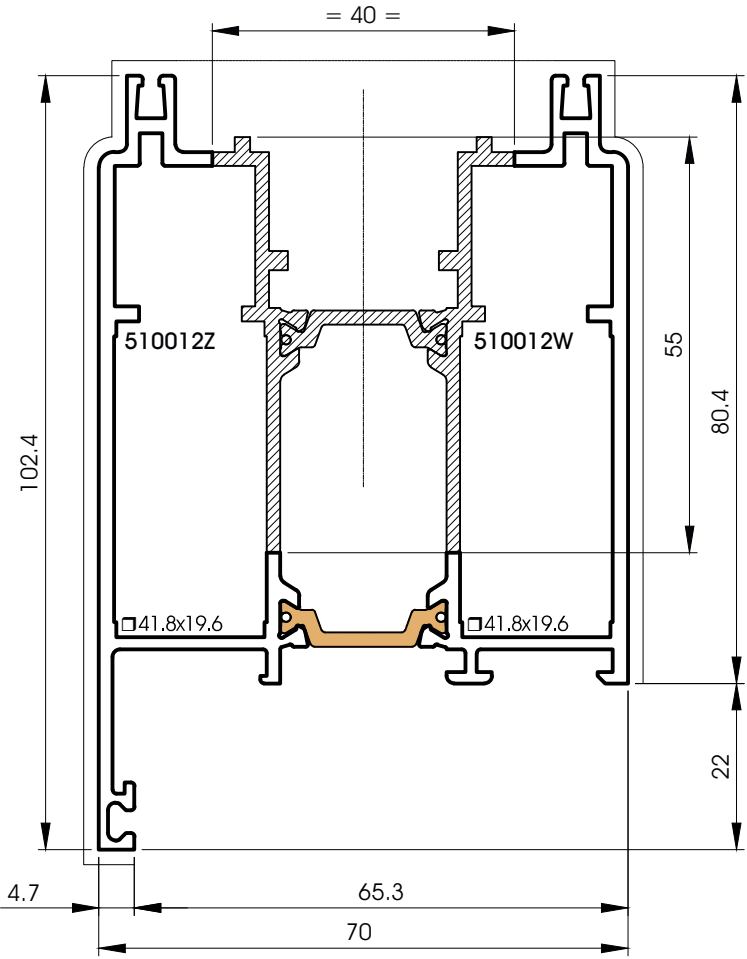


510012U
Machined opening for door closers

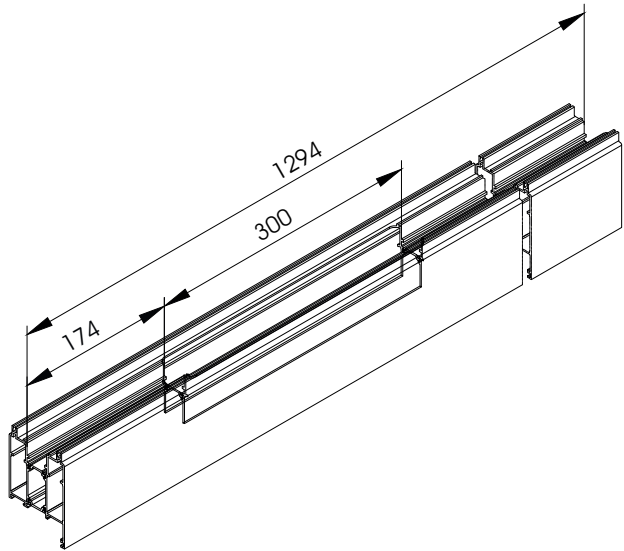

— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
520010					0.836	342	22.92	5.85

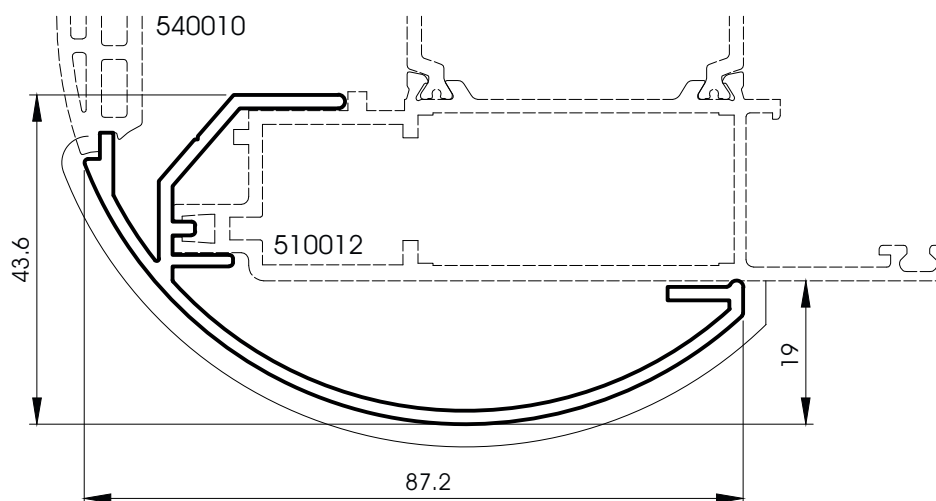


520010
Stile nip-guard

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	lxx (cm4)	lyy (cm4)
510008			460001	460012 + 460002	3.684	561	207.15	64.55
520013					0.493	126	1.74	1.05

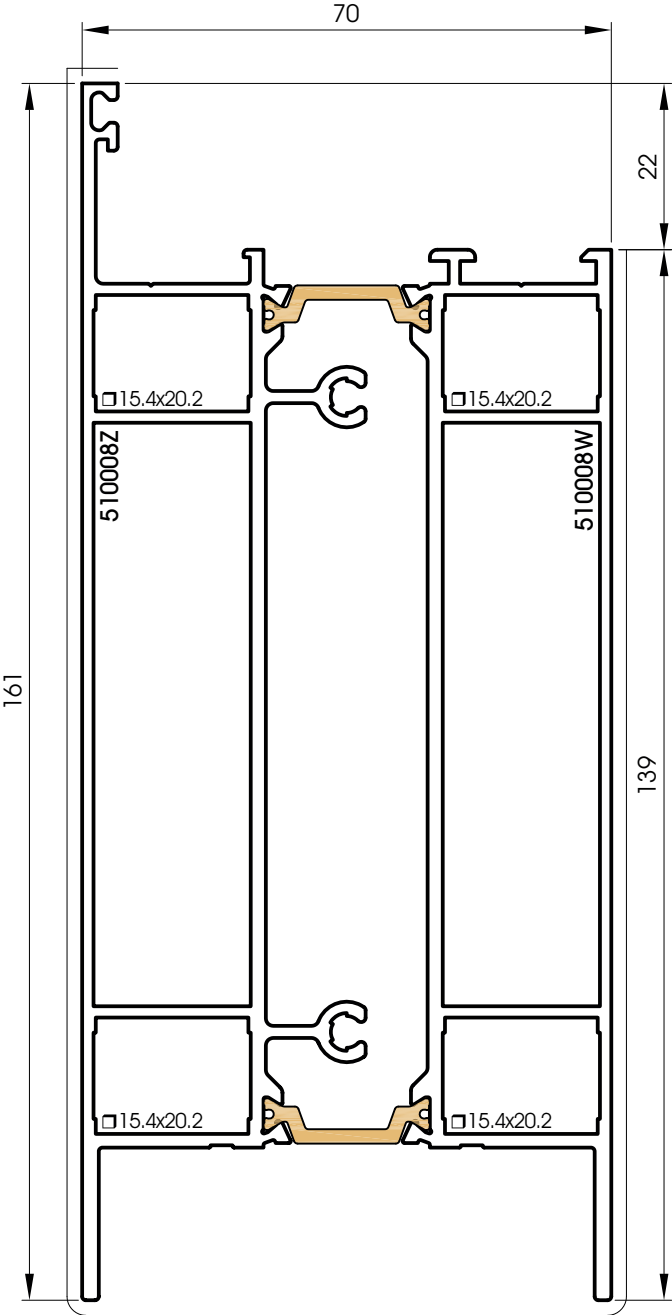

510008
Square-cut kick plate
510008/1
length 1m

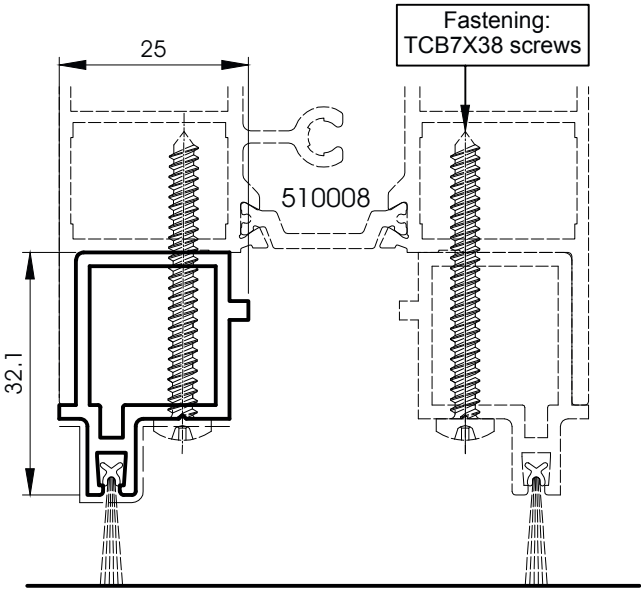


520013
Brush seal section for kick-plate ref. 510008

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
520002					0,31	156	0,17	1,42
520005					0.139	90	0.19	0.06
520012					0.192	116	0.2	0.34

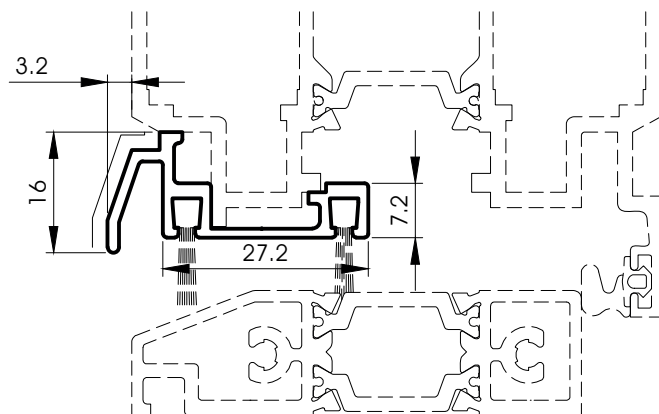


520002

Weather bar for opening frame edge

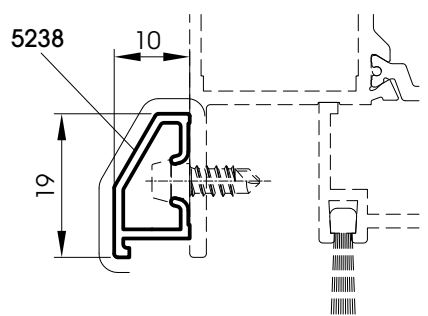


520005

Weather bar for kick-plate

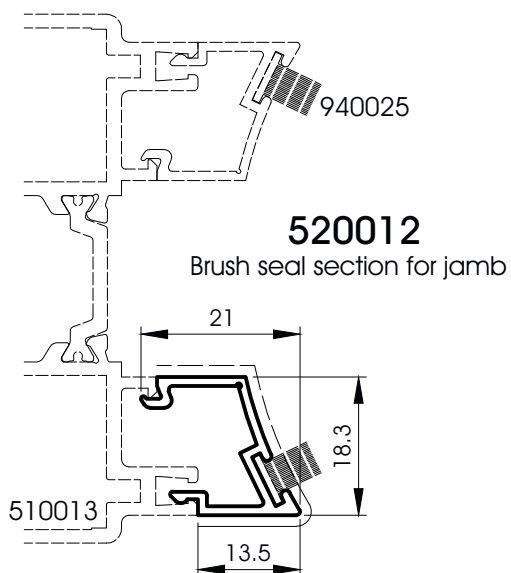

520012

Brush seal section for jamb




5437


Brush-strip holder
(PVC)

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
510009					0.849	160	0.67	9.18
510034					0.891	155	0.69	8.72
520008					0.827	173	0.81	11.29
520015					0.892	150	1.06	12.53
620000					0.747	272	0.15	18.45

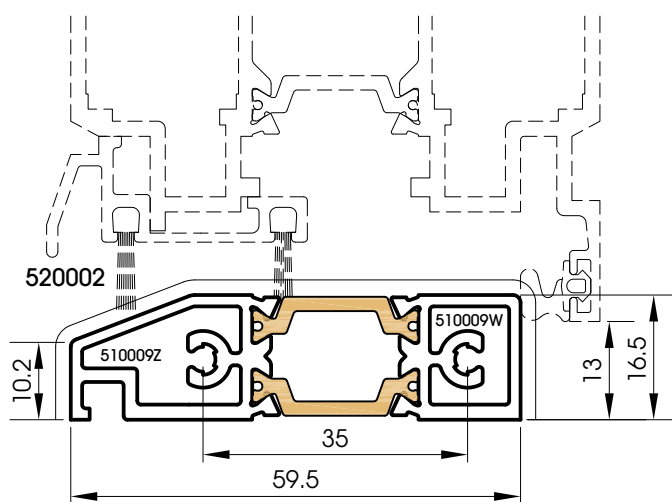


510009
Sill with thermal break

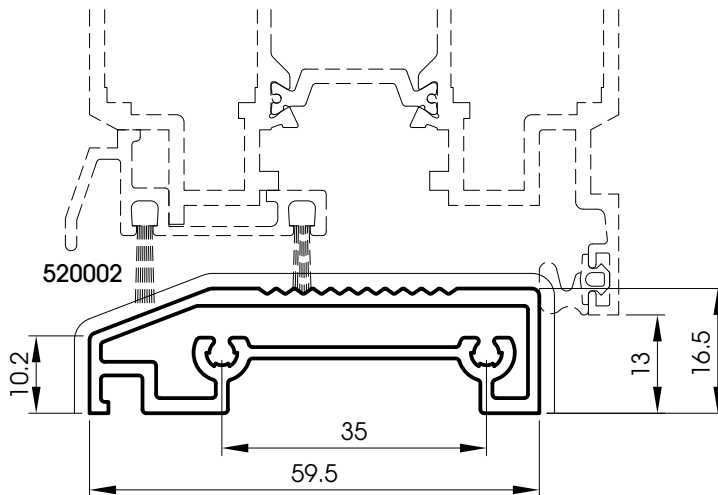


520008
Standard sill

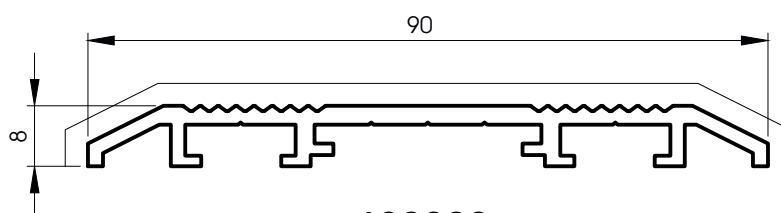

620000
90 x 8 Threshold

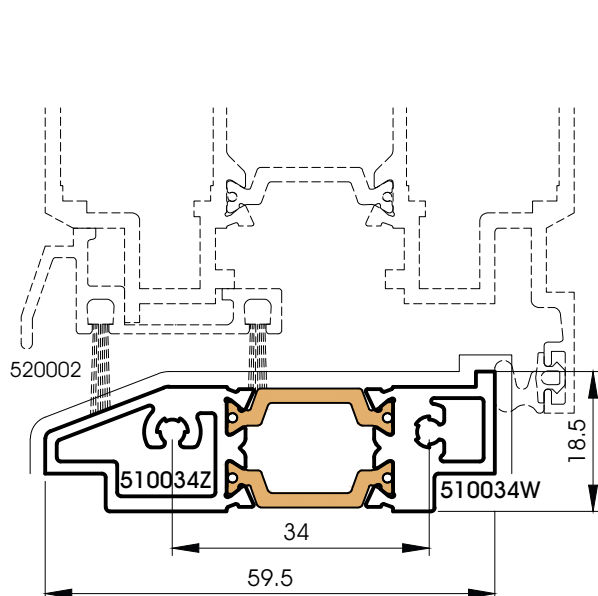

510034
Sill with thermal break

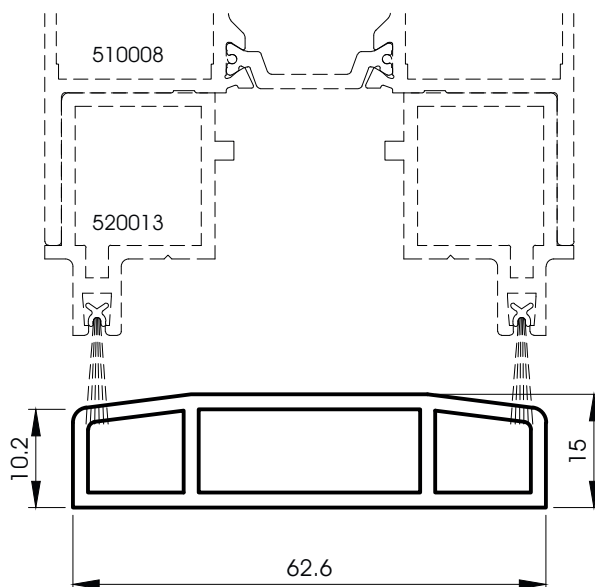


520015
Comete 70TH APD sill

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420030					0.354	184	0.96	1.54
420031					0.336	174	0.91	1.22
420032					0.336	174	0.91	1.22
420033					0.27	125	0.65	1.02
420034					0.258	119	0.61	0.77
420035					0.246	113	0.57	0.57
420036					0.281	130	0.6	1.1
420037					0.269	124	0.56	0.85
420038					0.257	118	0.51	0.64




420030

Straight glazing bead
for 24 to 26 mm




420031

Straight glazing bead
for 27 to 29 mm




420032

Straight glazing bead
for 30 to 32 mm




420033

Rounded clip-on glazing
bead for 24 to 26 mm




420034

Rounded clip-on glazing
bead for 27 to 29 mm




420035

Rounded clip-on glazing
bead for 30 to 32 mm




420036

Bevelled clip-on glazing
bead for 24 to 26 mm



420037

Bevelled clip-on glazing
bead for 27 to 29 mm




420038

Bevelled clip-on glazing
bead for 30 to 32 mm

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420039					0.263	139	0.69	0.37
420040					0.323	170	0.61	1.18
420041					0.305	160	0.61	0.93
420042					0.288	151	0.6	0.73
420054					0.402	204	0.87	7.78
420068					0.235	115	0.66	0.2
420160					0.289	149	0.79	0.59
420164					0.278	146	0.75	0.5
420063					0.415	214	1.05	3.30
420064					0.169	87	0.40	0.20
420166					0.303	156	0.85	0.75




420040

Bevelled glazing bead
for 24 to 26 mm




420041

Bevelled glazing bead
for 27 to 29 mm




420042

Bevelled glazing bead
for 30 to 32 mm




420064

Right-angled clip-on glazing
bead for 52 to 55 mm




420039

Right-angled glazing
bead for 42 to 44 mm




420160

Right-angled glazing
bead for 36 to 38 mm




420164

Right-angled glazing
bead for 36 to 39 mm




420166

Right-angled glazing
bead for 32 to 35 mm

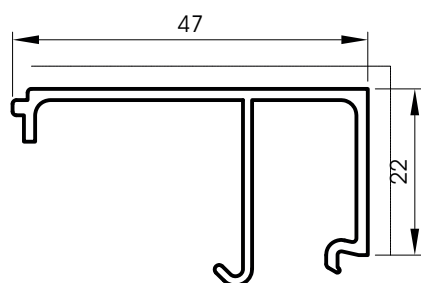


420063

Right-angled glazing bead
for 8 to 11 mm

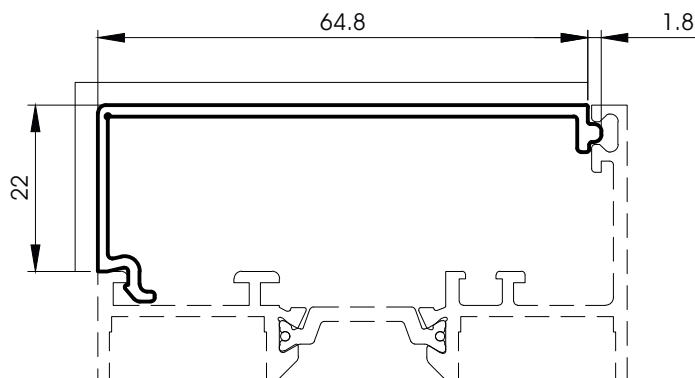

420054

Rabbet cover






420068

Right-angled glazing
bead for 45 to 48 mm

— View faces
- - - Visible faces

SECTIONS - Scale 1:1




Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420010					0.604	280	1.53	7.13
420011					0.694	317	1.69	16.21
420012					0.857	387	1.83	30.75

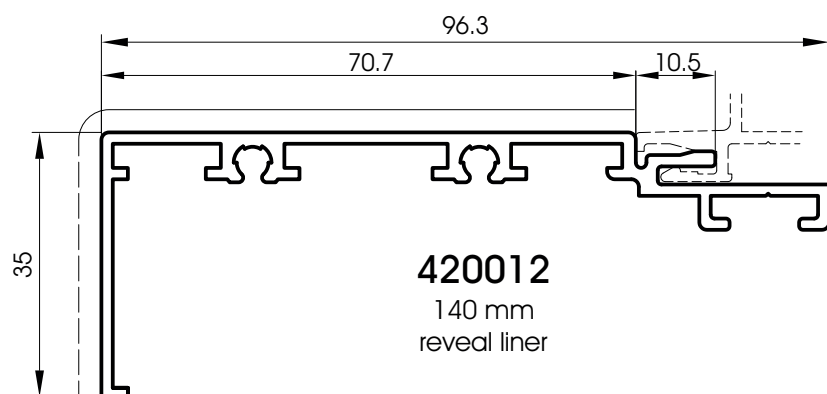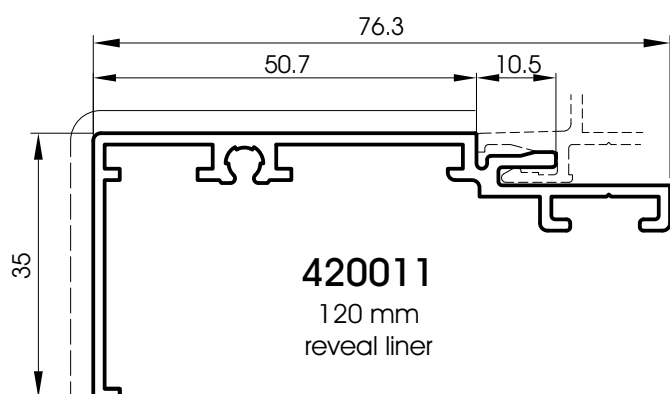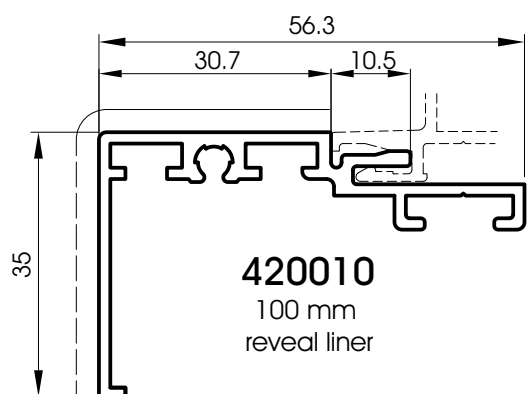

— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420013					0.938	427	1.91	51.56
420059					1.213	467	2.58	90.35
420014					1.322	507	2.66	132.39

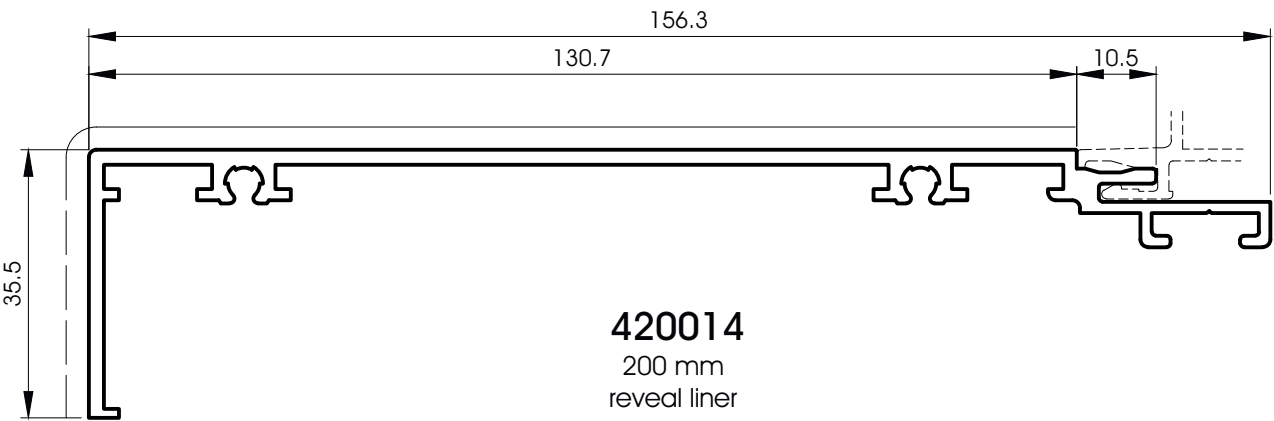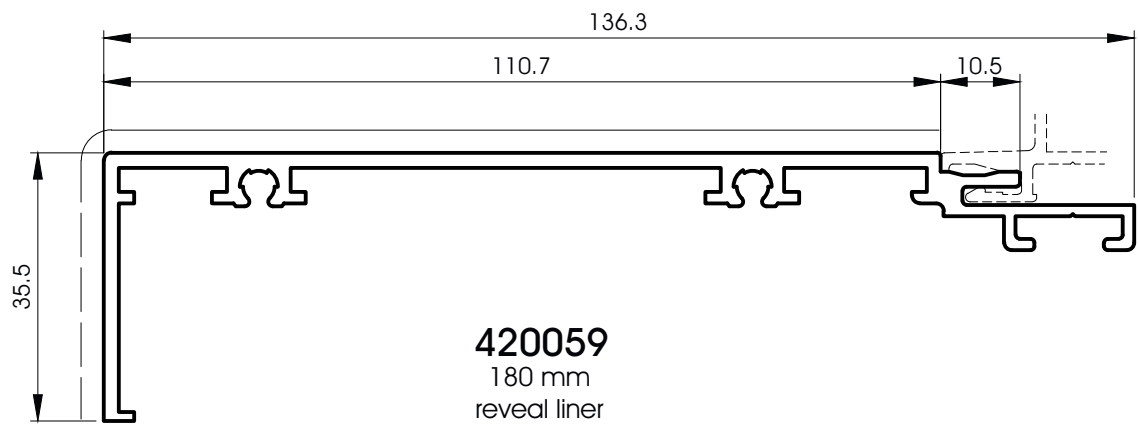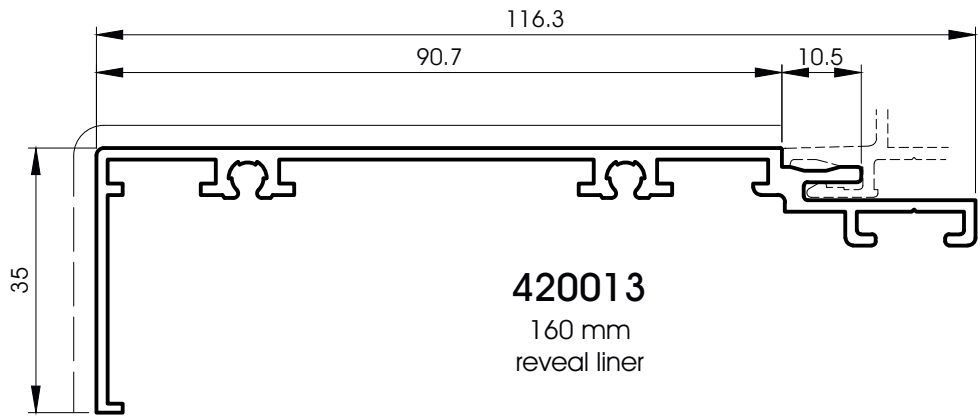


— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420082					0.744	336	15.75	4.00
420084					0.964	436	51.30	5.10

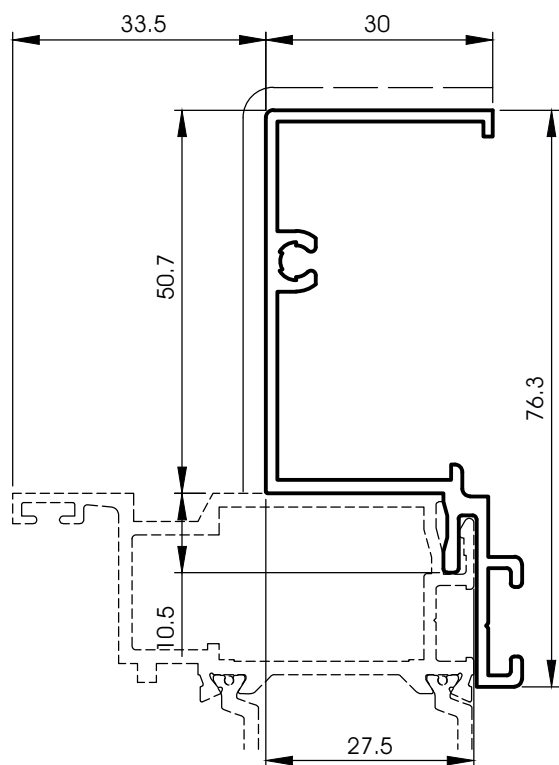

420082
Offset reveal liner
120 mm

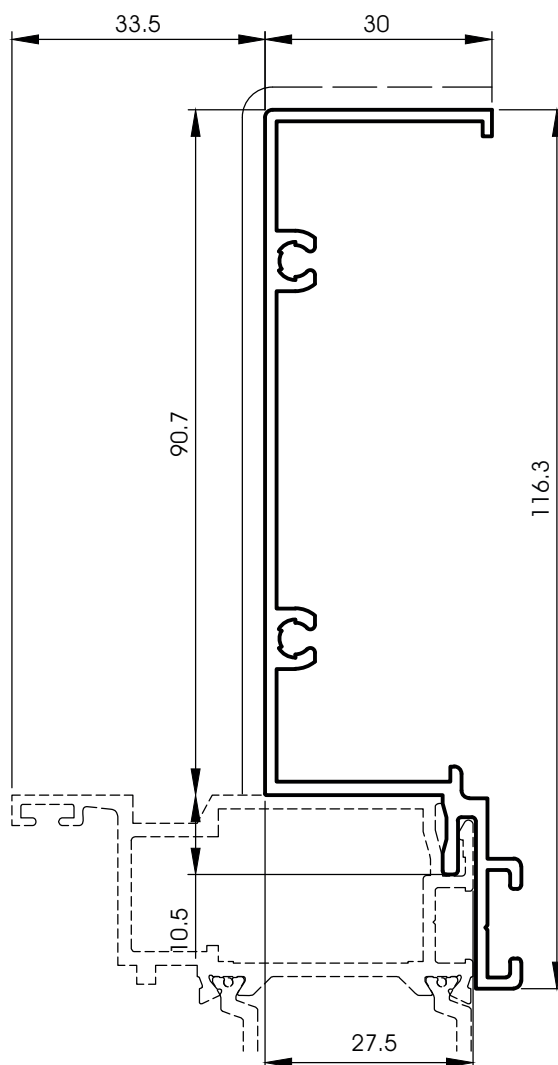


420084
Offset reveal liner
160 mm


— — — View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420002					0.108	55		
420003					0.101	55		
420004					0.397	174	7.42	0.05
420005			460000		0.174	82	0.42	0.04
420006			460000		0.227	104	1.14	0.04
420028					0.300	134	2.98	0.05
420066					0.128	72	0.2	0.05

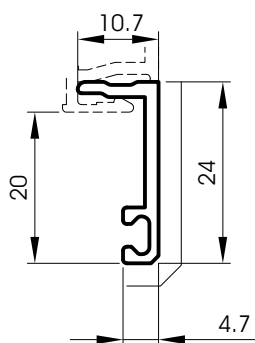


420005
24 mm architrave

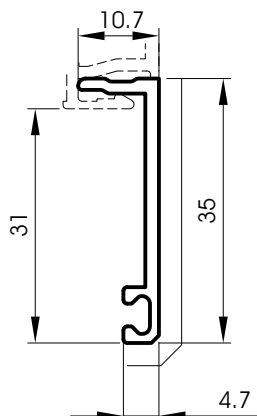


420006
35 mm architrave

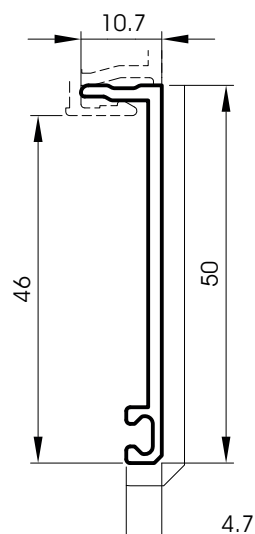


420028
50 mm architrave

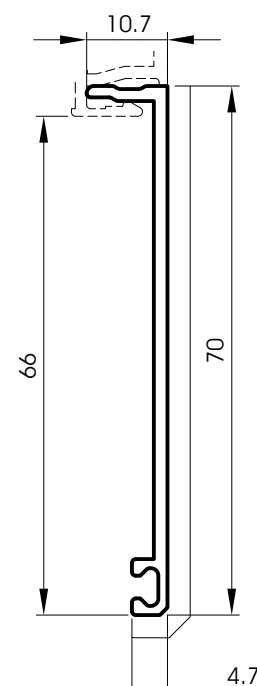


420004
70 mm architrave



420002
Snap-in groove
joining piece

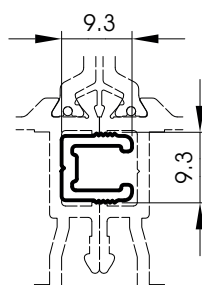

420003
Static joining piece

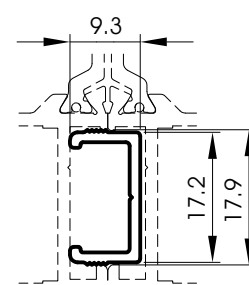


420066
Static joining piece
for large chamber


— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
5041					1.315	454	43.8	11.5
5041 + □60x30x3							109.8	
5042					1.101	366.7	20.2	9.2
5042 + □30x30x3							31.42	
5057					0.193	120	0.62	0.22

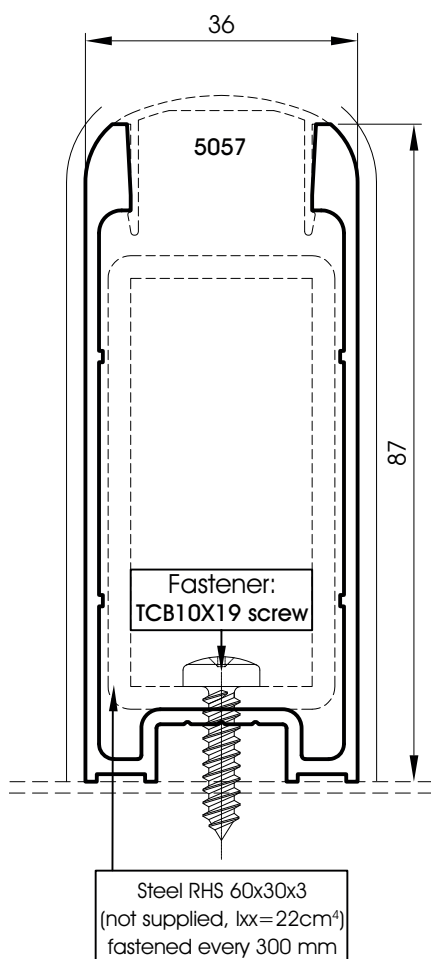

5041
Universal stiffener

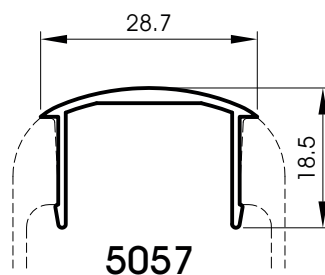


Cover cap sections
5041-5042

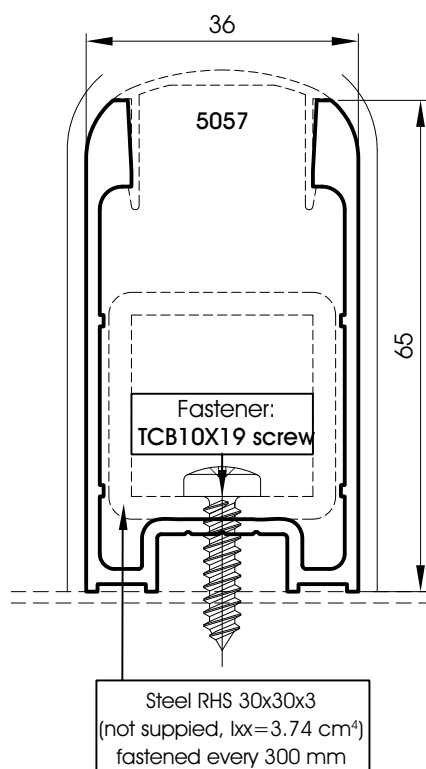


5042
Universal stiffener

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	I _{xx} (cm ⁴)	I _{yy} (cm ⁴)
410060					0.968	232	1.78	19.12
410061					1.483	331	16.03	29.8
410067					0.898	210	1.57	15.27
510029					0.785	235	0.3	15.3

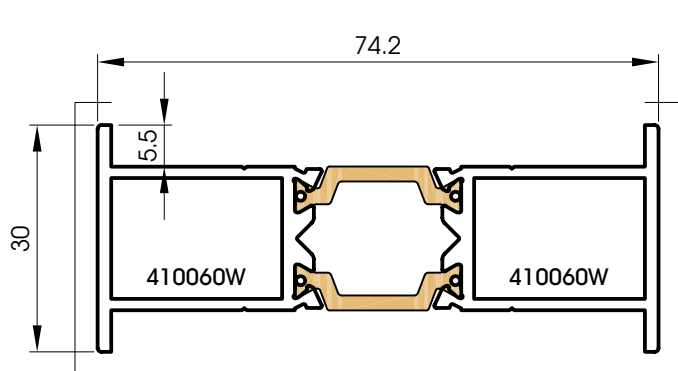


410060
180° joining piece

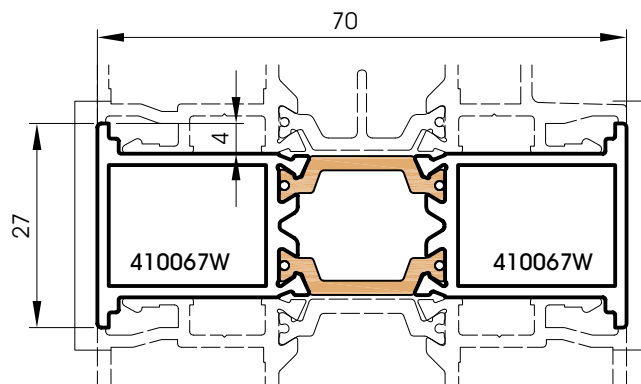

410067
180° joining piece

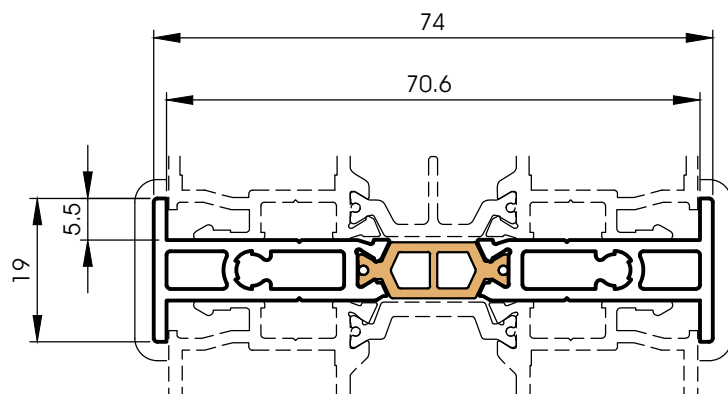

510029
Joining section


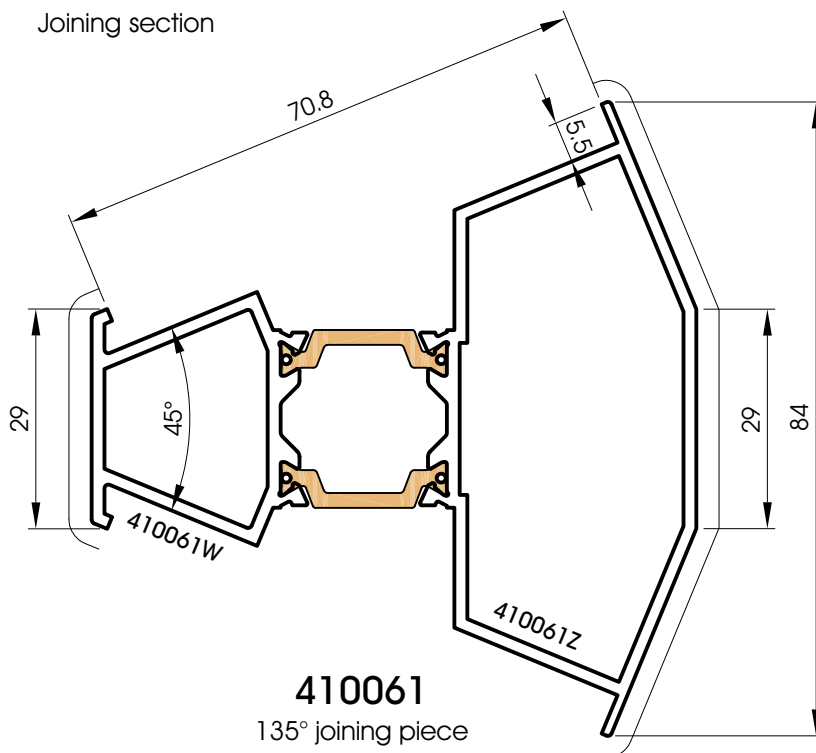


410061
135° joining piece

— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410062					1.713	384	35.99	27.72
410063					1.327	228	14.06	17.64

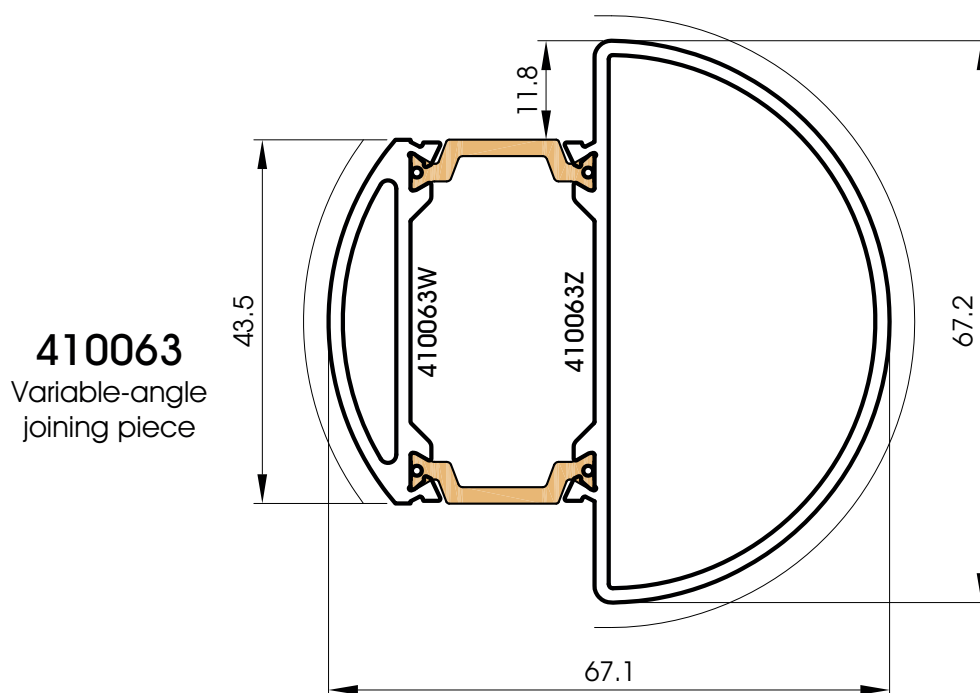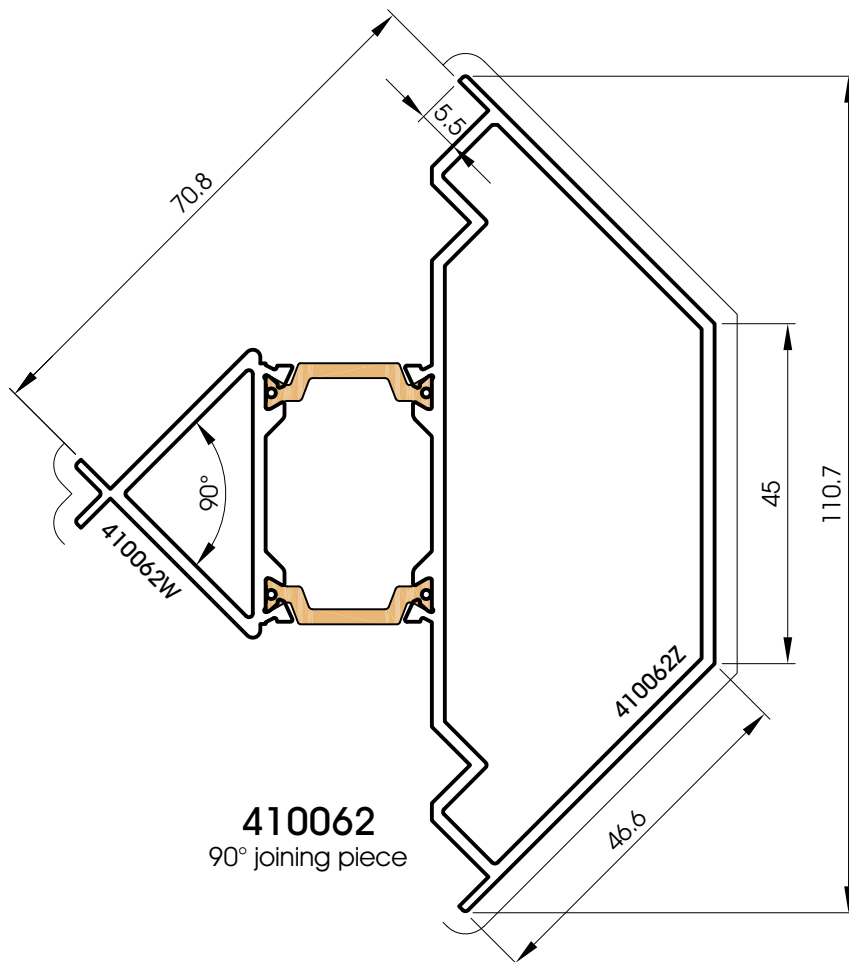

— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410100					1,741	392	33,1	33,05

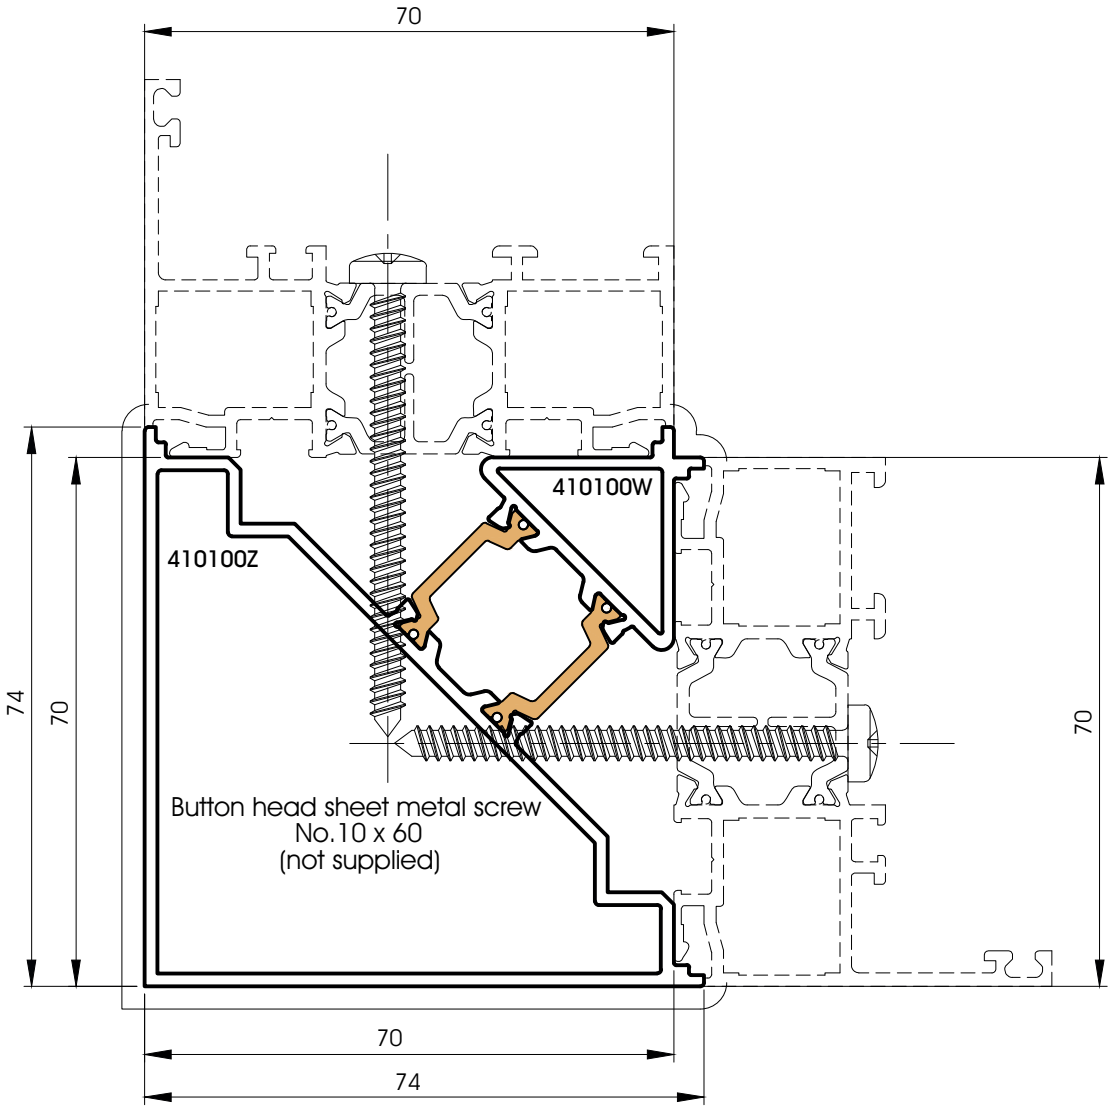


410100
90° out-facing post, 74mm

— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410070					0.974	279	1.20	16.15
510022					1.807	410	11.75	92.15
510025		560000			1.488	313	14.50	25.05

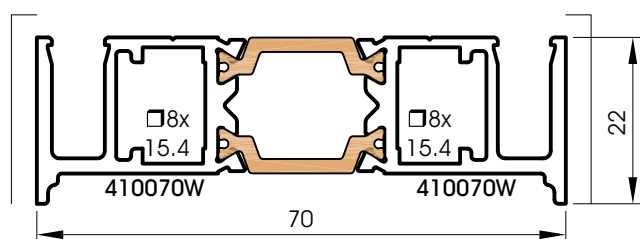


410070

Expansion section

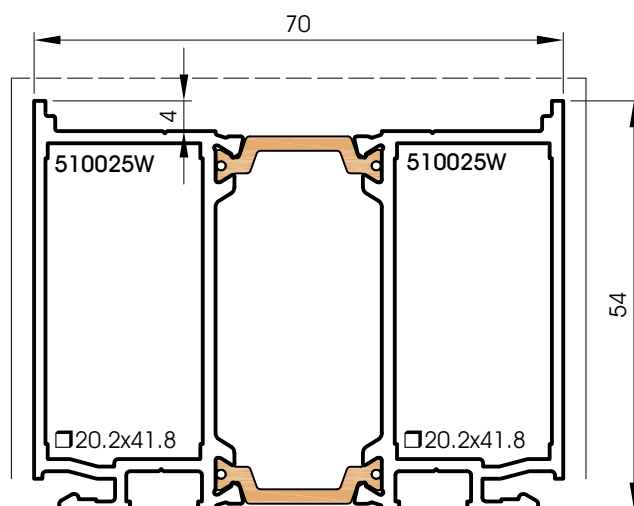

510025

50 mm spacer

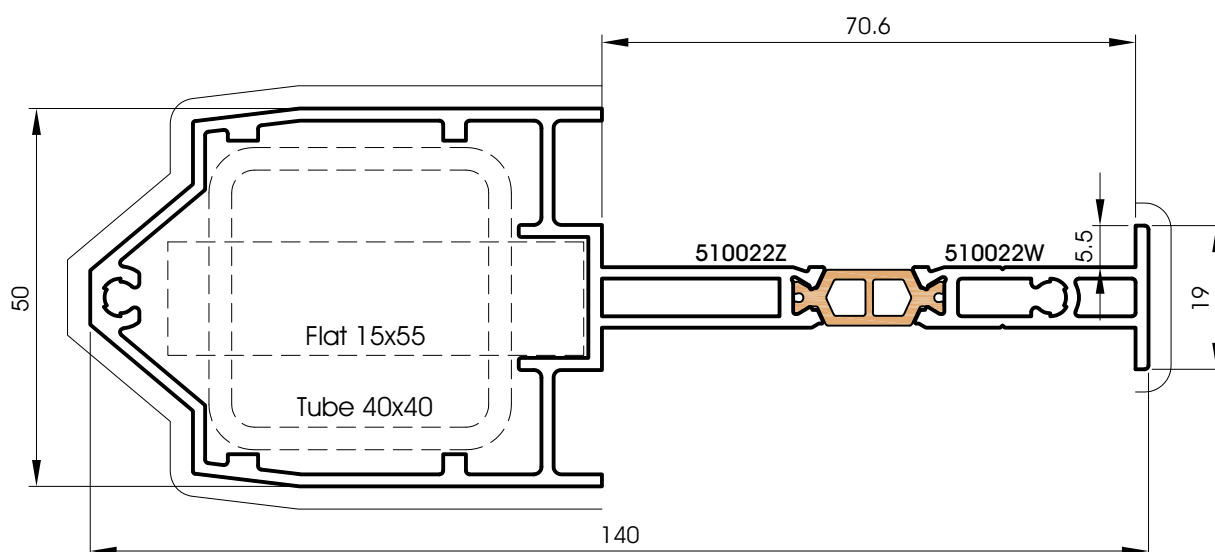


510022

Reinforced joint

— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410073					1.694	399	95.20	6.05

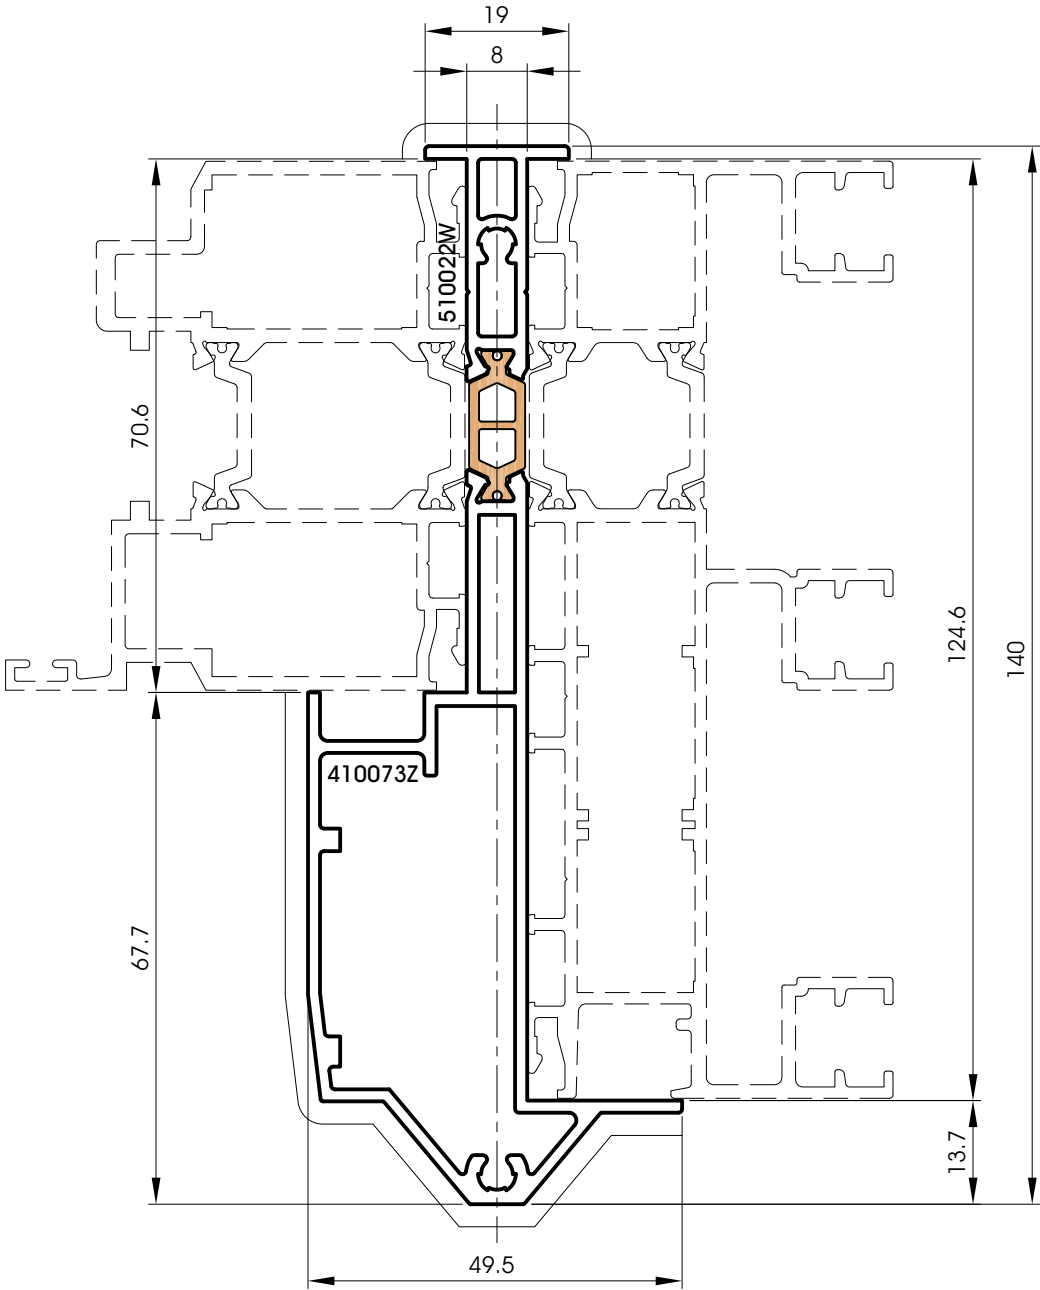


410073
Three-track joint

— View faces
- - - Visible faces

SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
410078					1.888	346	148.50	3.00

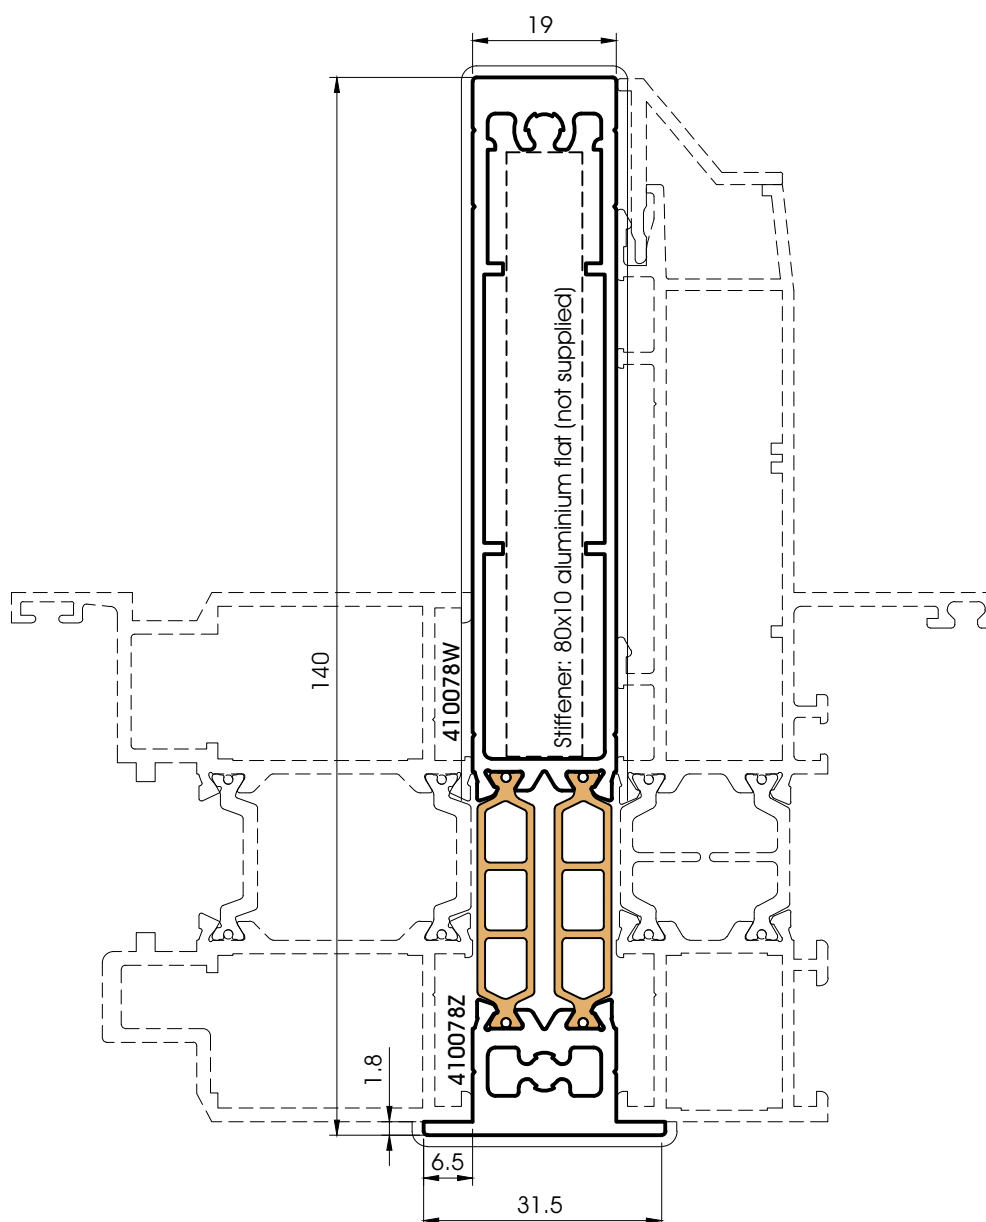


410078
50-70 stiffener

—— View faces
- - - Visible faces


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
520004					0.778	213	5.35	11.93
520003					0.91	256	3.77	14
930001					0.160			

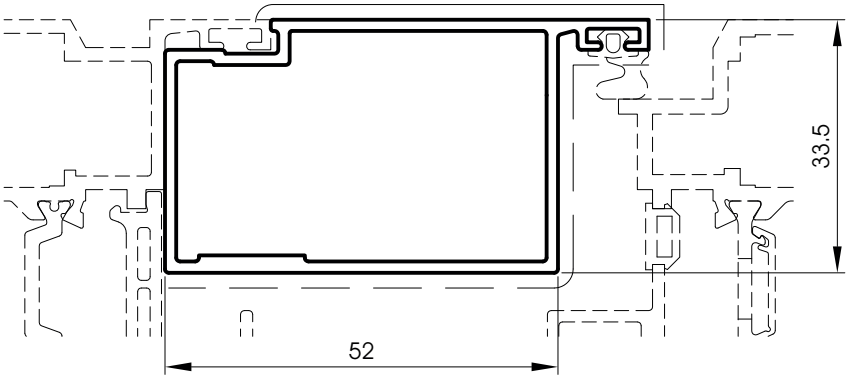


520004

Fixed frame section for electromagnetic catch

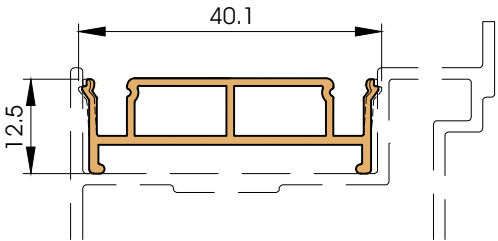

930001N

Thermal shield

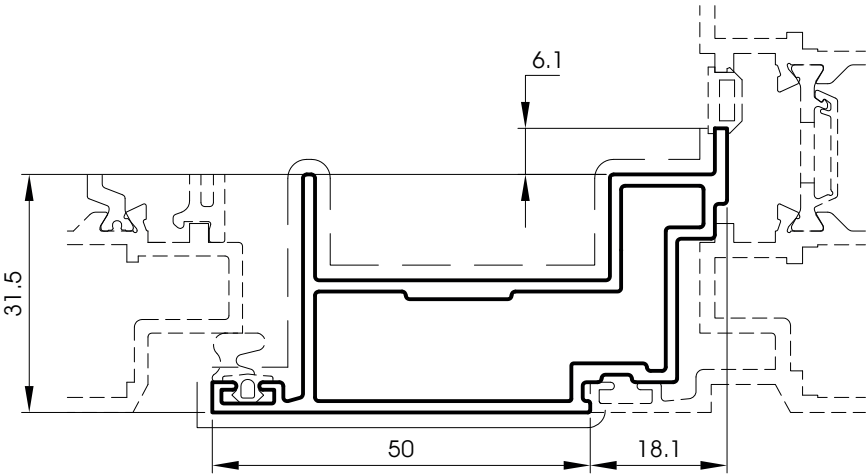


520003

Opening frame section for electromagnetic catch


— View faces
- - - Visible faces

SECTIONS - Scale 1:1


Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
TU40X2					0.645	126	4.30	4.30
TU50X2					0.814	157	8.70	8.70
520006					2.891	371	15.25	159.70

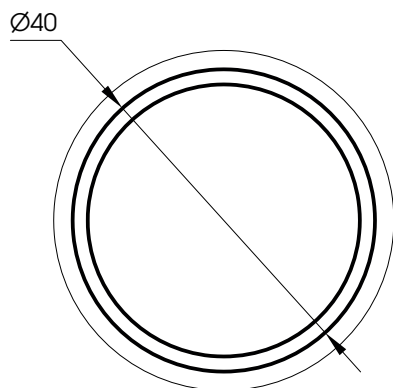

TU40X2
Round tube 40X2
(length 6500 mm)

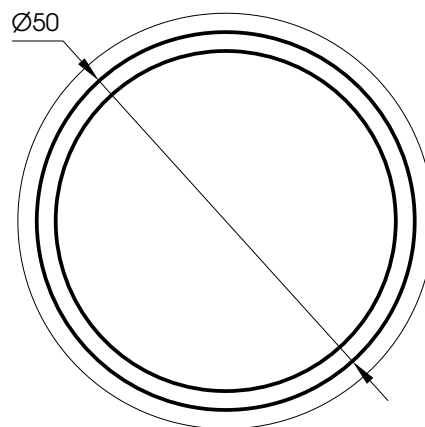


TU50X2
Round tube 50X2
(length 4600 mm)

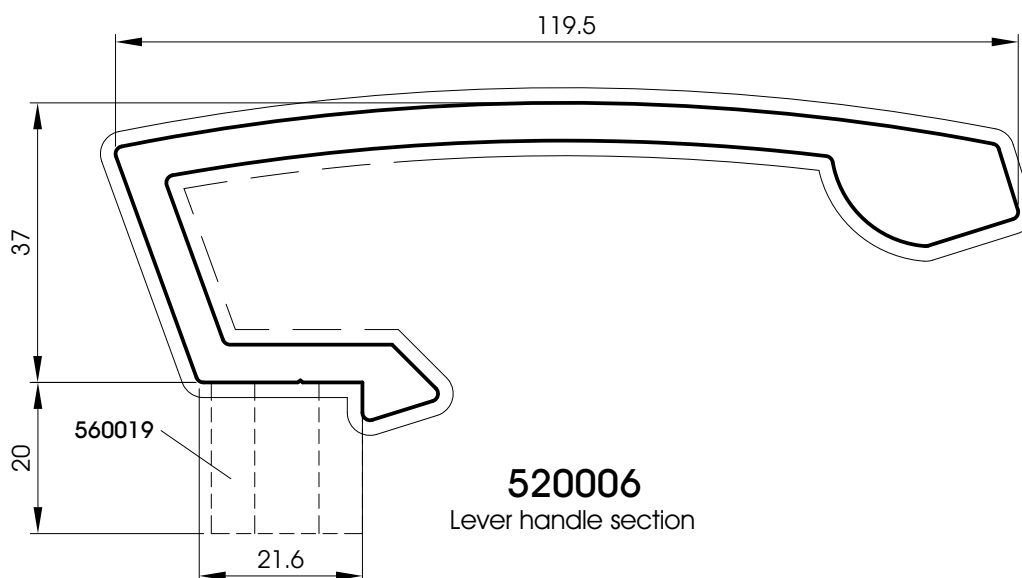

520006
Lever handle section


SECTIONS - Scale 1:1

Reference	Crimp-on corner cleat	Screw-on corner cleat	Holding bracket	Block	Weight (kg)	Outer periphery (mm)	Ixx (cm4)	Iyy (cm4)
420008					0,173	83	0,25	0,2
520014					0.394	211	0.11	8.57
720010					0.401	166	0.40	1.35
720011					0.180	69	0.25	0.05
720012					0.189	88	0.10	0.40
720013					0.232	101	0.30	0.30

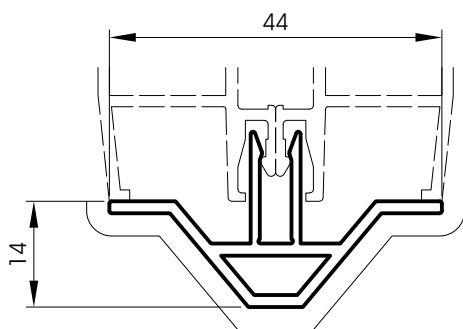


720010

124 mm fixed frame
join section




720011

124 mm fixed frame
flat trim

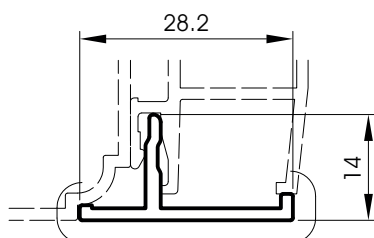


720012

Post trim




720013

Post trim



420008

Z Profile

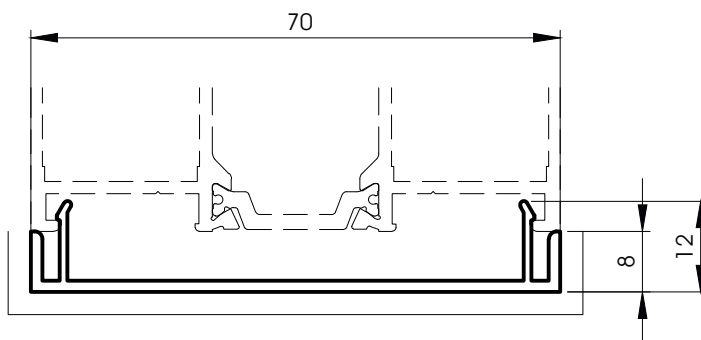

520014

70 mm fill section


— View faces
- - - Visible faces

CROSS-SECTIONAL VIEWS

CONTENTS


- Inward opening pages 50-51
- Outward opening pages 52-53
- Two-way opening pages 54-55
- Composite frame
single leaf inward or outward opening pages 56-57
- Composite frame
2-leaf inward or outward opening pages 58-59

INWARD OPENING - Scale 1:2

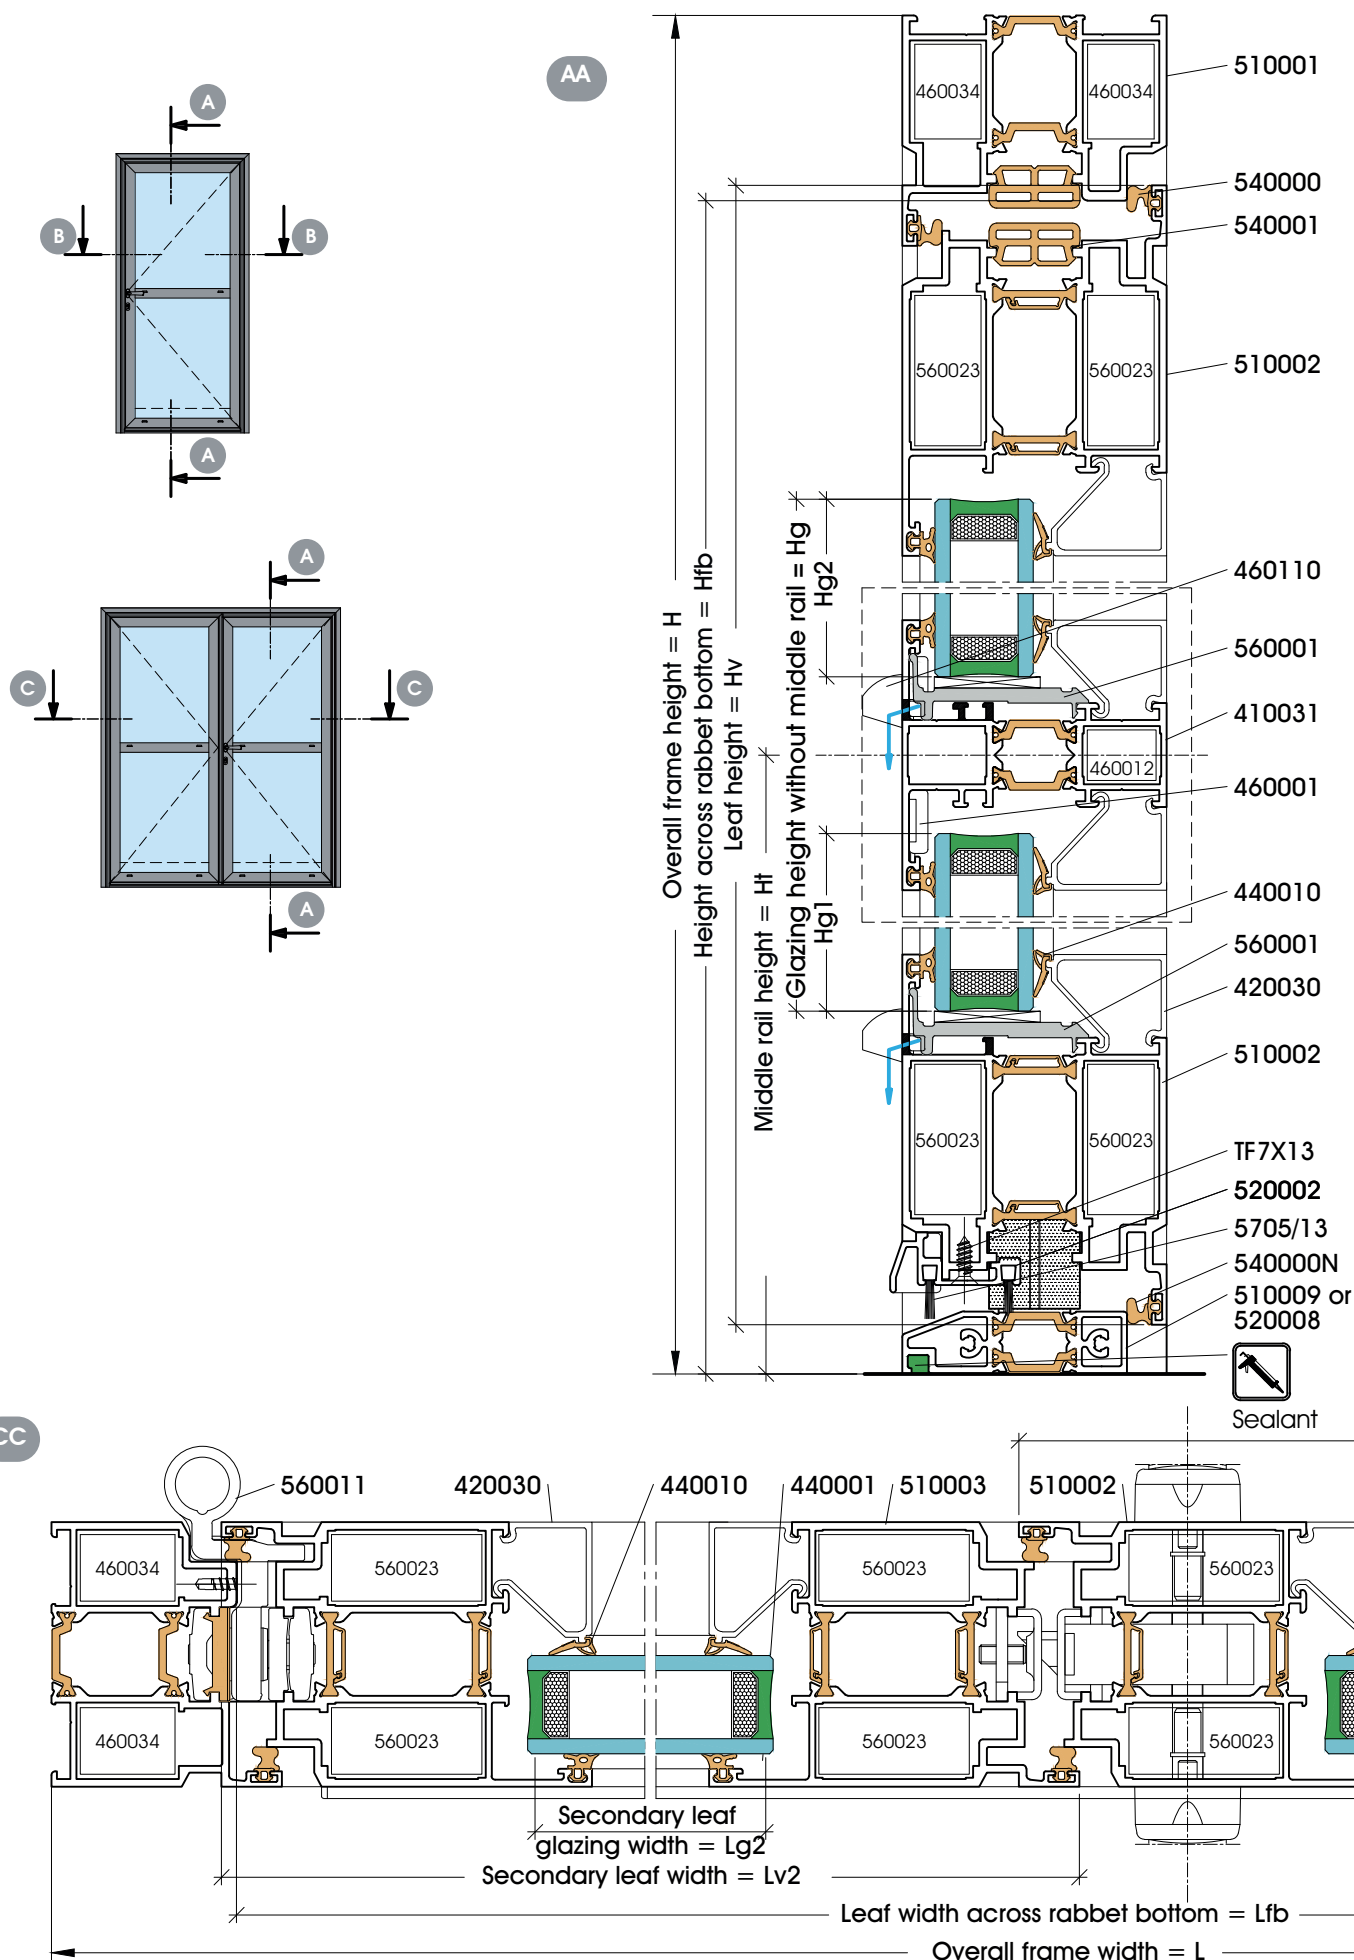

INWARD OPENING - Scale 1:2


BB

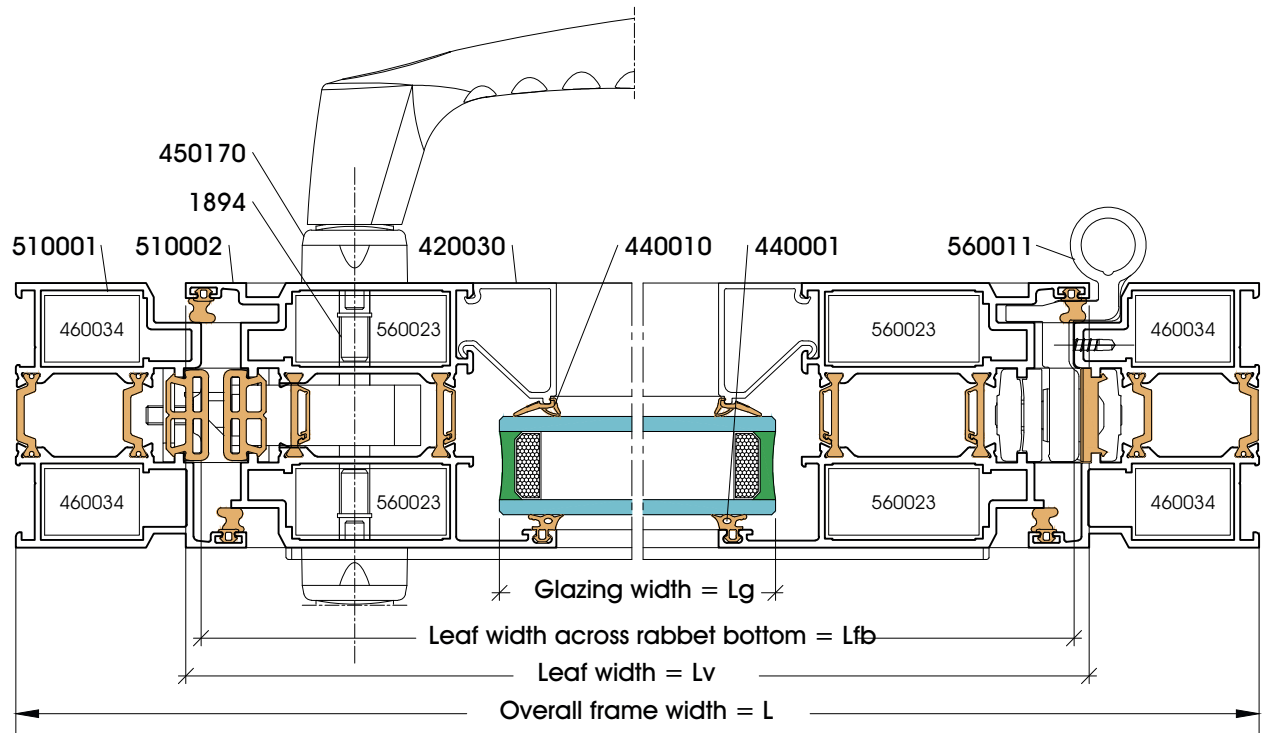

Main leaf width = L_{v1}

510002

560011

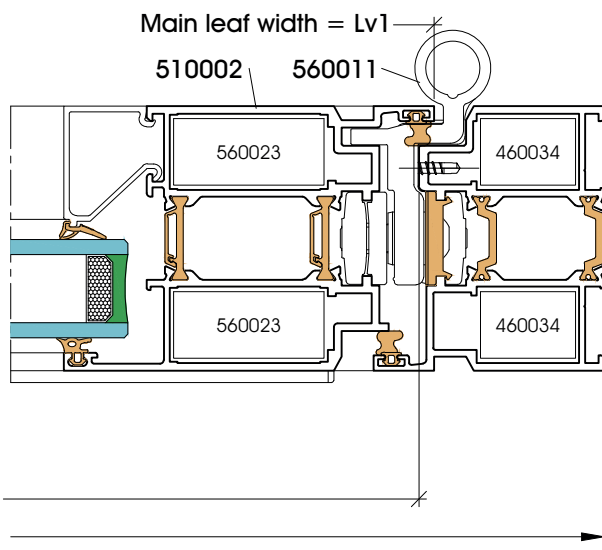


Options

- Kick plate p. 64 à 65
- Auto-retract kick plate p. 66
- Shutter pieces p. 67 à 68
- Architraves p. 69
- Integration with UNIVERS® 54mm range p. 70
- Middle rails p. 71
- Electromagnetic catch p. 72 à 73
- Strip handle p. 74
- Tubular handle p. 75
- Heat barrier p. 76 à 77

See our manufacturing drawing D5200.

OUTWARD OPENING - Scale 1:2

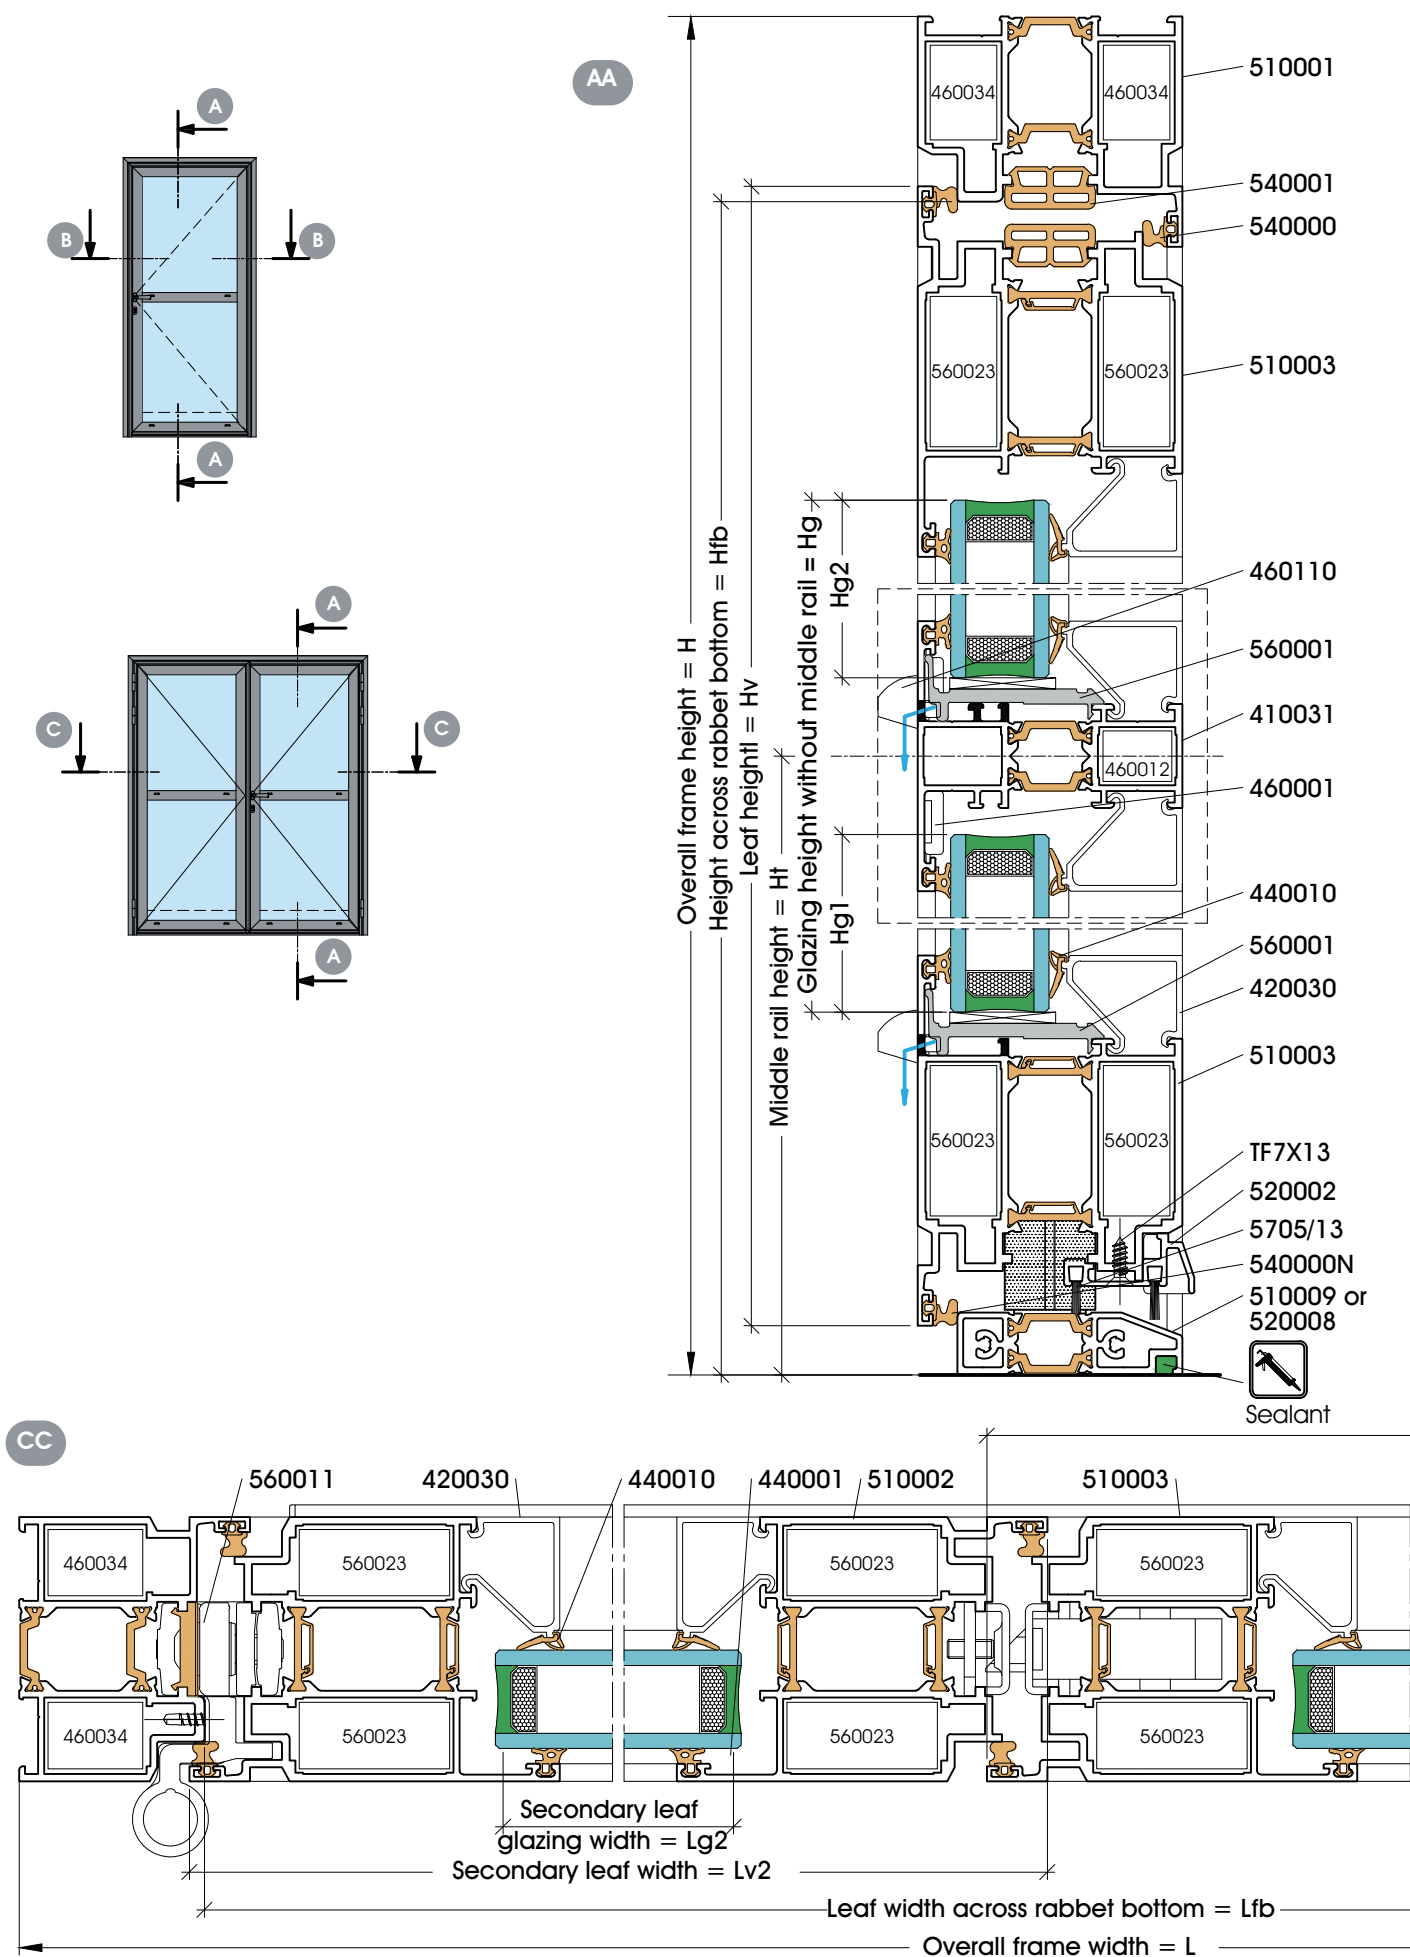



BB



- Kick plate p. 64 à 65
- Auto-retract kick plate p. 66
- Shutter pieces p. 67 à 68
- Architraves p. 69
- Integration with UNIVERS® 54mm range p. 70
- Middle rails p. 71
- Electromagnetic catch p. 72 à 73
- Strip handle p. 74
- Tubular handle p. 75
- Heat barrier p. 76 à 77


See our manufacturing drawing D5201.

TWO-WAY OPENING - Scale 1:3

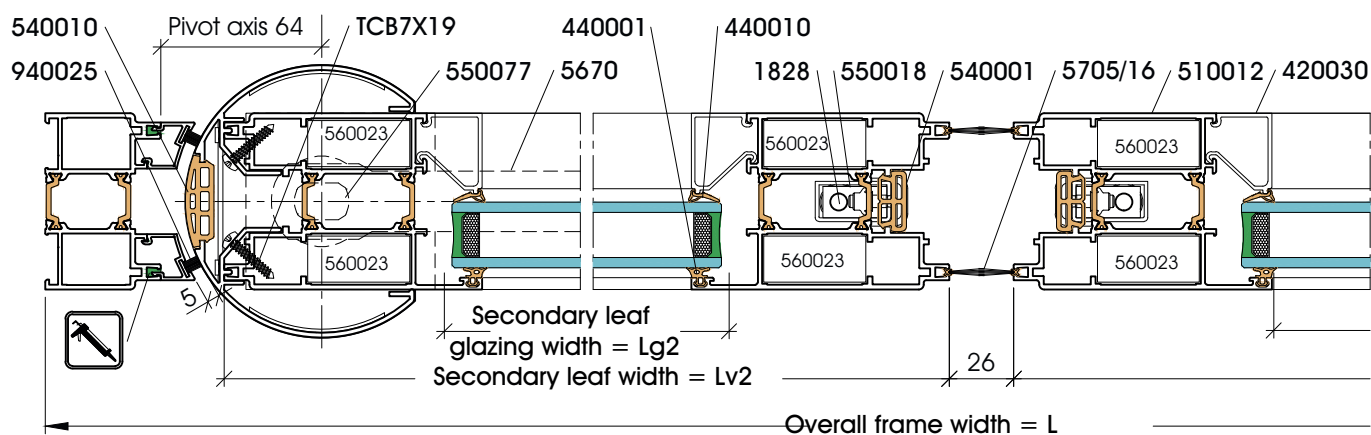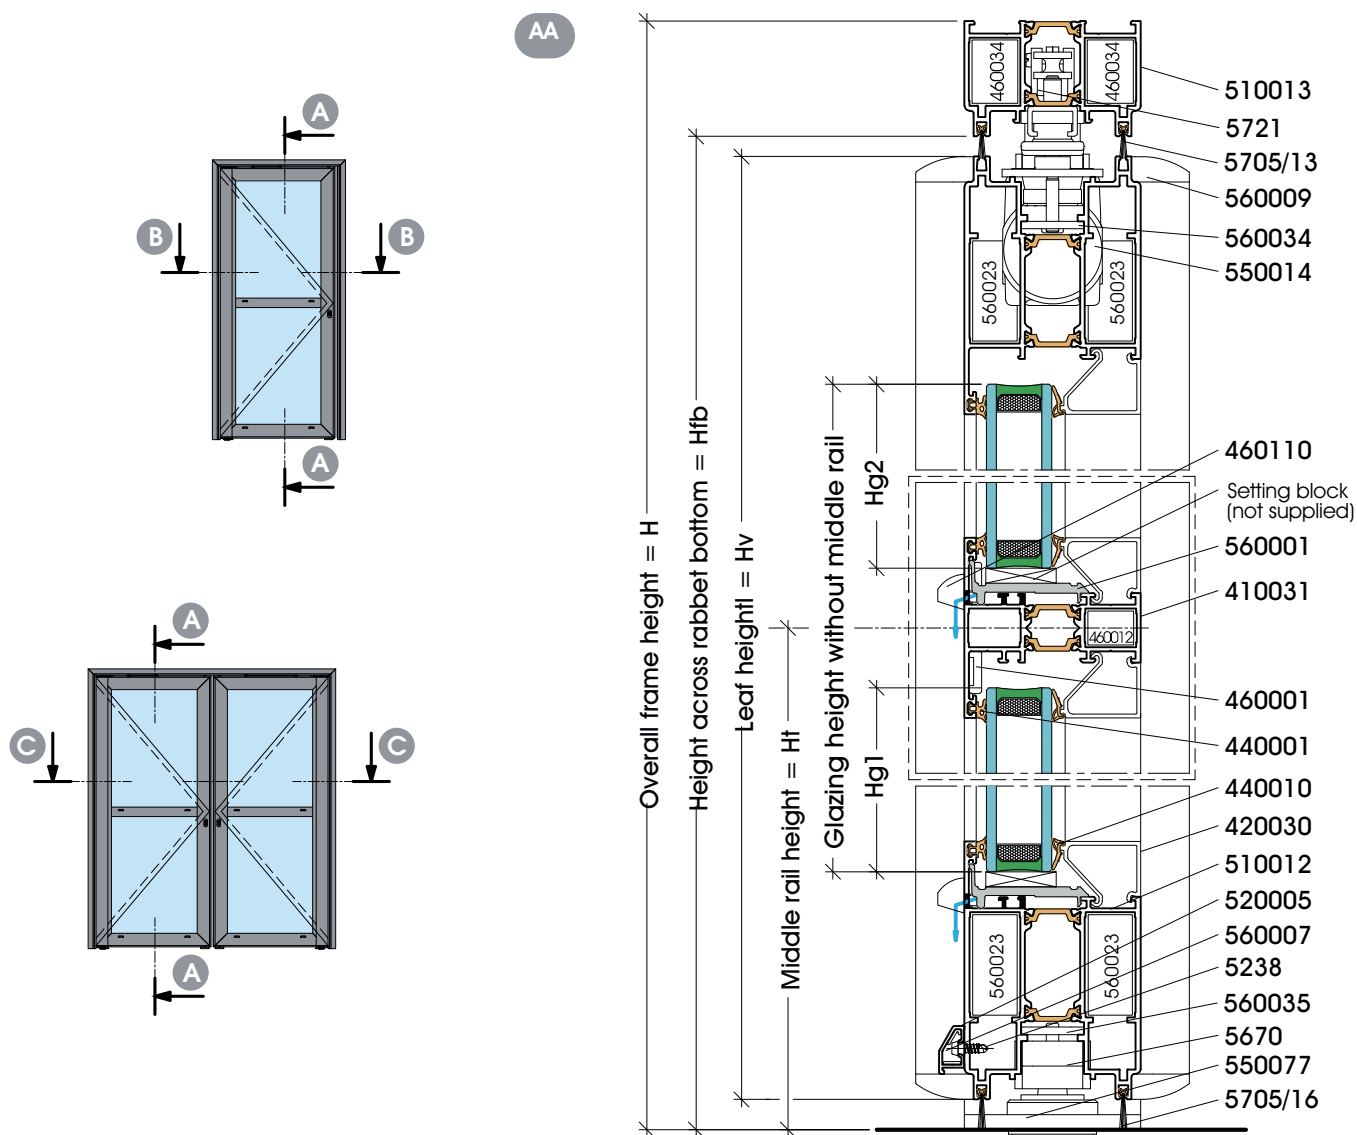


TWO-WAY OPENING - Scale 1:3

BB

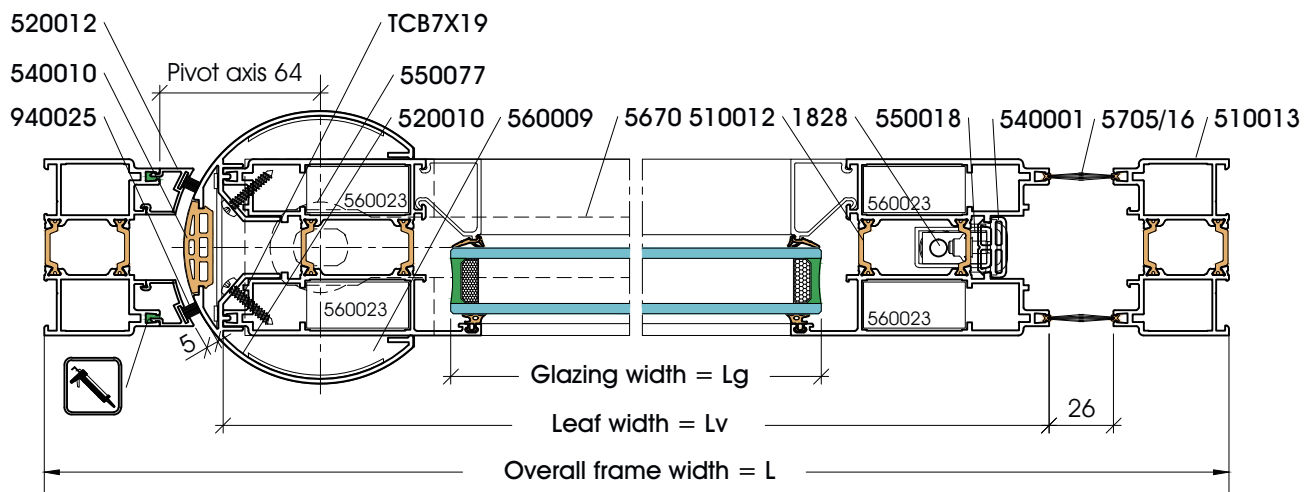


Options

- Kick plate (two-way) p. 61
- Sunken pivot p. 62
- Sill p. 63
- Integration with UNIVERS® 54mm range... p. 70
- Middle rails p. 72 à 73
- Strip handle p. 75
- Tubular handle p. 76 à 77

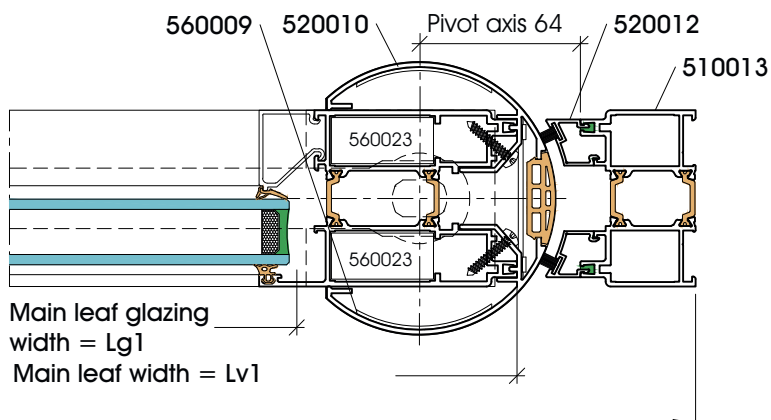

See our manufacturing drawing D5211.


COMPOSITE FRAME, SINGLE LEAF INWARD OR OUTWARD OPENING - Scale 1:2

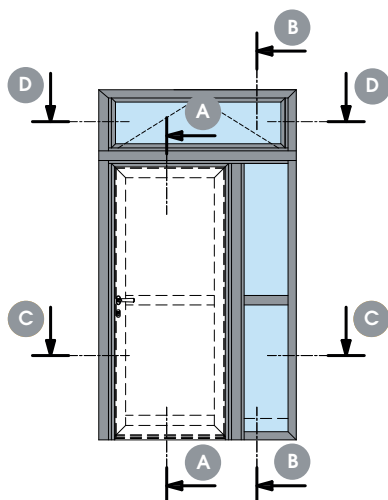


Options

- Kick plate on fixed parts. p. 64 à 65
- Shutter pieces p. 67 à 68
- Architraves. p. 69
- Middle rails. p. 72 à 73


DD

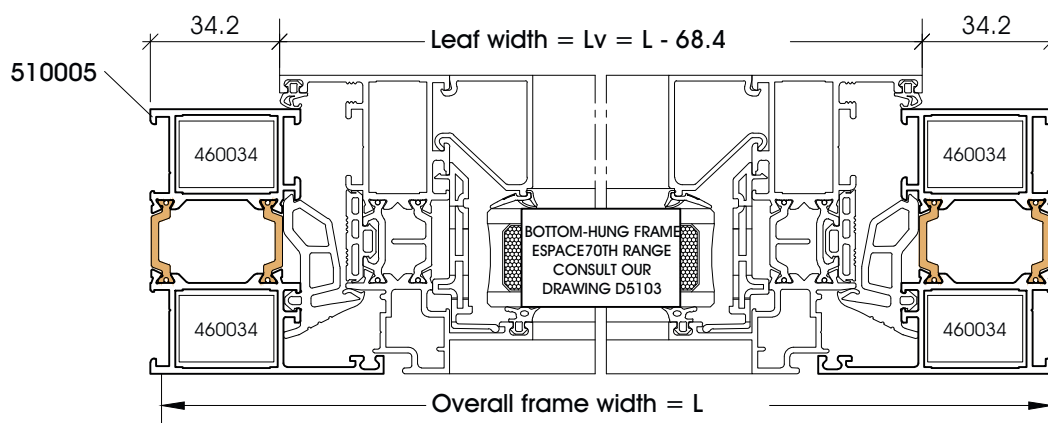

CC

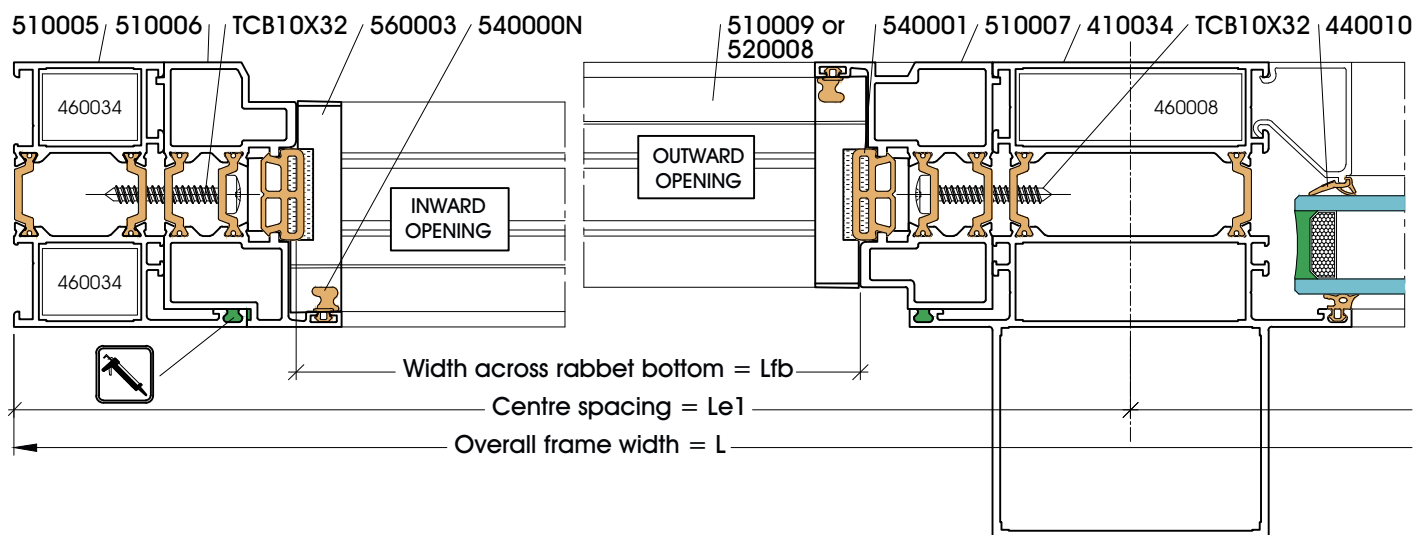


COMPOSITE FRAME, 2-LEAF INWARD OR OUTWARD OPENING - Scale 1:2

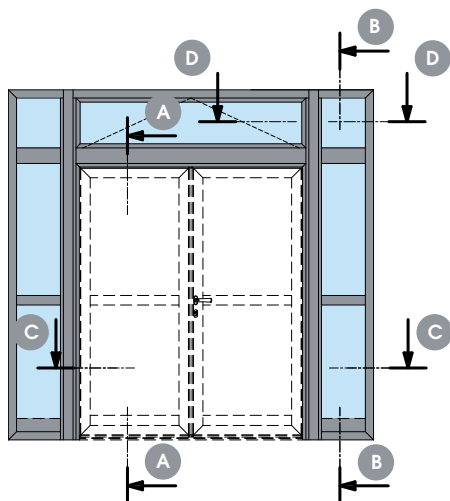


Options

- Kick plate on fixed parts. p. 64 à 65
- Shutter pieces p. 67 à 68
- Architraves. p. 69
- Middle rails. p. 72 à 73




DD

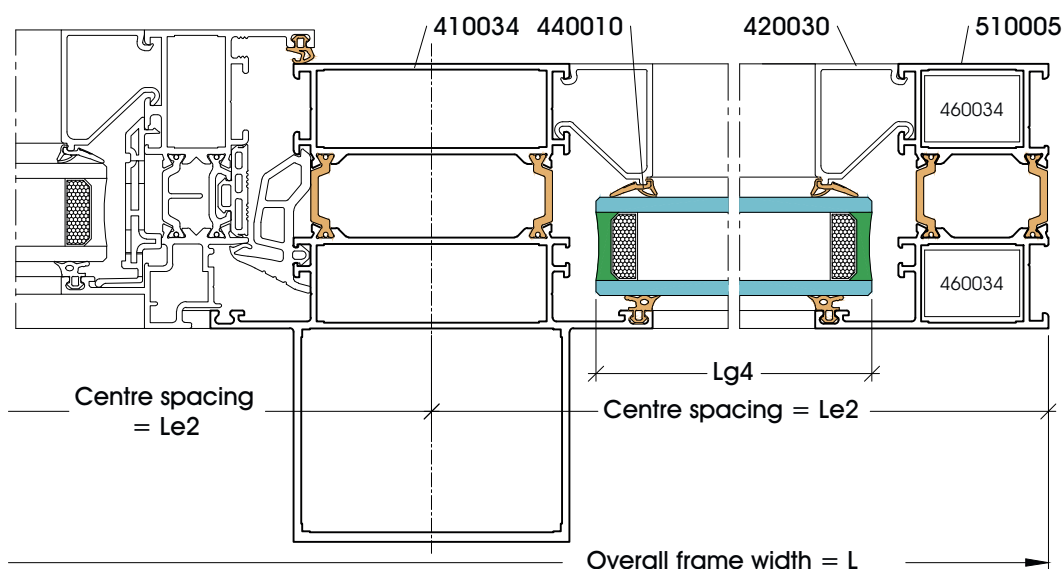

CC





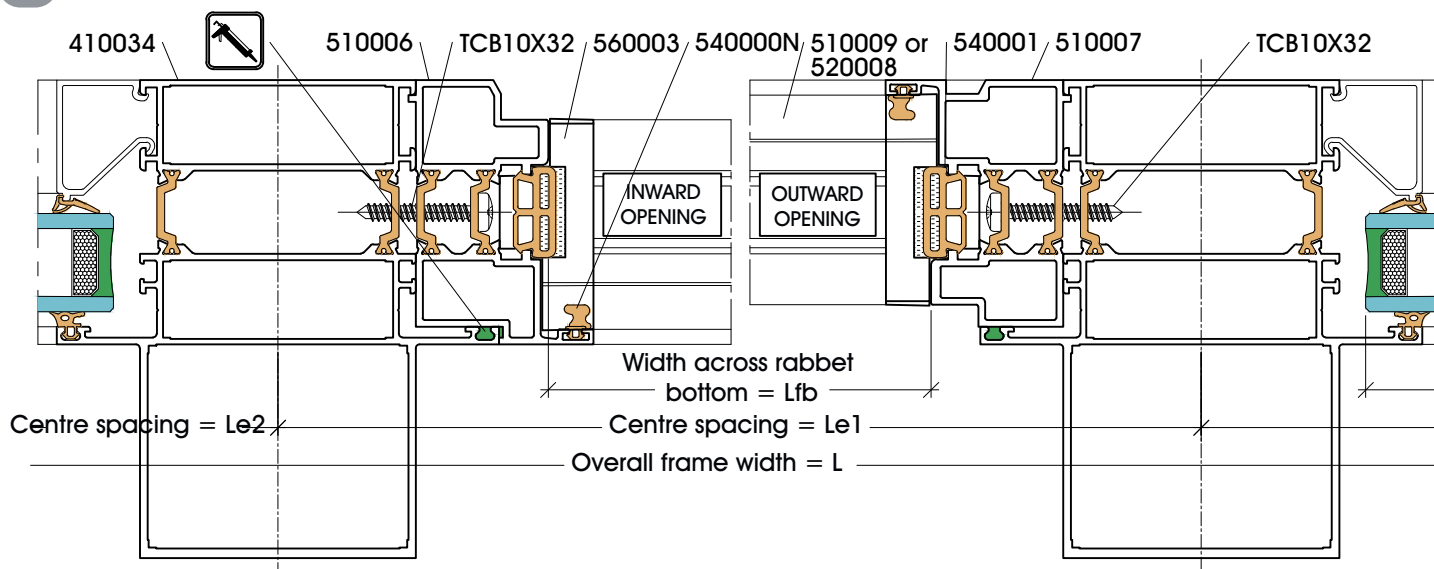


COMPOSITE FRAME, 2-LEAF INWARD OR OUTWARD OPENING - Scale 1:2

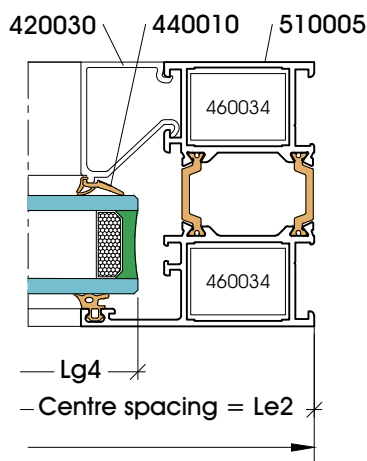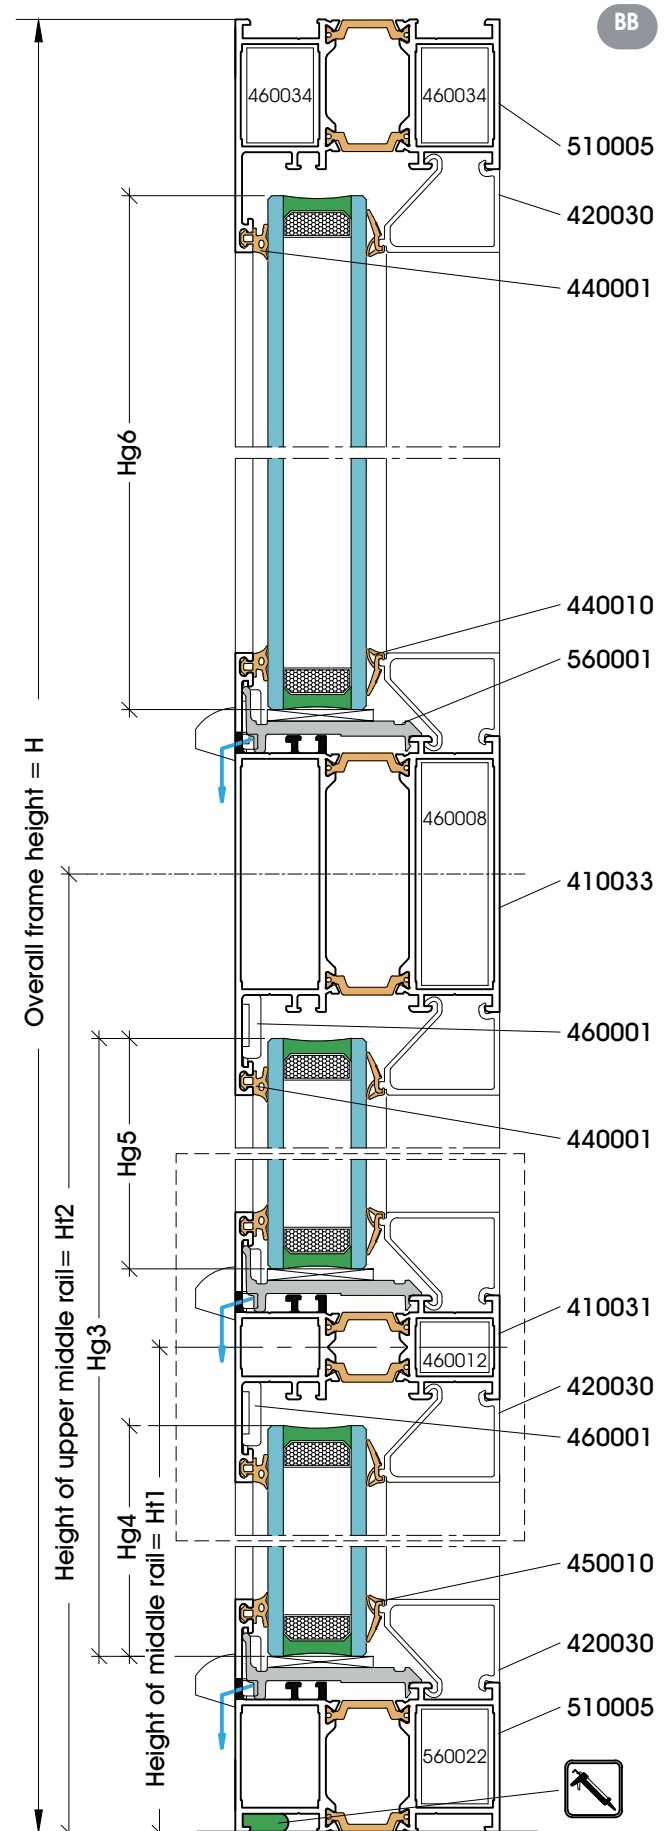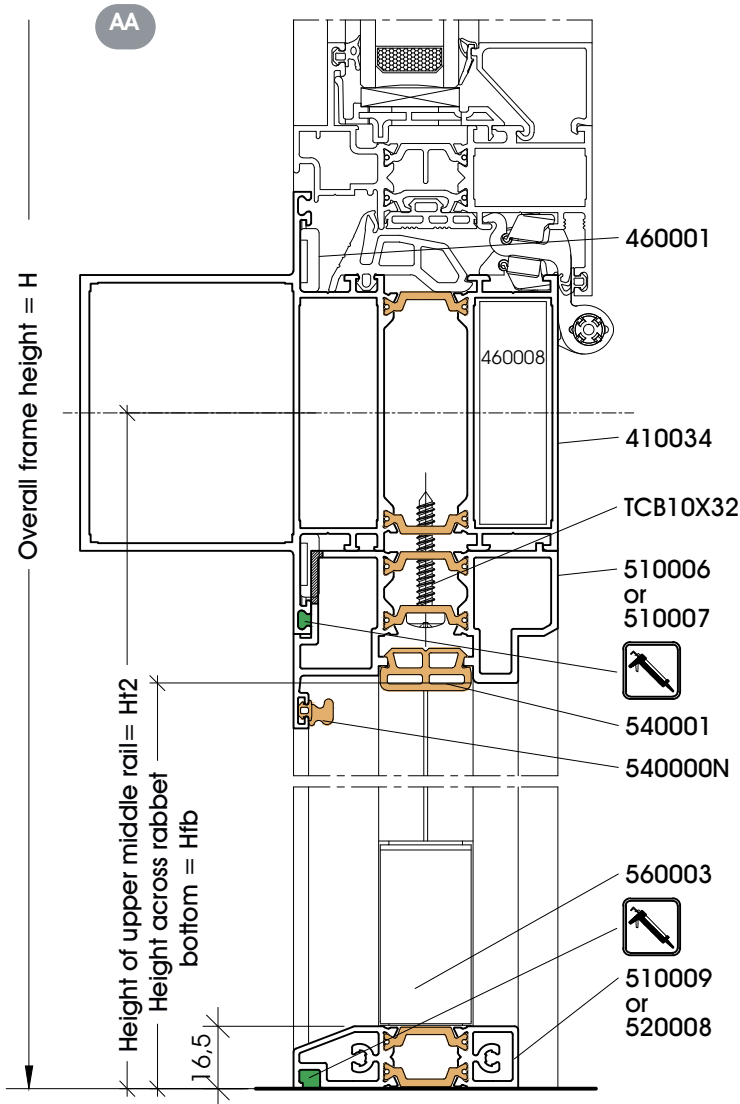



See our manufacturing drawing D5203.

KICK PLATE ON OPENING FRAME - Scale 1:2

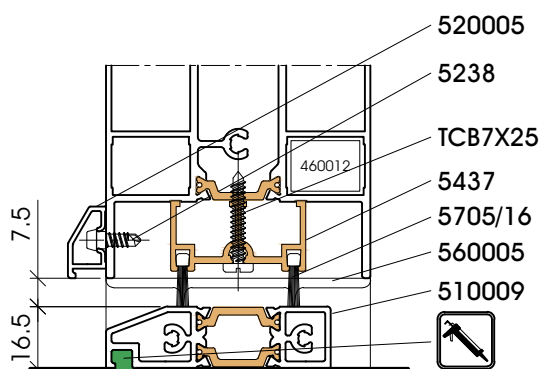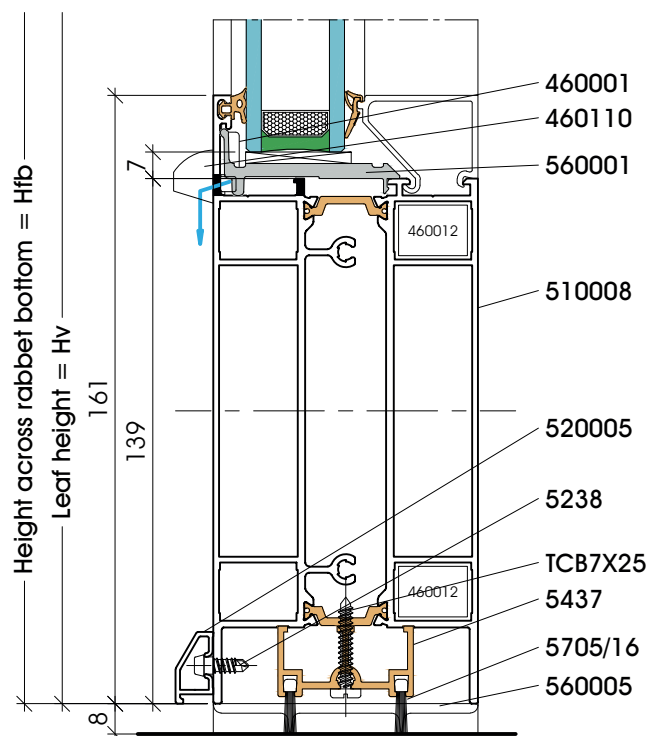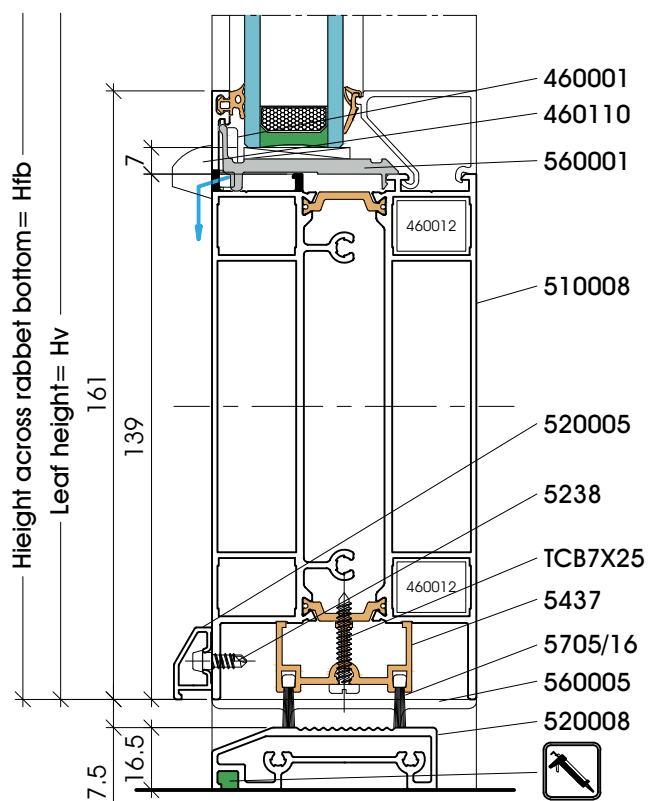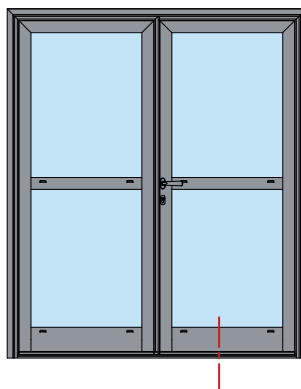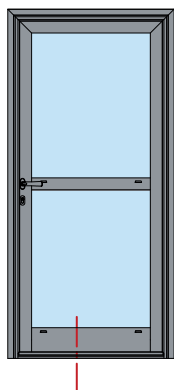




See our manufacturing drawings D5200 and D5201.

KICK PLATE ON TWO-WAY OPENING FRAME - Scale 1:2

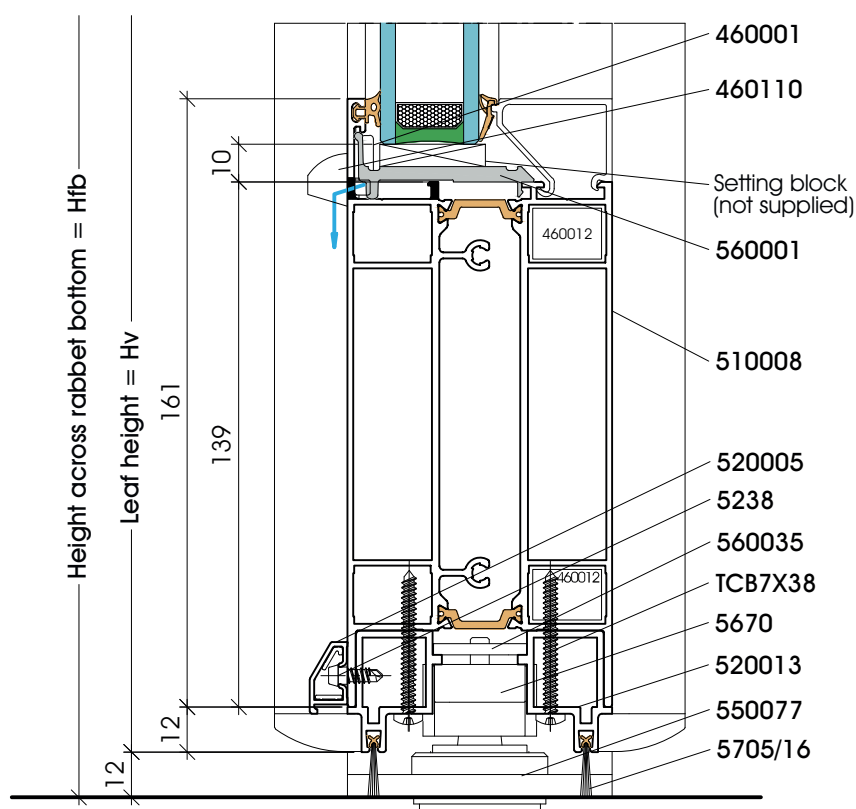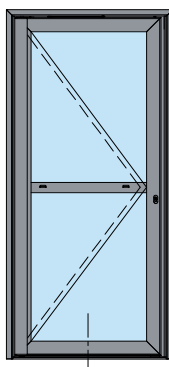



See our manufacturing drawing D5211.

SUNKEN PIVOT - Scale 1:2

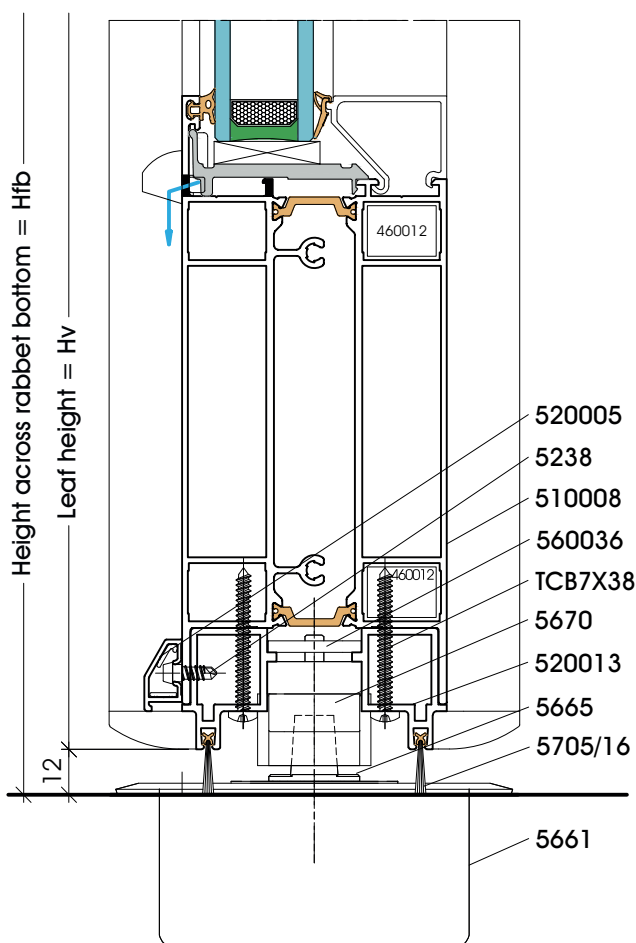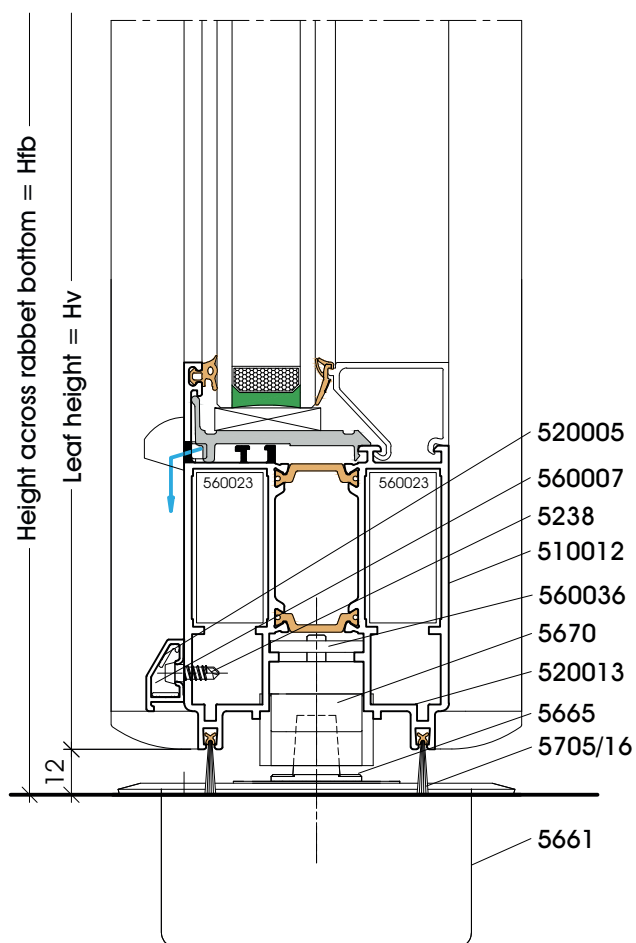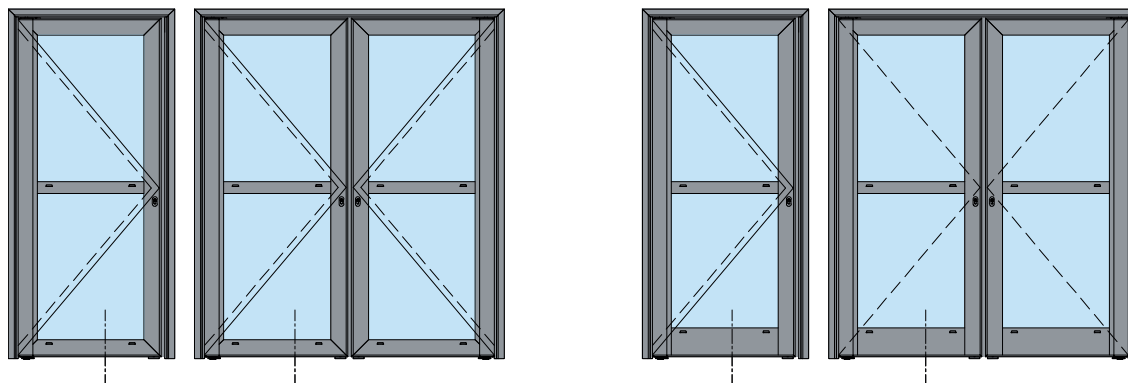



See our manufacturing drawing D5211.

SILL FOR TWO-WAY DOOR - Scale 1:2

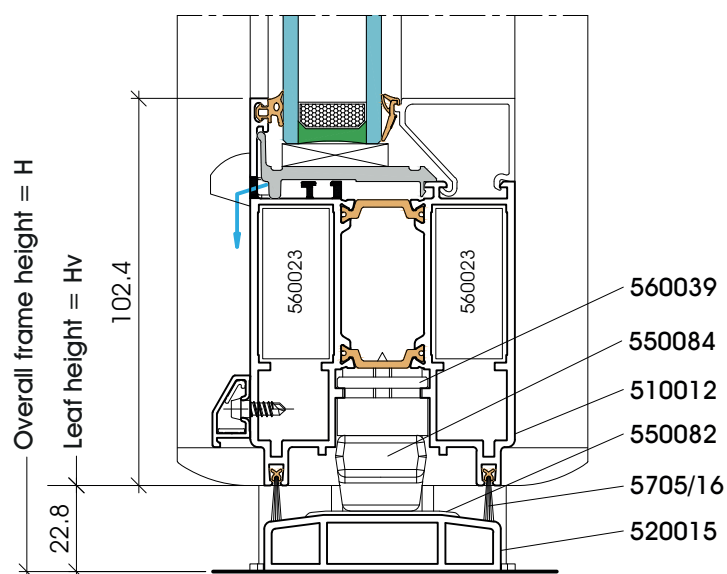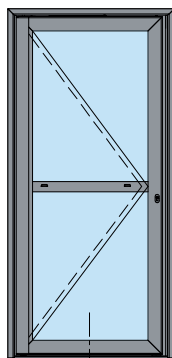



See our manufacturing drawing D5212.

KICK PLATE ON FIXED FRAME WITH 410033 - Scale 1:2

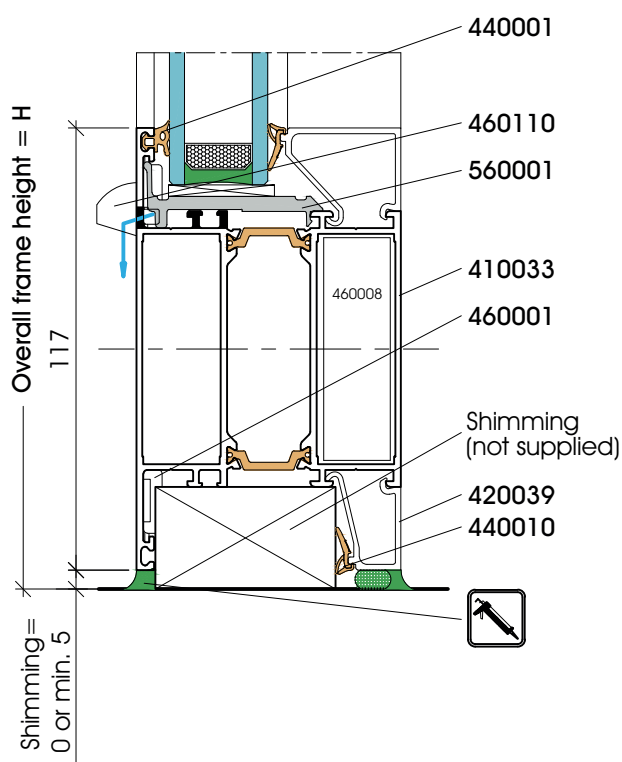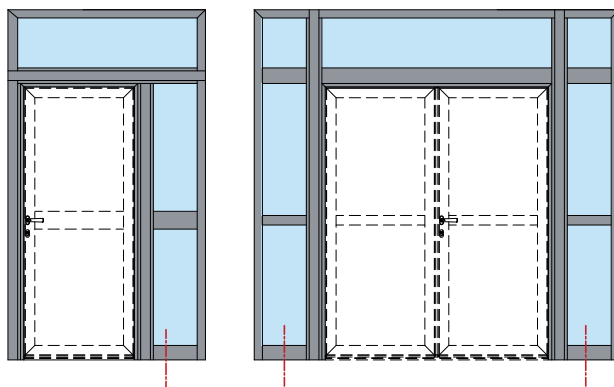



See our manufacturing drawings D5202 and D5203.

KICK PLATE ON FIXED FRAME WITH 410036 - Scale 1:2

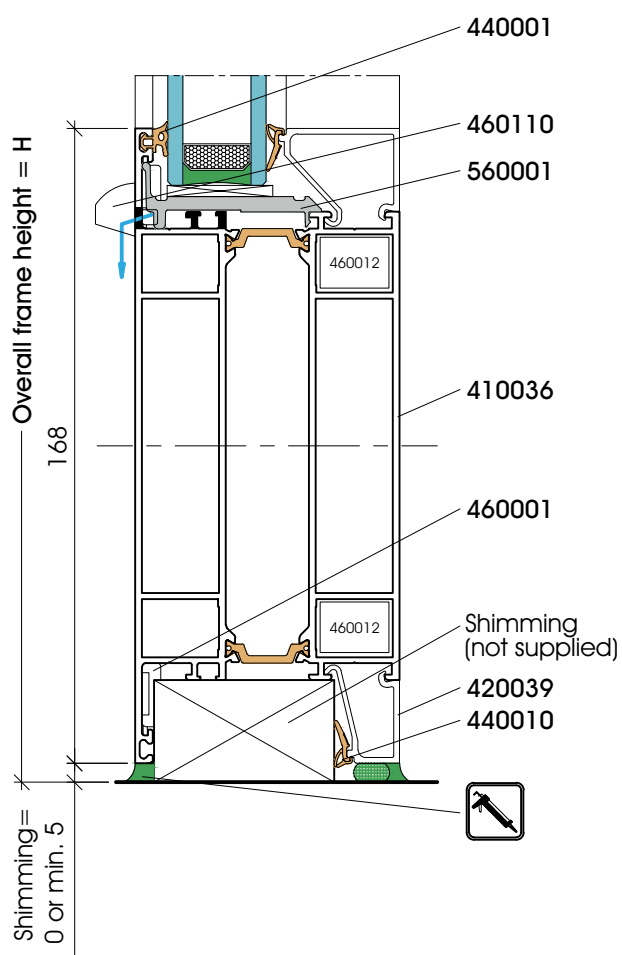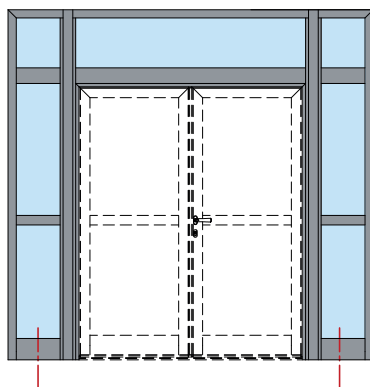


See our manufacturing drawings D5202 and D5203.

AUTO-RETRACT KICK PLATE - Scale 1:2

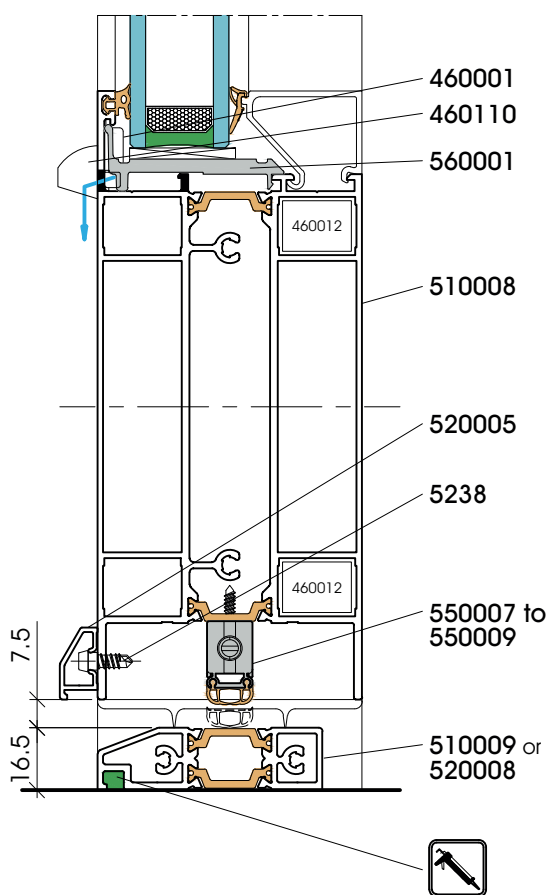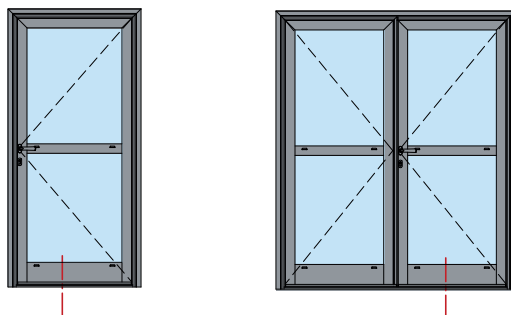

See our manufacturing drawing D5206.

SHUTTER PIECES - Scale 1:2

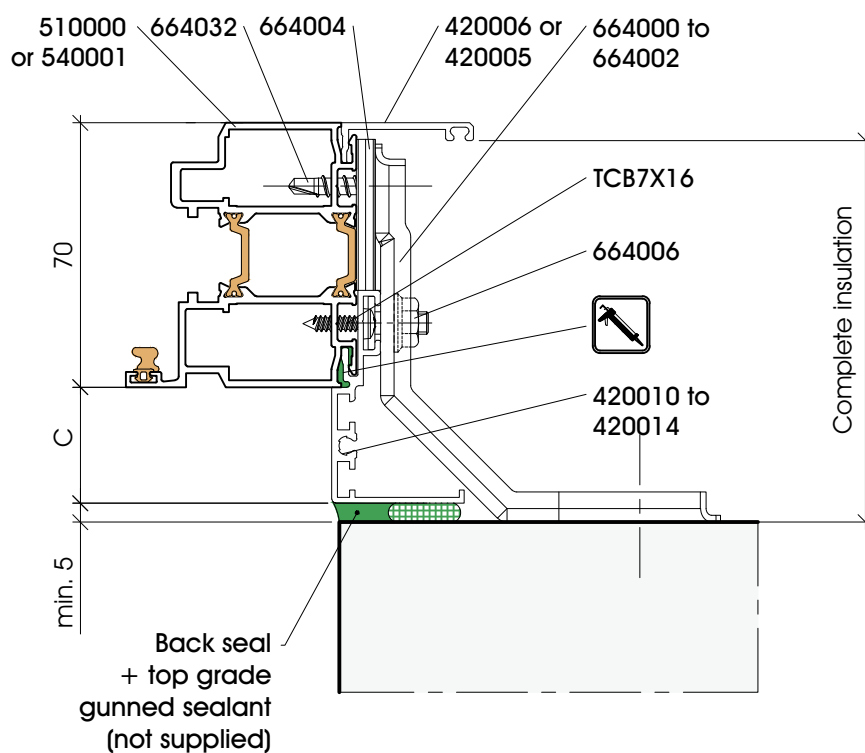

SHUTTER PIECES AND FASTENING LUGS: USAGE CHART

Complete insulation (mm)	Shutter piece ref.	Lug ref.	C (mm)
100	420010	664000	30.7
120	420011	640001	50.7
140	420012	640002	70.7
160	420013	640003	90.7
180	420059	664035	110.7
200	420014	640011	130.7

See our manufacturing drawing D6000.

SHUTTER PIECES - Scale 1:2


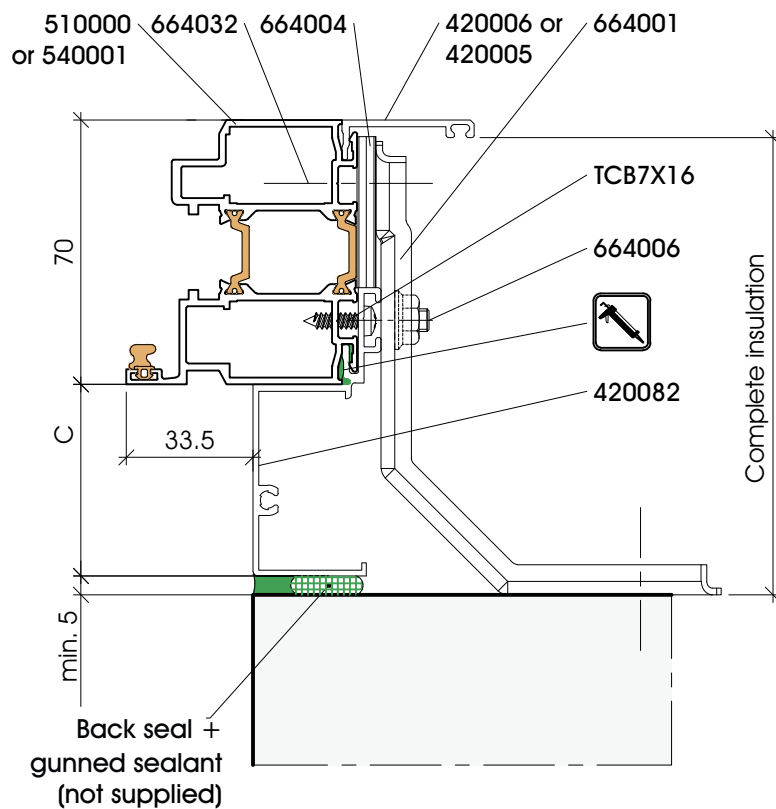


TABLE OF USE OF OFFSET SHUTTER PIECES AND FIXING LEGS


Complete insulation (mm)	Shutter piece ref.	Lug ref.	C
120	420082	664001	50.7
160	420084	664003	90.7

ARCHITRAVES - Scale 1:2


Architrave 420005

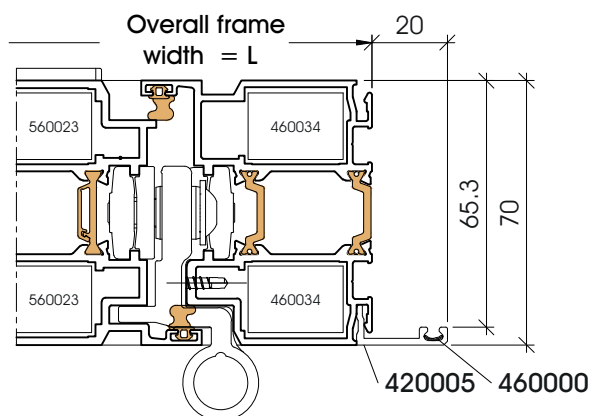


Architrave 420028

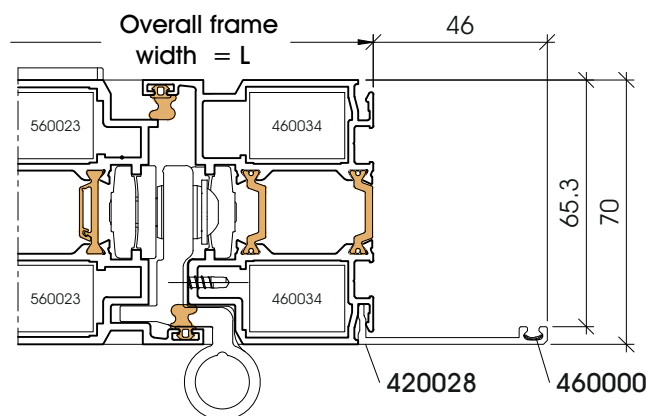


Architrave 420006

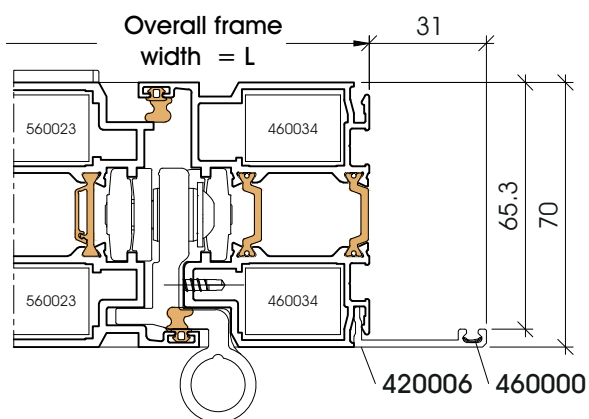

Architrave 420004

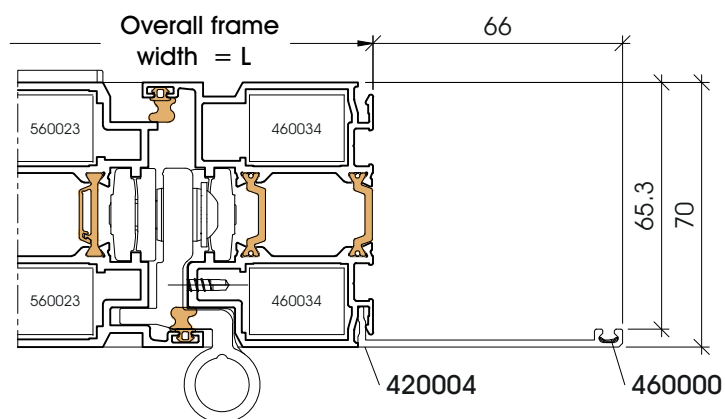


See our manufacturing drawings D5200 and D5201.

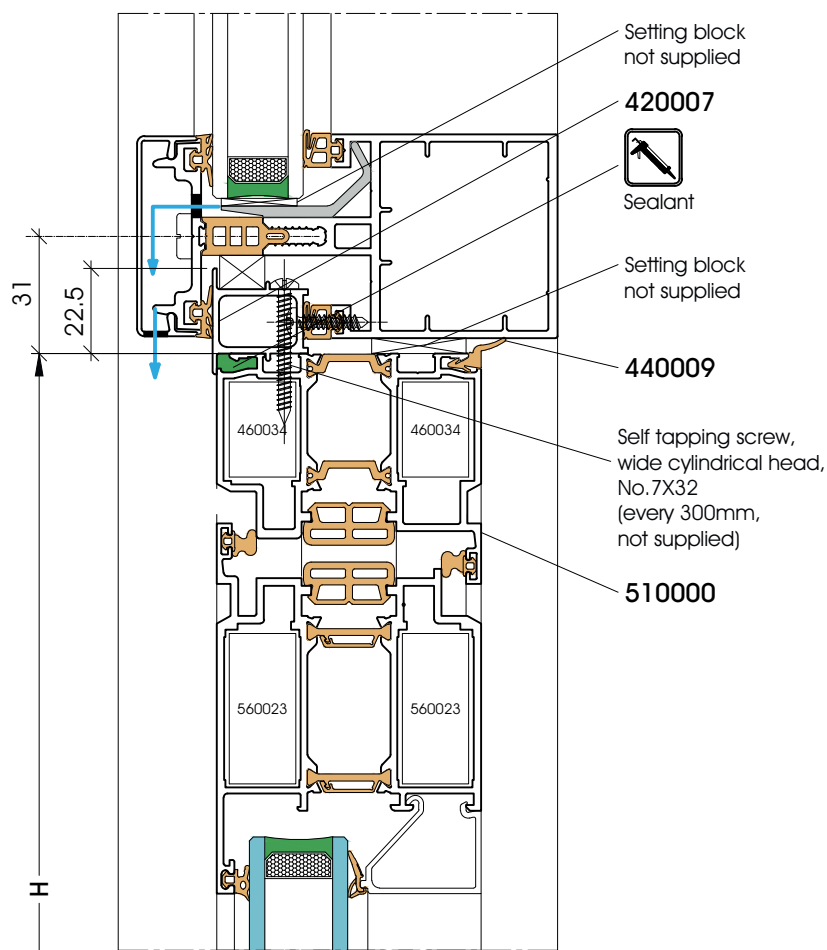



HEAT BARRIER - Scale 1:2

XPE foam thermal shield ref. 540008

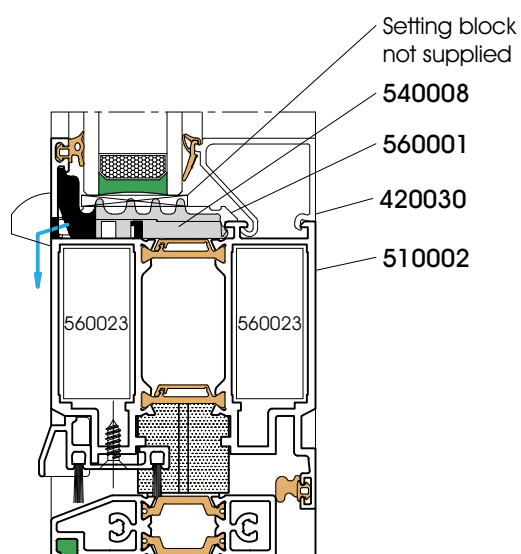



See our manufacturing drawings D5200 and D5201.

MIDDLE RAILS ON OPENING FRAME - Scale 1:2





Middle rail 410036

Middle rail 410033

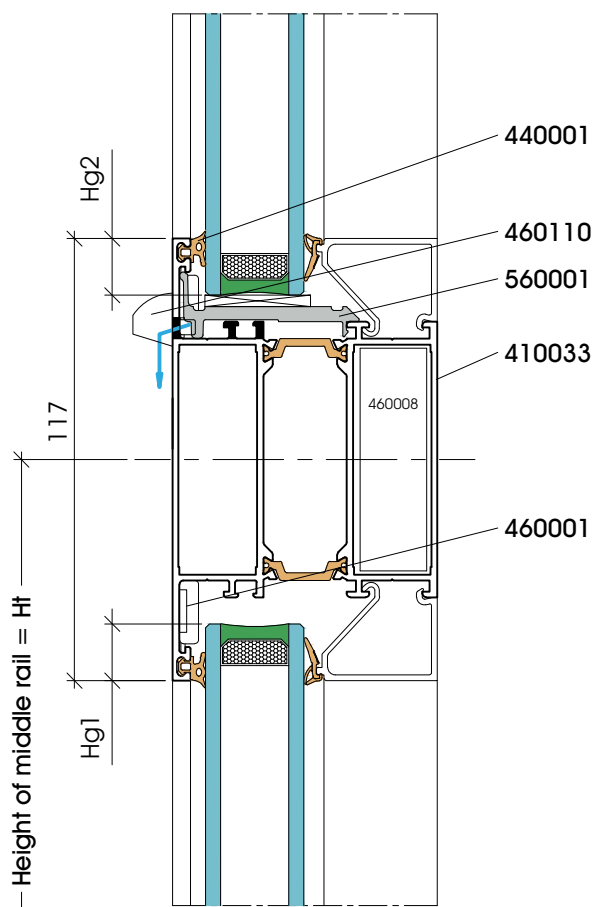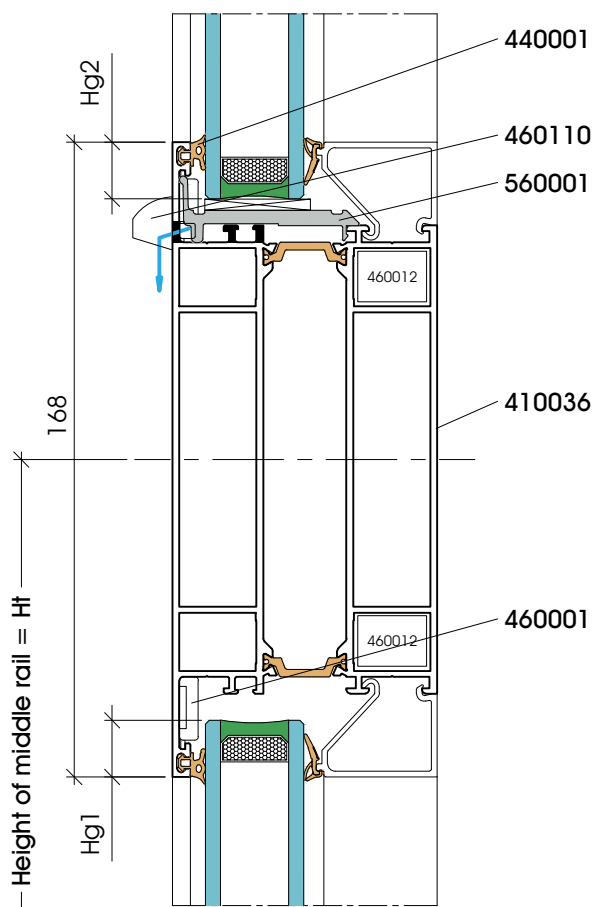



See our manufacturing drawings D5200 and D5201.

MIDDLE RAILS ON FIXED FRAME - Scale 1:2

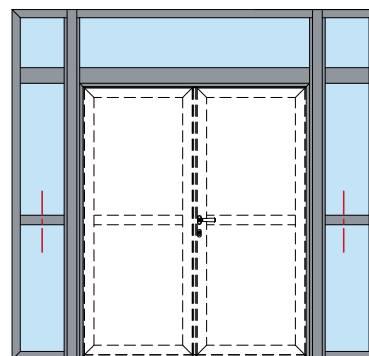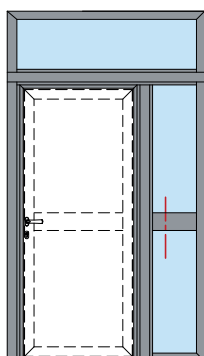


Middle rail 410036

Middle rail 410033

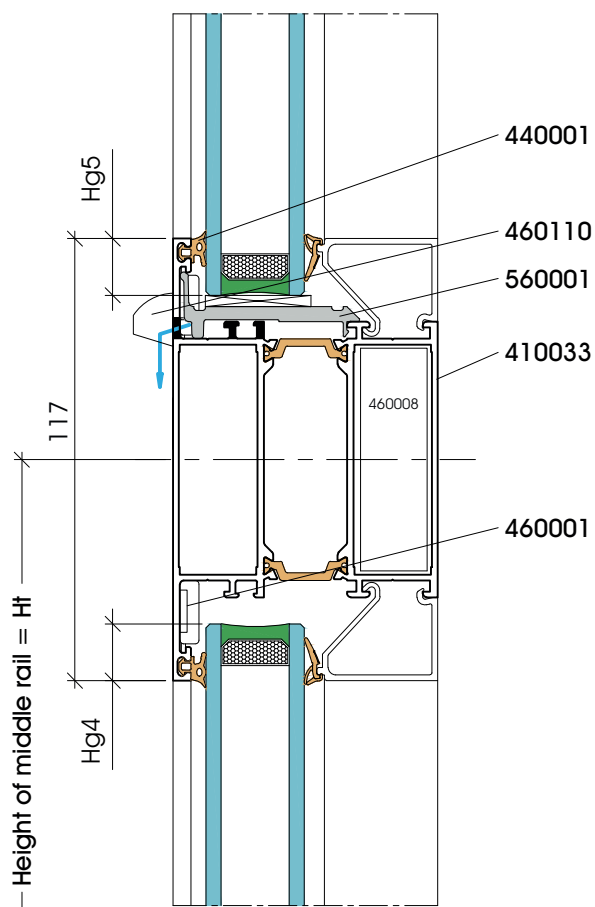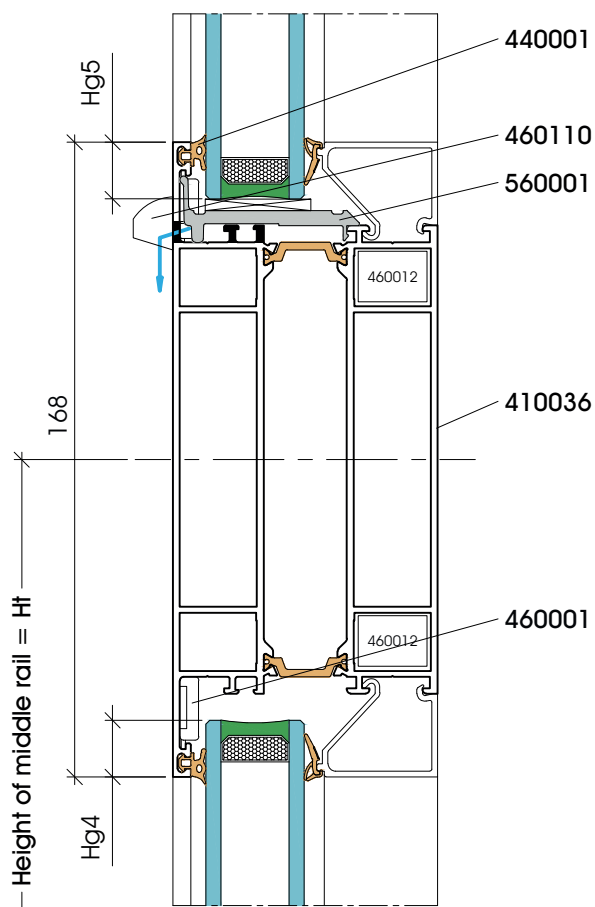


See our manufacturing drawings D5202 and D5203.


ELECTROMAGNETIC CATCH FOR SINGLE-LEAF DOOR - Scale 1:2



BB

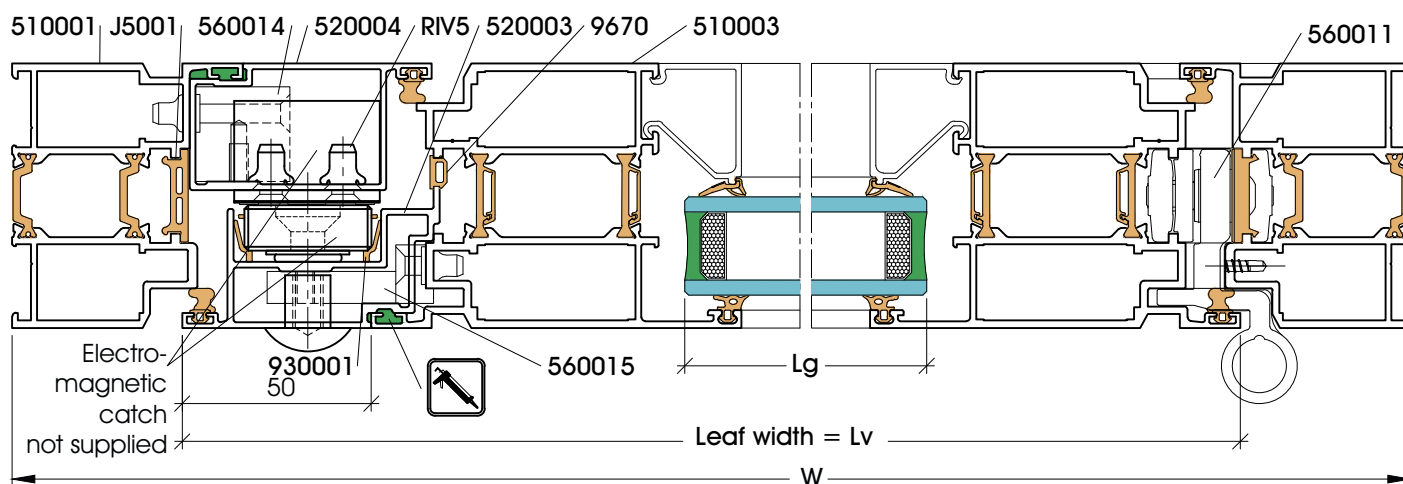


BB

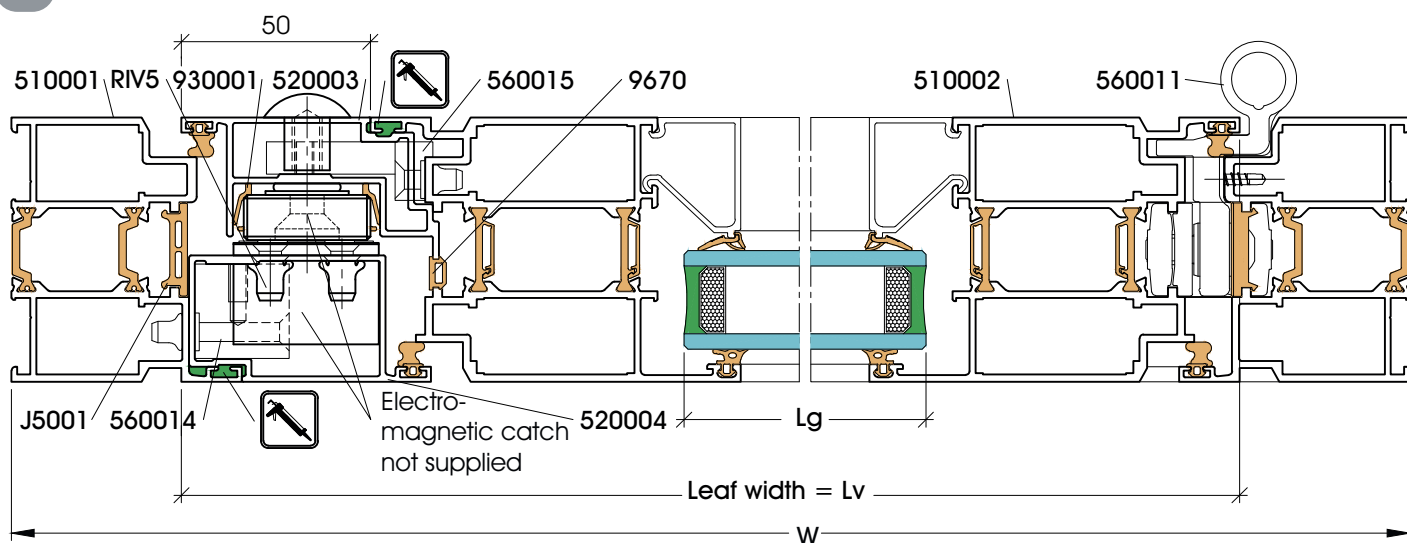


See our manufacturing drawing D5207.


STRIP HANDLE - Scale 1:2




AA

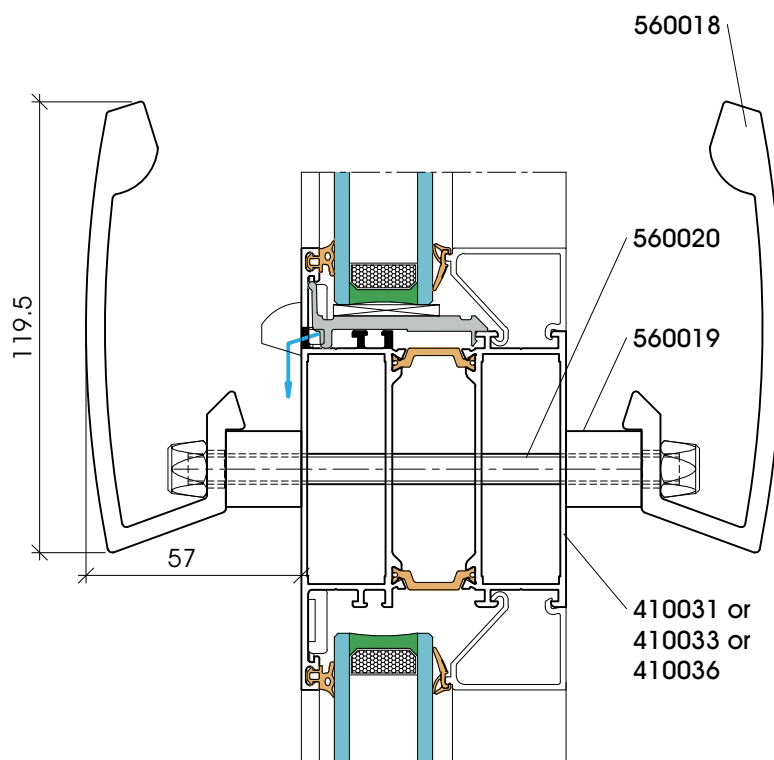

BB

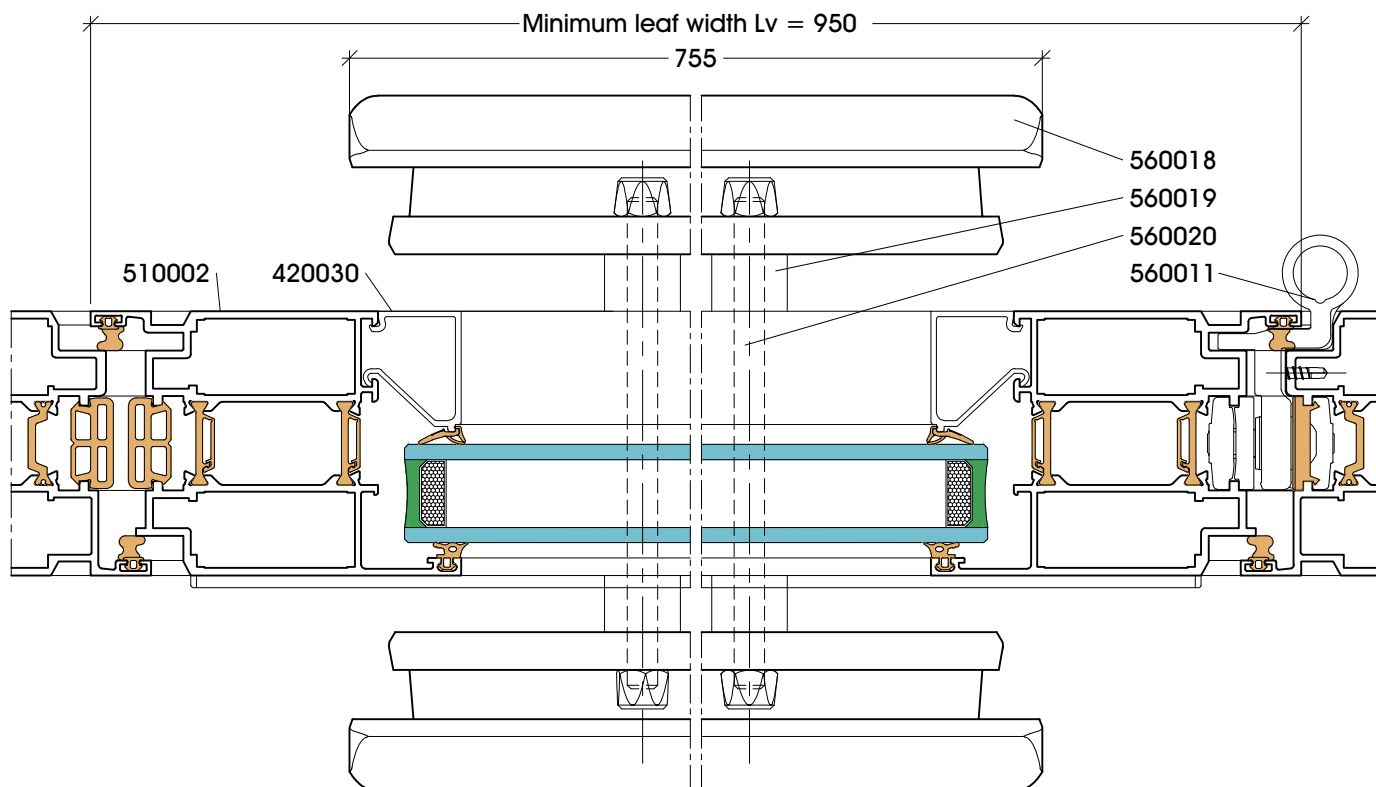


See our manufacturing drawing D5204.

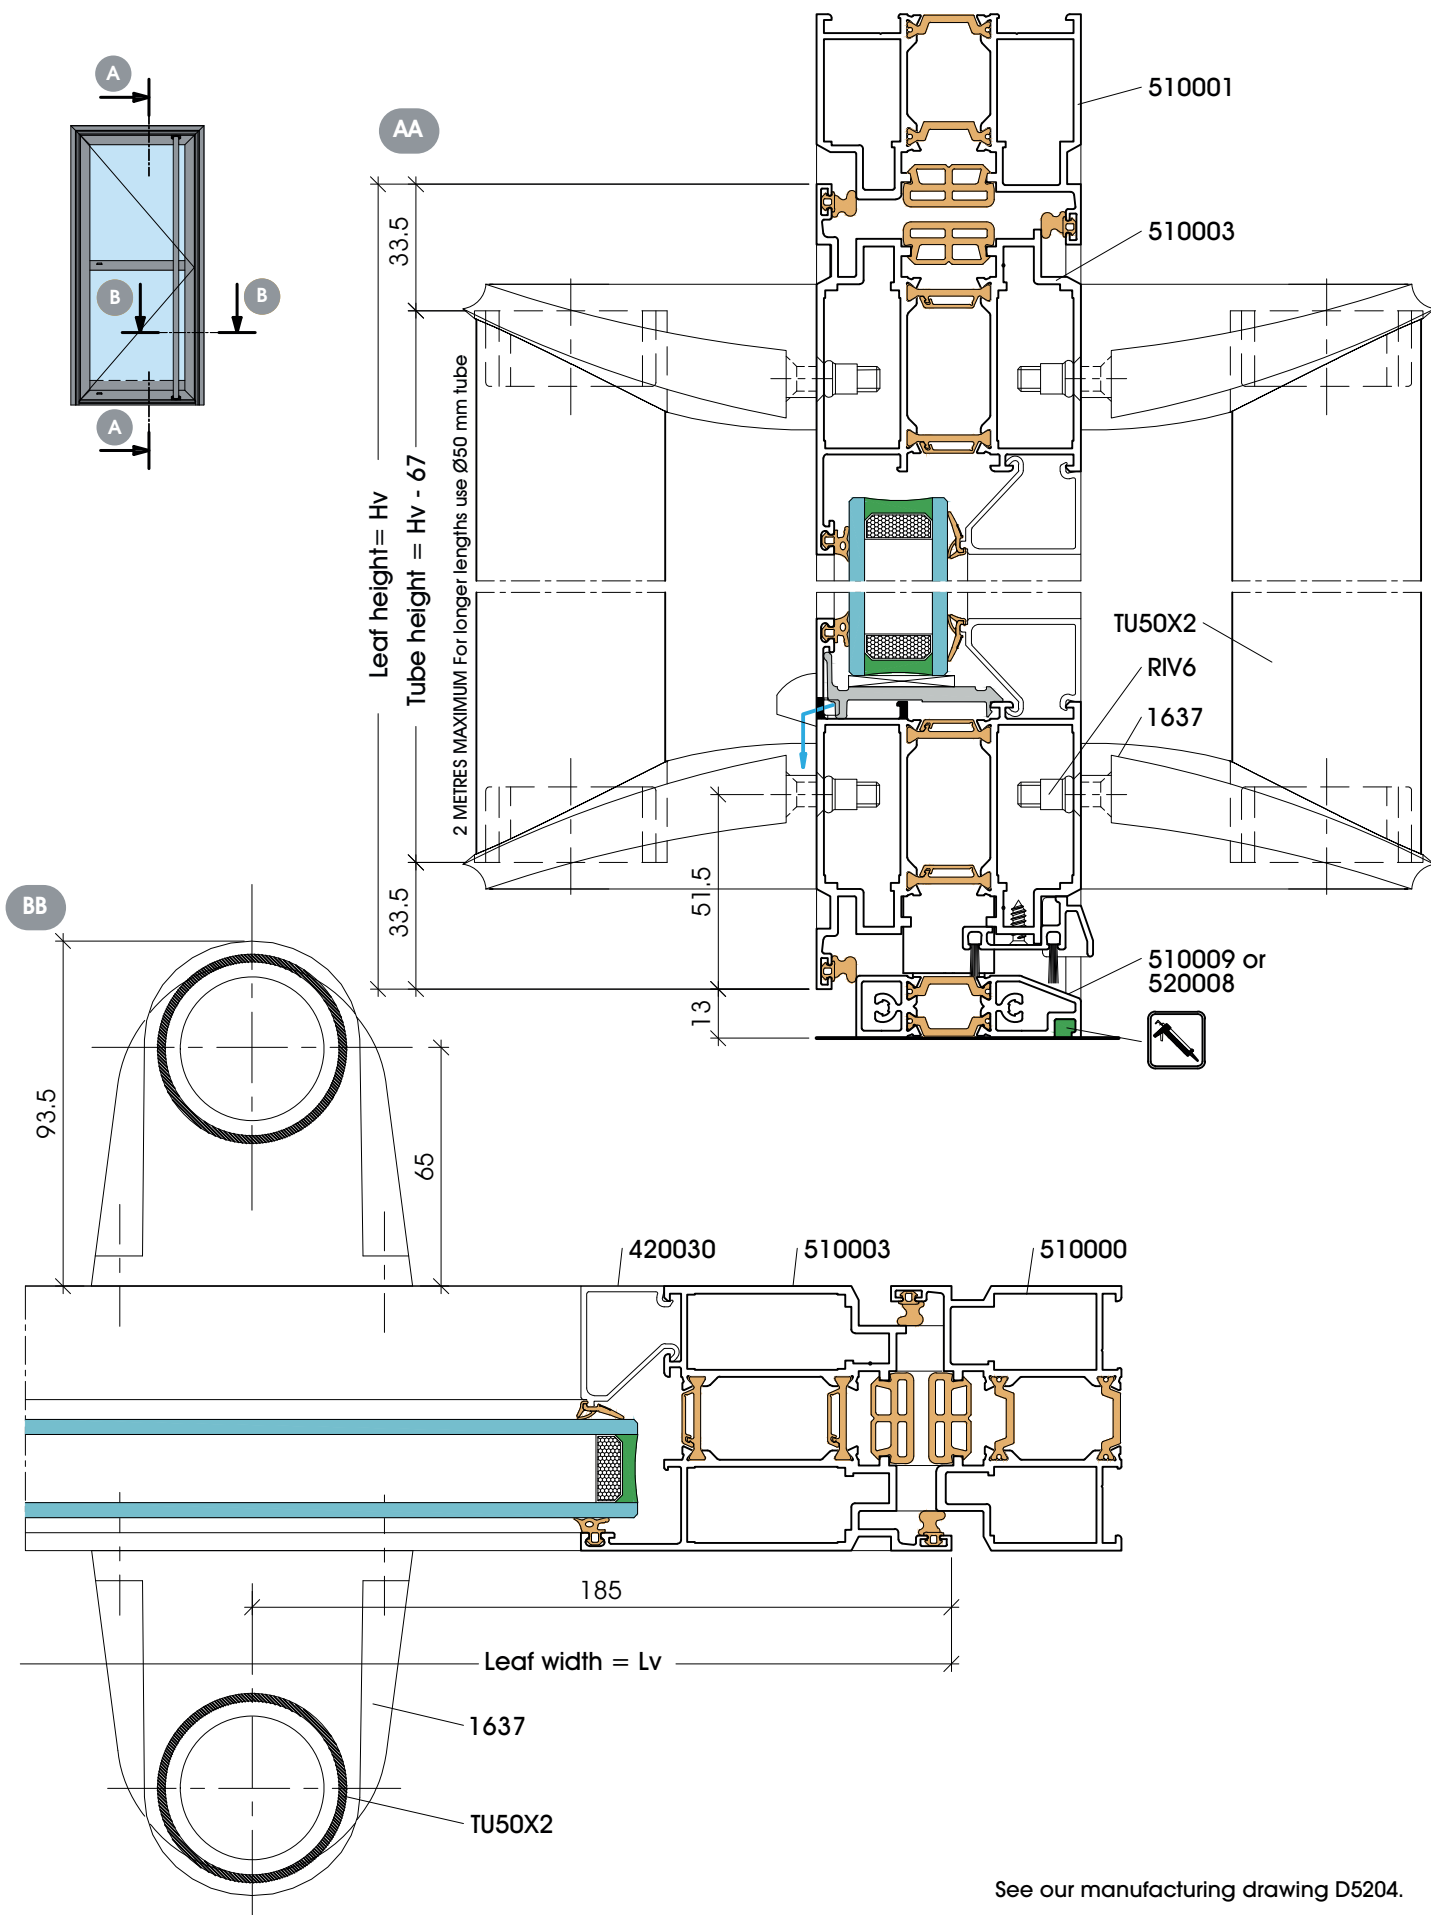


See our manufacturing drawing D5204.

TUBULAR HANDLE Ø40mm - Scale 1:2

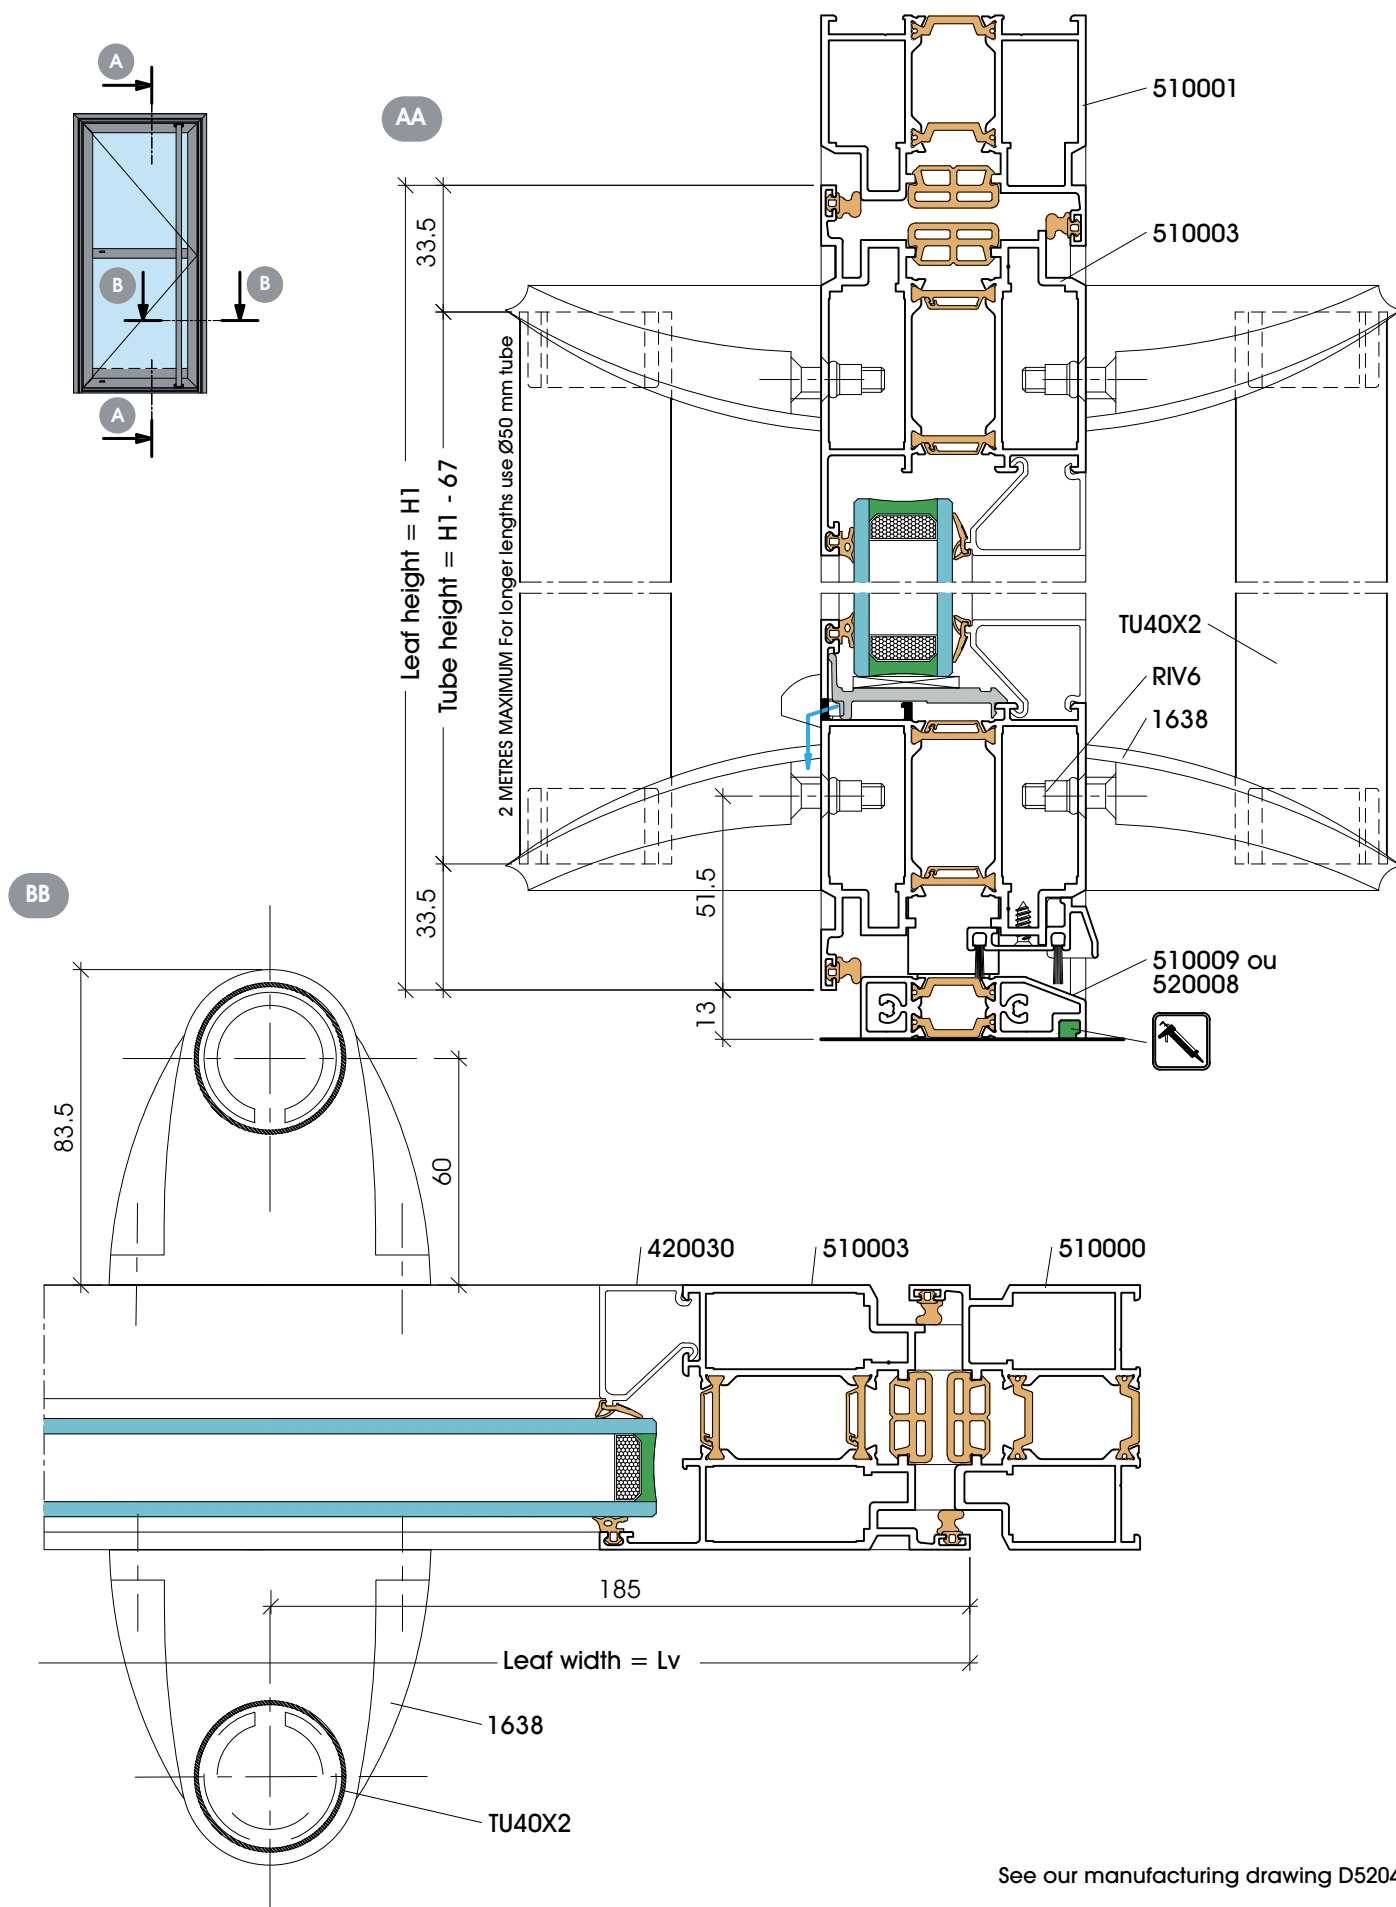

See our manufacturing drawing D5204.

PUNCHING TOOLS

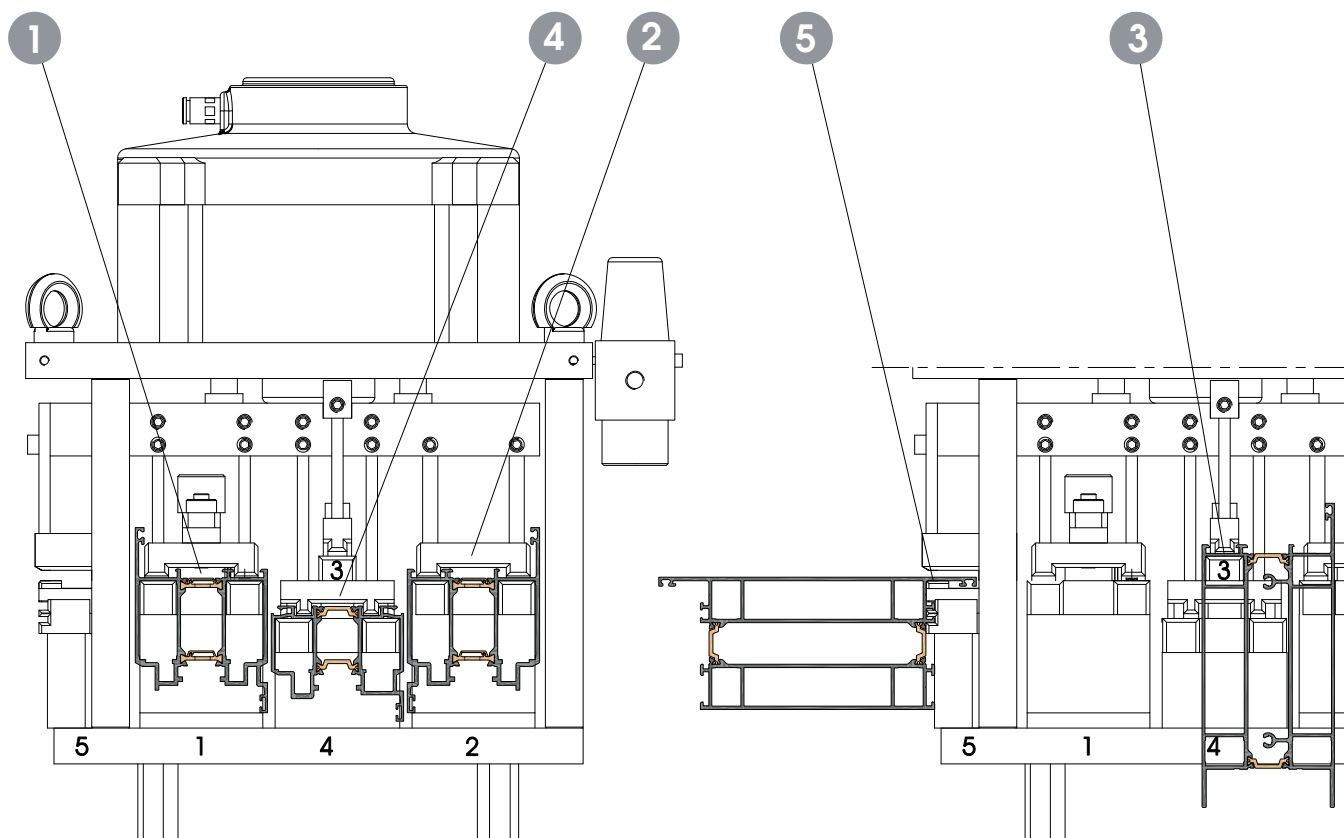


570000

Self contained tool comprising:

- Punch ram, force 1740kg at 6 bar
- Punch tools
- 1 blow gun
- Directional valve
- Operating pedal (pedal only **40077**)
- Adjustable stop
- Packaging
- Operating instructions



N.B., Read the instruction booklet before starting.
Lubricate the punches regularly with our lubricant **40051**.

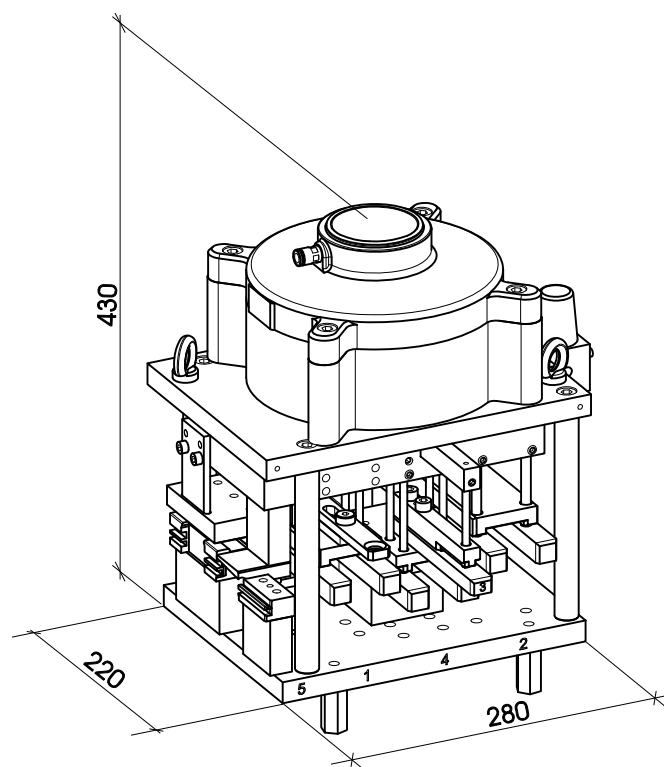

SPARE DIES AND PUNCHES

Machining operation	Punch		Die	
	Ref.	Item	Ref.	Item
1	5701P1 5702P1	Set of punches, position 1	5700M1	Die position 1
2	5701P2 5702P2	Set of punches, position 2	5700M2	Die position 2
3	5700P3	Set of punches, position 3	5700M3	Die positions 3
4	5701P4 5702P4	Set of punches, position 4	570GM4 570DM4	Die position 4
5	5701P5 5702P5	Set of punches, position 5	570GM5 570DM5	Die position 5



PUNCHING TOOLS

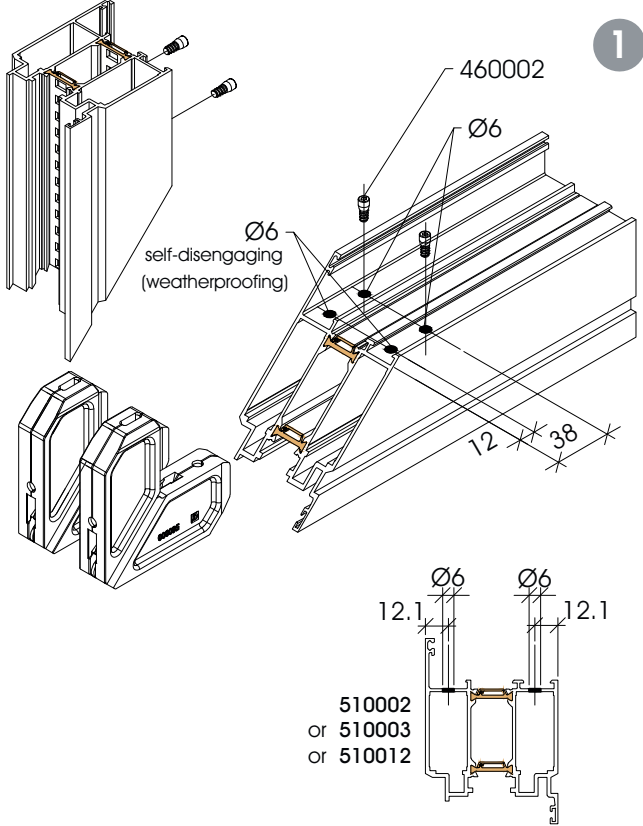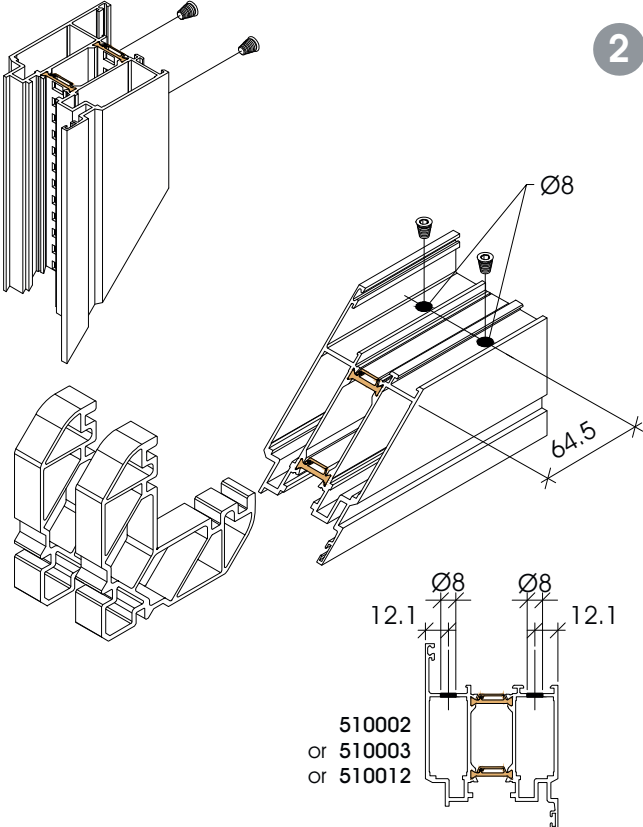PARTS LIST		
Item & reference	Machining	Sections
Screw-on corner cleat machining OPENING FRAME ref. 560000	 460002 Ø6 Ø6 self-disengaging (weatherproofing) 12 38 Ø6 12.1 510002 or 510003 or 510012 1	OPENING FRAMES: 510002 - 510003 510012
Screw-on corner cleat machining OPENING FRAMES refs. 560023 & 560028	 Ø8 12.1 64.5 Ø8 12.1 510002 or 510003 or 510012 2	OPENING FRAMES: 510002 - 510003 510012



PUNCHING TOOLS

PARTS LIST		
Item & reference	Machining	Sections
Assembly block machining 460008 - 460012 - 560022	Ø6 36 11.9 Ø6 410034 or 410033 410036 510005 or 510004 410032 or 410031	RAILS: 410031 - 410032 - 410033 410034 - 410036 FIXED FRAMES: 510004 - 510005




PUNCHING TOOLS

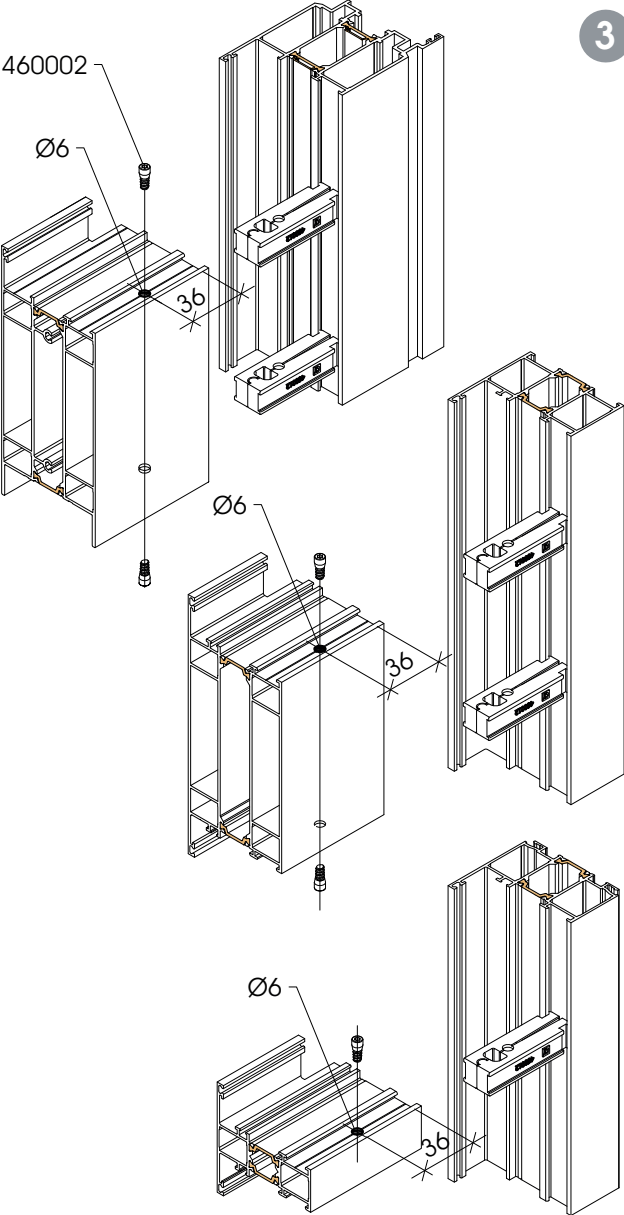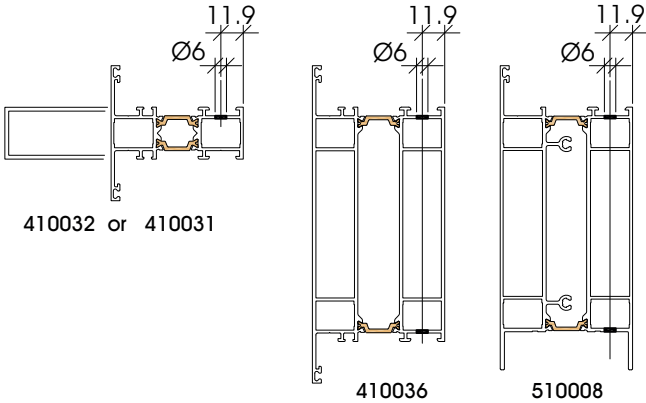PARTS LIST		
Item & reference	Machining	Sections
Assembly block machining: 460012	 	RAILS: 410031 - 410032 410036 - 510008




PUNCHING TOOLS

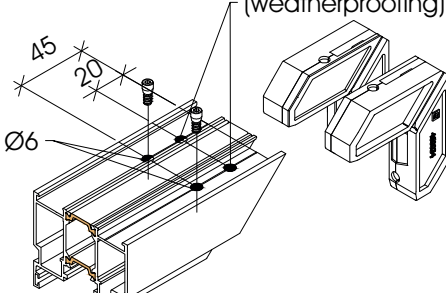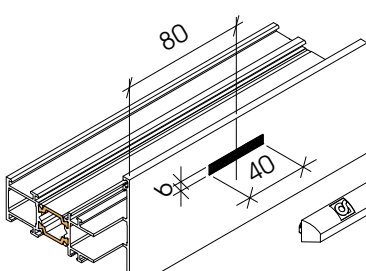PARTS LIST		
Item & reference	Machining	Sections
Machining the screw-on bracket FIXED FRAME: 460034	Ø6 self-disengaging (weatherproofing) 45 20 Ø6  16.8 16.8 Ø6 Ø6 410004 16.8 16.8 Ø6 Ø6 510004 or 510005 or 510010 16.8 16.8 Ø6 Ø6 510000 or 510001 or 510013 or 510015	FIXED FRAMES: 410004 - 510000 - 510001 510004 - 510005 - 510010 510013 - 510015
Drainage hole & deflector machining 460110	80 40 Ø6  20 40 Ø6 510004 or 510005 410031 or 410033 or 410036 510008 510002 or 510003 or 510012 410004	FIXED FRAMES: 410004 - 410031 - 410033 410036 - 510004 - 510005 OPENING FRAMES: 510002 - 510003 - 510008 510012





DRILLING TEMPLATES

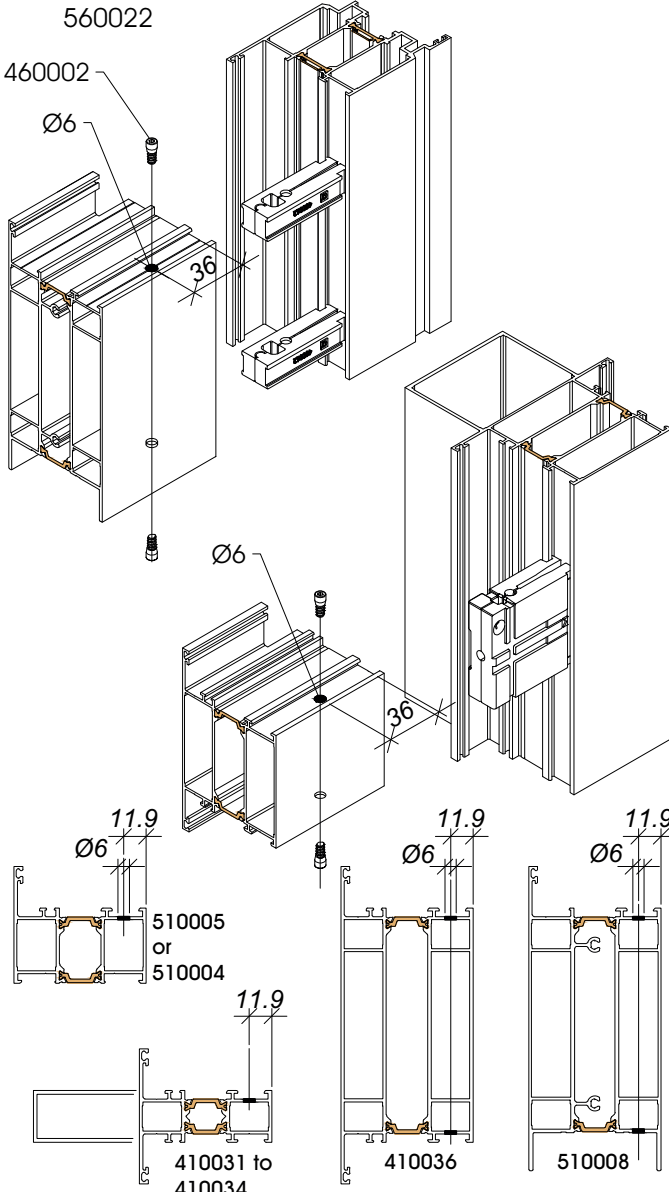PARTS LIST		
Item & reference	Machining	Sections
 470012 Drilling template for fixed frame corner cleat N.B.: This template can be replaced by tool ref. 570000 	C Machining of assembly blocks 460008-460012 560022  460002 Ø6 36 Ø6 36 11.9 Ø6 11.9 Ø6 11.9 510005 or 510004 410031 to 410034 410036 510008	RAILS: 410031 - 410033 410034 - 410036 FIXED FRAMES: 410031 - 410033 - 410036 510004 - 510005 OPENING FRAME: 510008

DRILLING TEMPLATES

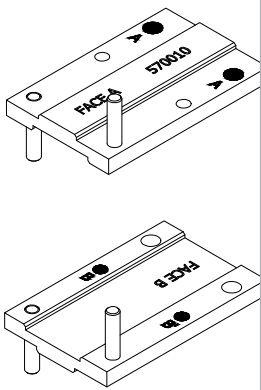
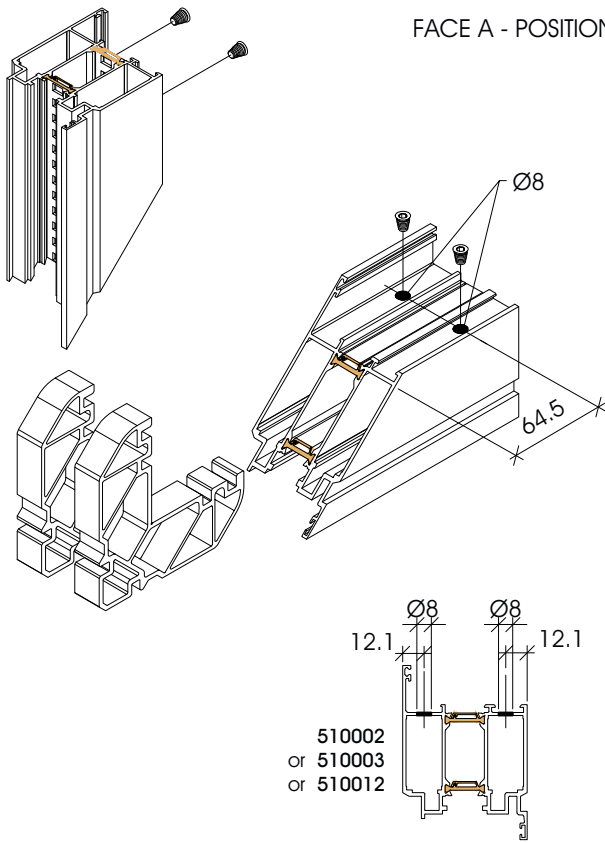
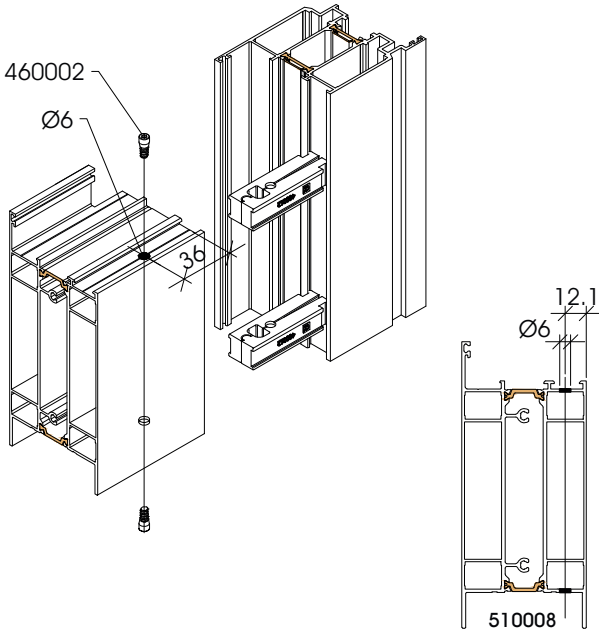
PARTS LIST		
Item & reference	Machining	Sections
 570010 Drilling template for opening frame corner clec ref. 560023 and 560028 assembly blocks ref. 460008, 460012 and 560022 N.B., This template can be replaced by tool ref. 570000	FACE A - POSITION A  510002 or 510003 or 510012	OPENING FRAMES: 510002 - 510003 510012
	FACE B - POSITION B OR B'  510008	FIXED FRAMES: 510004 - 510005 - 510010 MULLIONS: 410031 - 410032 - 410033 410034 - 410036 - 410037 SILL: 510008

DRILLING TEMPLATES

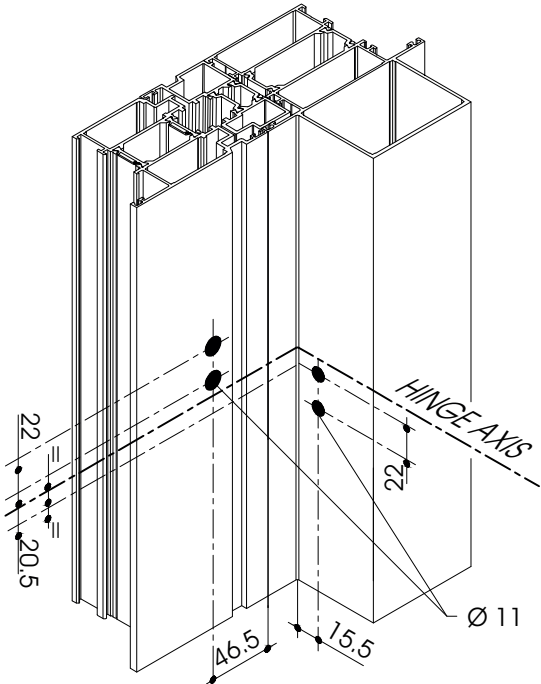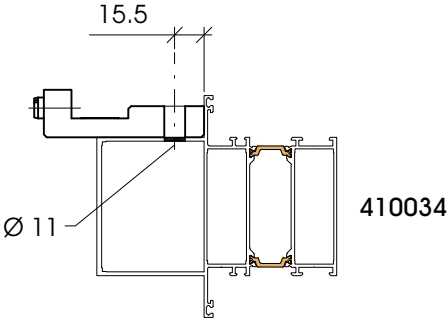
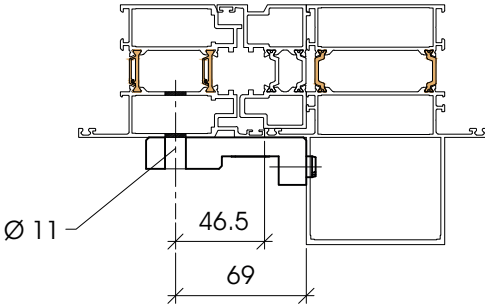
PARTS LIST		
Item & reference	Machining	Sections
 570019 Drilling template for two-branch corner hinges, ref. A5084	  510003 or 510002 510007 410034 	MULLION: 410034 OPENING FRAMES: 510002 - 510003 ADD-ON CENTRE MULLION: 510007

DRILLING TEMPLATES



PARTS LIST

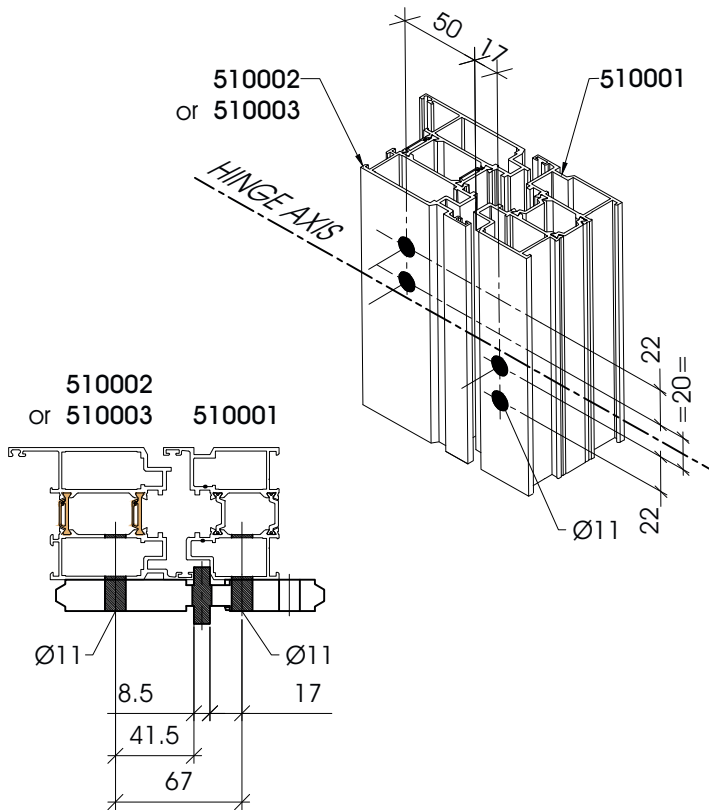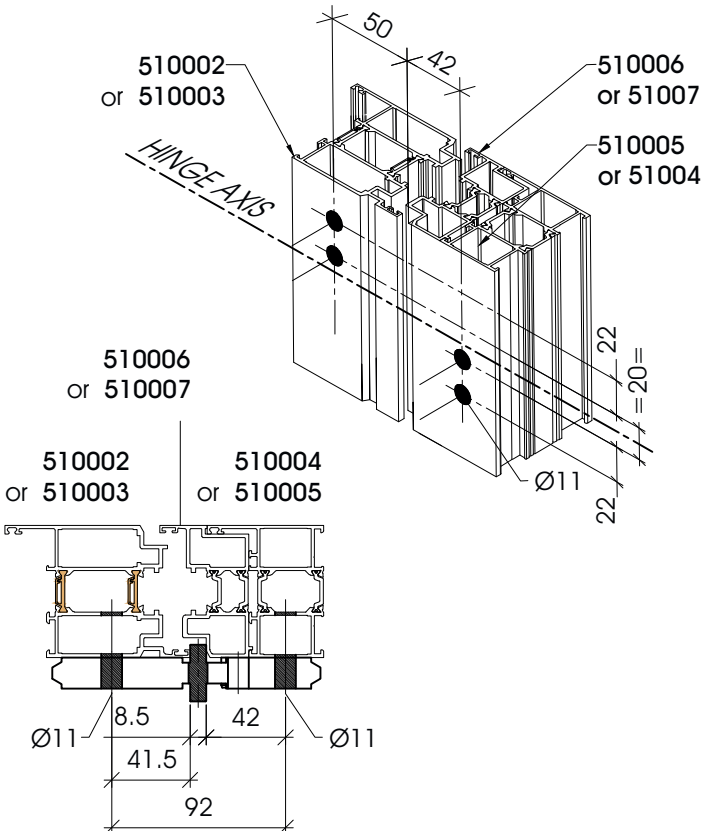Item & reference	Machining	Sections
Drilling template for two-branch hinges, ref. A5080  570020 Drilling template for two-branch hinges, ref. A5080	 510002 or 510003 510001 HINGE AXIS 50 17 22 22 = 20 = Ø11 8.5 17 41.5 67	FIXED FRAMES: 510001 OPENING FRAMES: 510002 - 510003
Drilling template for two-branch hinges, ref. A5080	 510002 or 510003 510006 or 510007 HINGE AXIS 50 42 22 22 = 20 = Ø11 8.5 42 41.5 92 510002 or 510003 510004 or 510005	FIXED FRAMES: 510004 - 510005 510006 - 510007 OPENING FRAMES: 510002 - 510003











DRILLING TEMPLATES

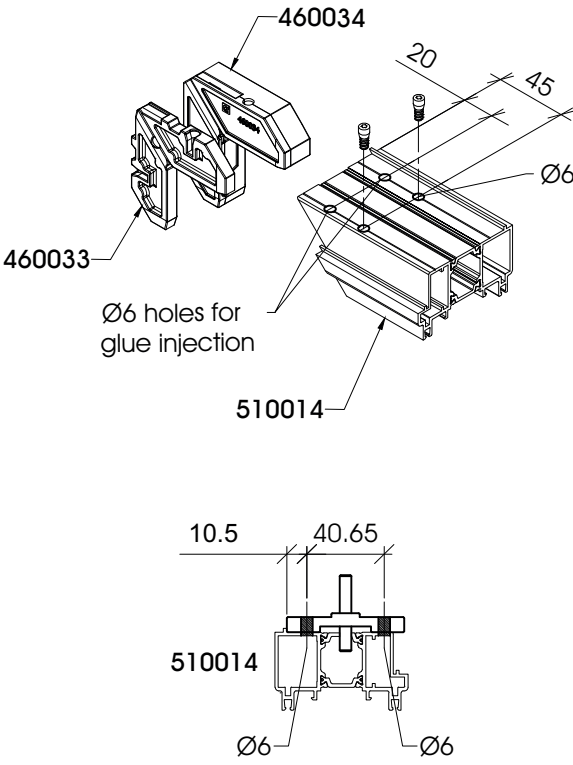PARTS LIST		
Item & reference	Machining	Sections
 570022 Drilling template for corner cleat ref. 460034 corner cleat ref. 460033	 460034 20 45 Ø6 460033 Ø6 holes for glue injection 510014 10.5 40.65 510014 Ø6 Ø6	FIXED FRAME: 510014



DRILLING TEMPLATES

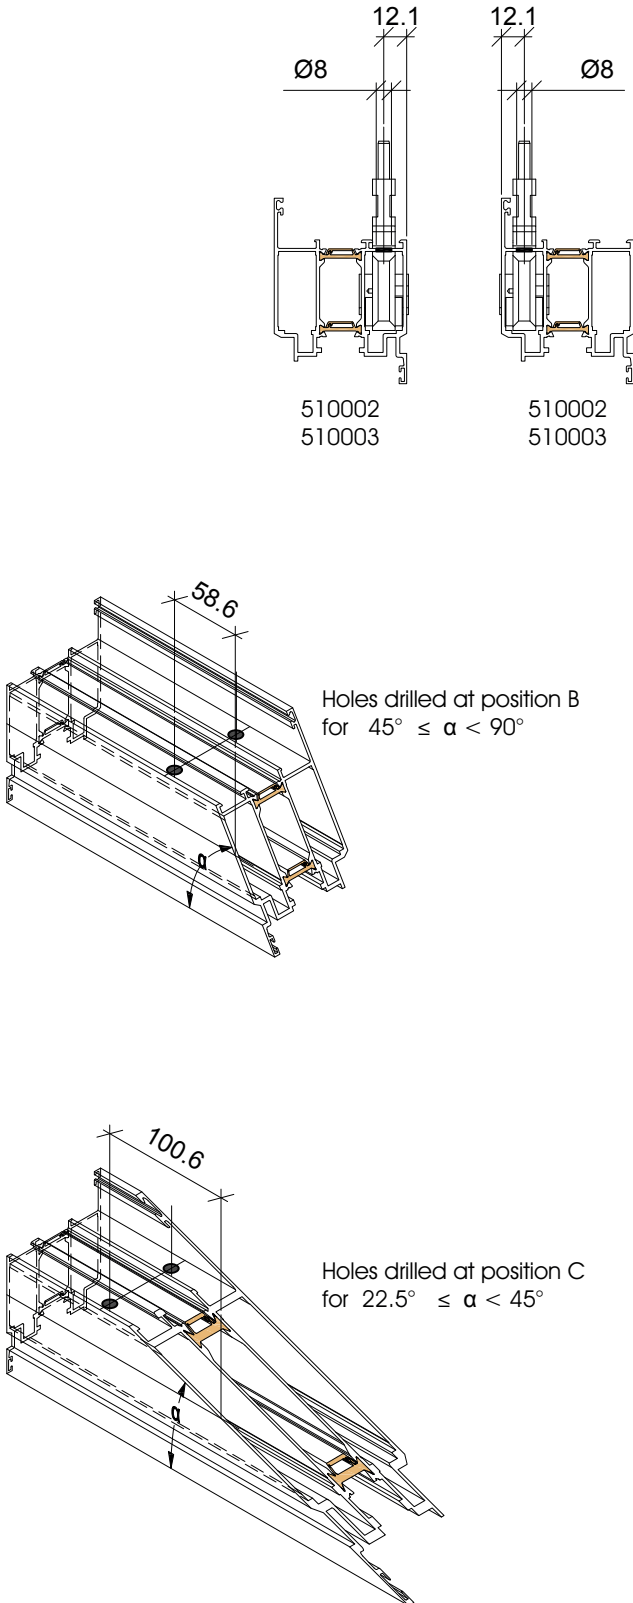PARTS LIST		
Item & reference	Machining	Sections
 F5008 Drilling template for variable block ref. 460013 + F5011 Drilling template adapter	 510002 510003 510002 510003 58.6 Holes drilled at position B for $45^\circ \leq \alpha < 90^\circ$ 100.6 Holes drilled at position C for $22.5^\circ \leq \alpha < 45^\circ$	OPENING FRAMES: 510002 - 510003











DRILLING TEMPLATES

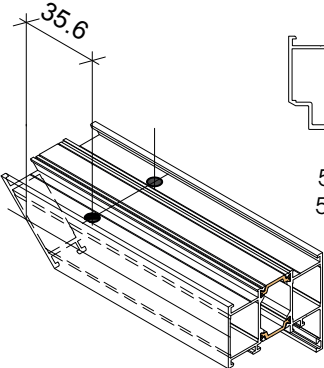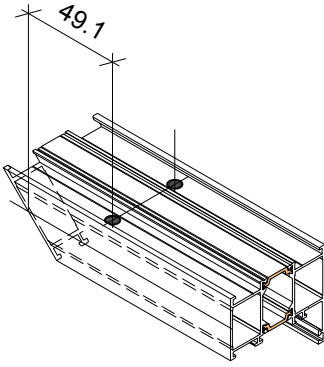PARTS LIST		
Item & reference	Machining	Sections
 F5007 Drilling template for variable cleat ref. 460014 + F5011 Drilling template adapter	   510001 510000   510005 510004	FIXED FRAMES: 510000 - 510001 510004 - 510005
 F5009 Drilling template for variable block ref. 460015 + F5011 Drilling template adapter	   510005 510004	FIXED FRAMES: 510004 - 510005










COPY TEMPLATES

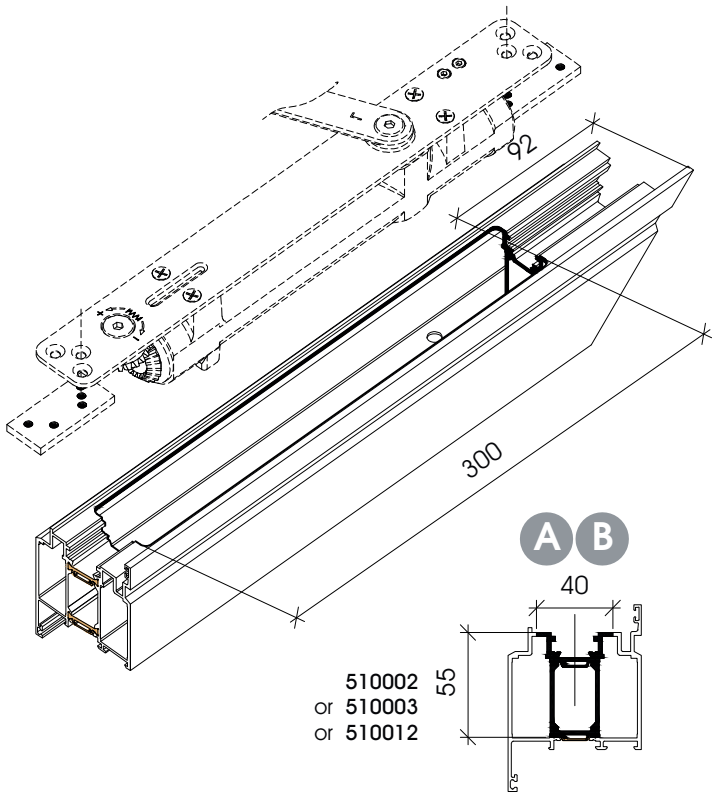PARTS LIST		
Item & reference	Machining	Sections
 570002 Copy template for locks 550020 - 550022, recessed door closer 550001	 510002 or 510003 or 510012	OPENING FRAMES: 510002 - 510003 510012




COPY TEMPLATES

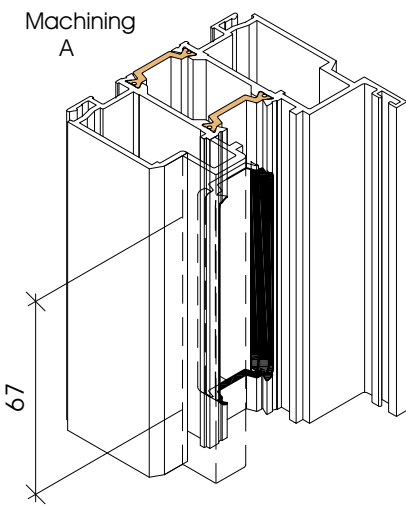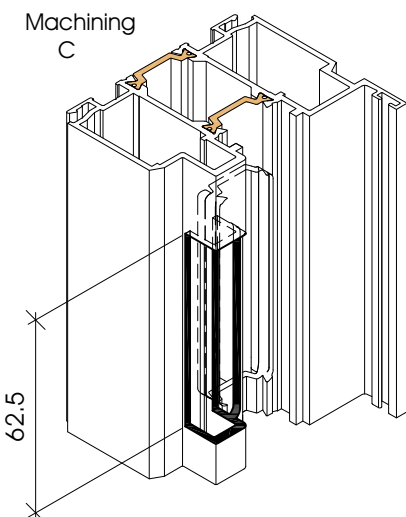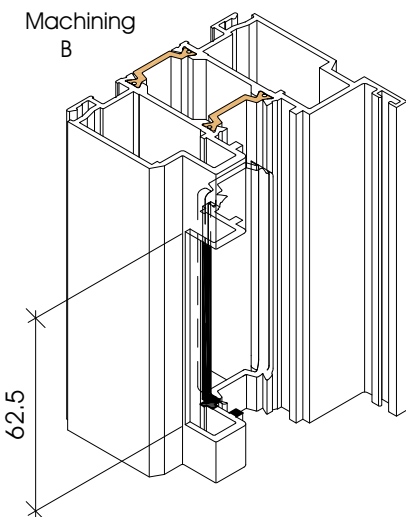PARTS LIST		
Item & reference	Machining	Sections
 570004 Copy template for electric strike 550055	Machining A  67	FIXED FRAME: 510000 OPENING FRAME: 510003  20 510000  20 510003
	Machining C  62.5	 14.5 11.5 510000  14.5 11.5 510003
	Machining B  62.5	 14.5 16.5 510000  14.5 16.5 510003






COPY TEMPLATES

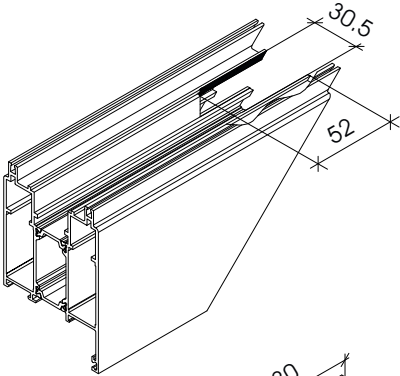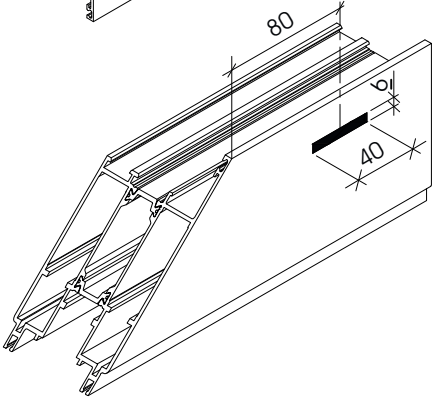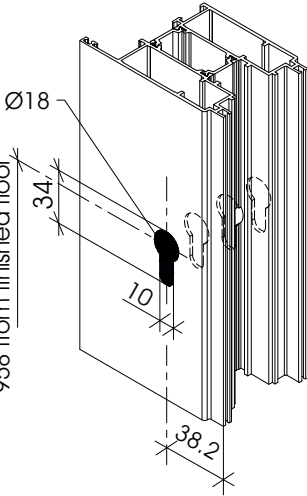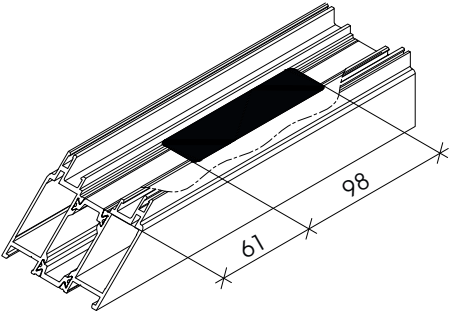PARTS LIST		
Item & reference	Machining	Sections
 570012 Copy template for cantilever arm 5670, lintel pivot 5721, lock cylinder and drain hole	   	 510012  510012  510012  510013 FIXED FRAME: 510013 OPENING FRAME: 510012




COPY TEMPLATES

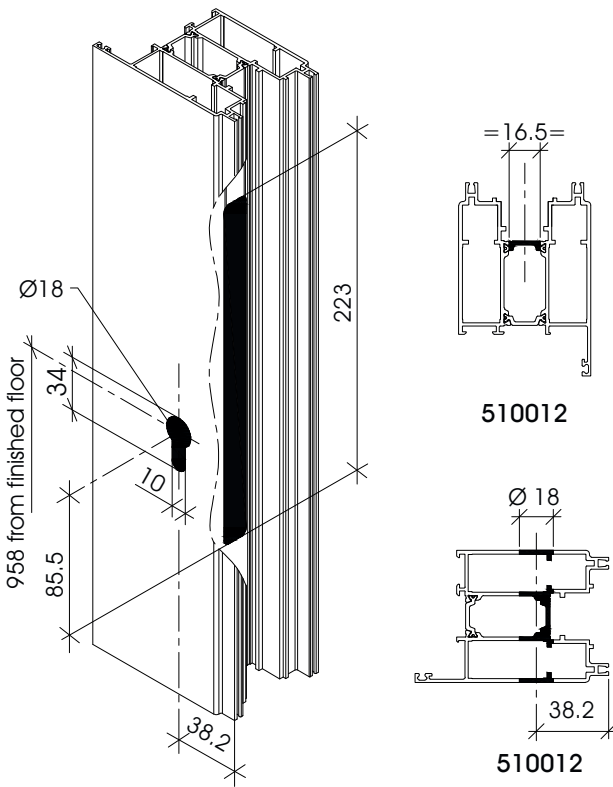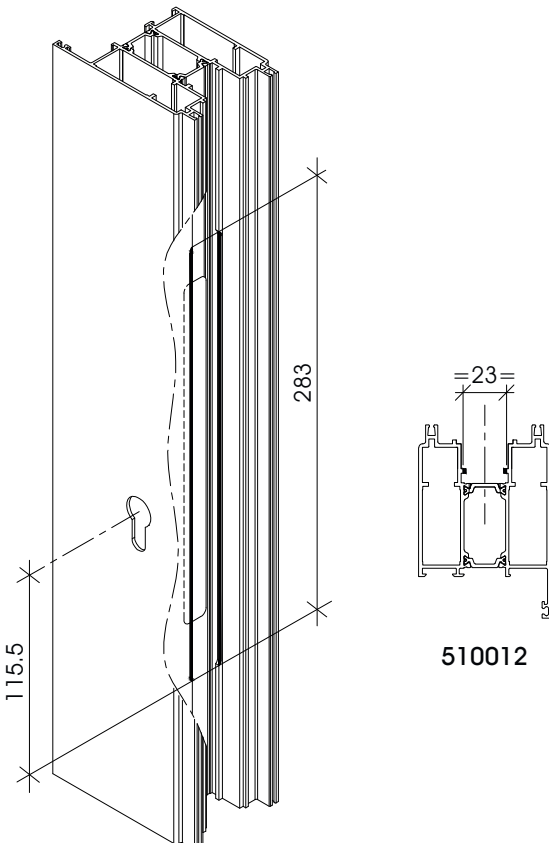PARTS LIST		
Item & reference	Machining	Sections
 570015 Copy template for lock 550018	 510012	OPENING FRAME: 510012
	 510012	

COPY TEMPLATES

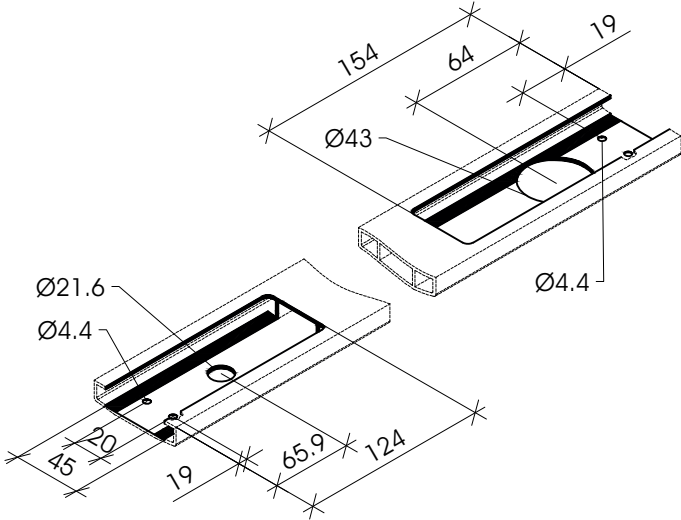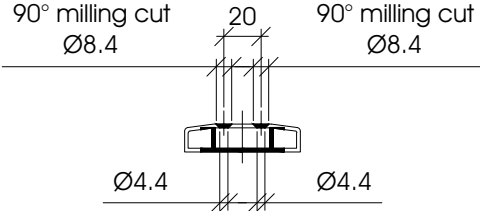PARTS LIST		
Item & reference	Machining	Sections
     570023 Copy template for floor pivot plate assembly ref. 550082 barrel ref. 550086 end piece for pivot plate side ref. 560040 end piece for lock side ref. 560041		SILL: 520015





COPY TEMPLATES

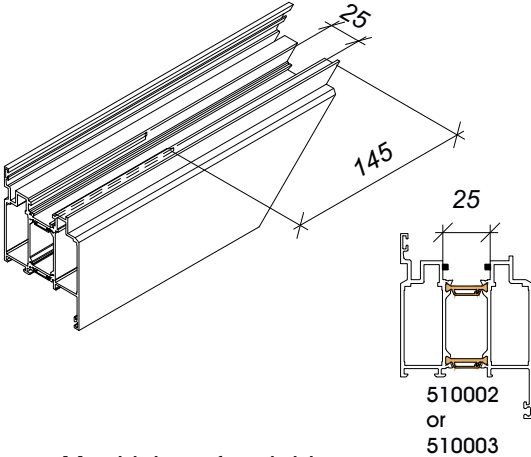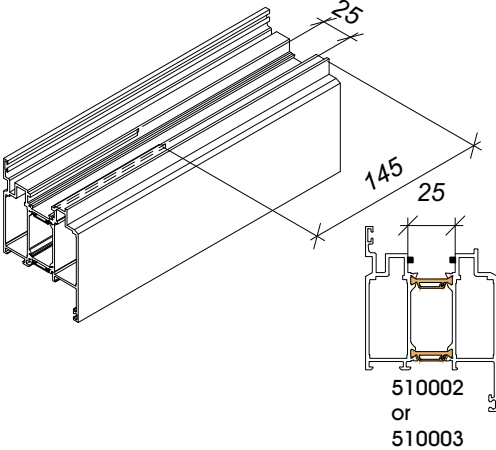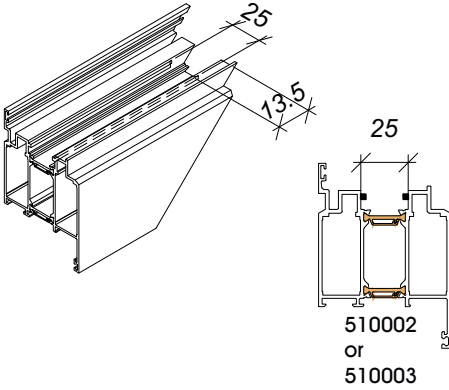PARTS LIST		
Item & reference	Machining	Sections
 570024 Copy template for semi-fixed lockbolt ref. 550037R	Machining of upright on opening frame edge  510002 or 510003	OPENING FRAMES: 510002 - 510003
	Machining of upright on opening frame with kick plate  510002 or 510003	
	Machining of bottom rail on opening frame edge  510002 or 510003	




PARTS LIST



COPY TEMPLATES

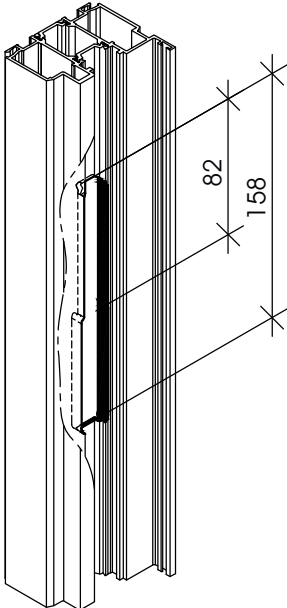PARTS LIST		
Item & reference	Machining	Sections
 570026 Copy template for A5094, A5095 + actuator for locks A5063N, A5065N	 Machining for daytime latch and magnet clearance for automatic locks  510000 or 510001  510002 or 510003	FIXED FRAMES: 510000 - 510001 OPENING FRAMES: 510002 - 510003





COPY TEMPLATES

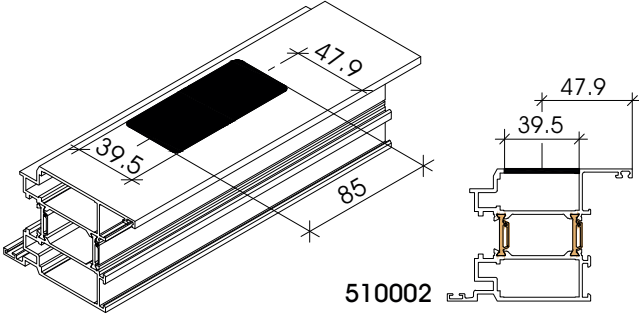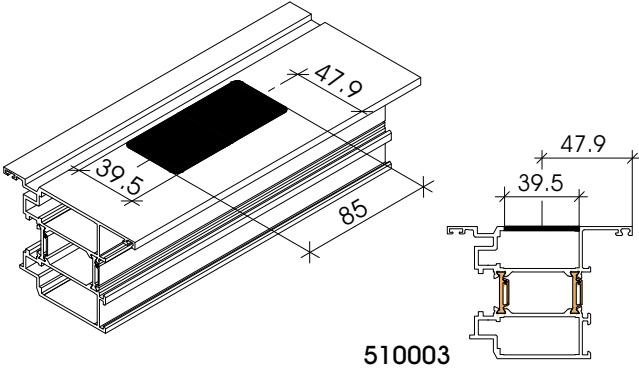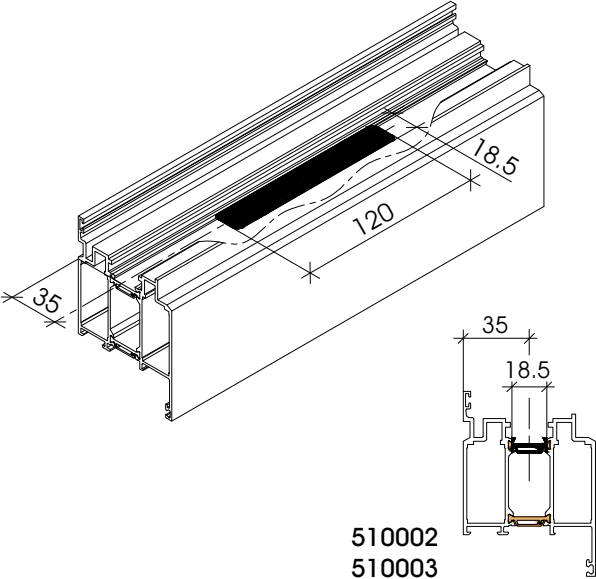PARTS LIST		
Item & reference	Machining	Sections
 570027 Copy template biometric scanner	Machining for fingerprint scanner A  510002	510002 510003
	 510003	
	Machining of electronics case B  510002 510003	510002 510003

COPY TEMPLATES

Item & reference	PARTS LIST	Sections
F5001N Copy template for locks ref. A5023 A5025, A5027	For ref. A5025, A5027 510002 or 510003 For ref. A5025, A5027	OPENING FRAMES: 510002 - 510003










COPY TEMPLATES

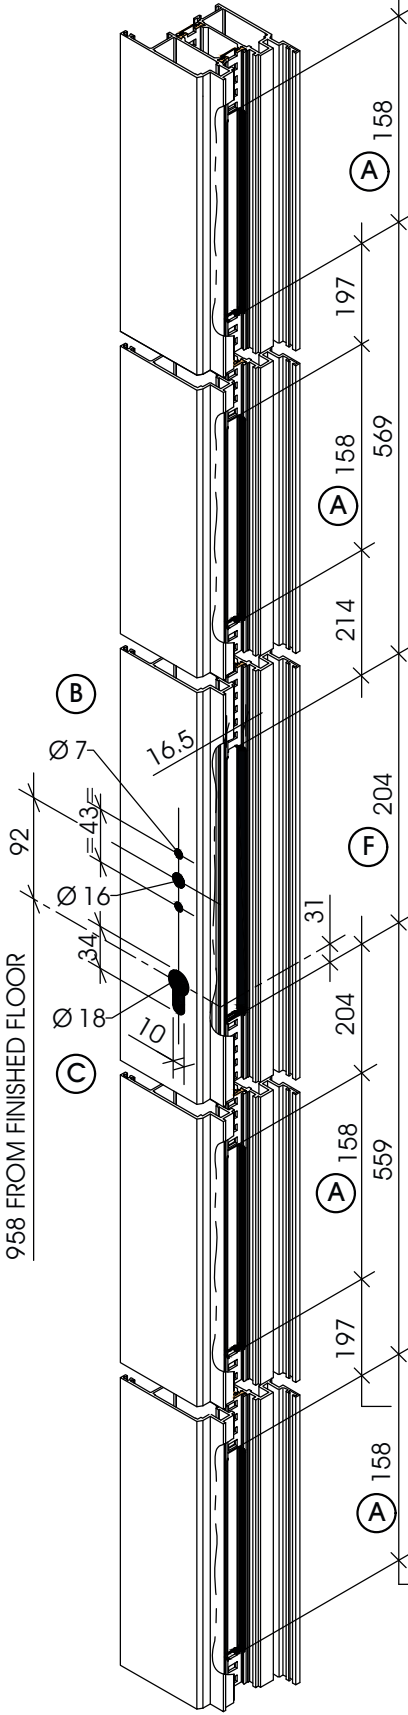PARTS LIST		
Item & reference	Machining	Sections
 F5001N Copy template for locks ref. A5061N, A5062N, A5063N A5065N, A5096	 958 FROM FINISHED FLOOR Ø 7 Ø 16 Ø 18 10 34 43 16.5 31 204 559 197 158 569 214 158 197 158 (A) (A) (A) (B) (C) (F) (A)	OPENING FRAMES: 510002 - 510003  16.5 510002 or 510003  45.5 30 Ø 18 Lock ref. A5062N Locks ref. A5061N, A5063N A5065, A5096


COPY TEMPLATES

Item & reference	PARTS LIST	Sections
F5001N Copy template for lock ref. 550018, rail drainage		OPENING FRAME: 510012 FIXED FRAMES: 510004 - 510005 510010 MULLIONS: 410031 - 410033 410036 OPENING FRAMES: 510002 - 510003 510012 SILL: 510008


SAWING BLOCK

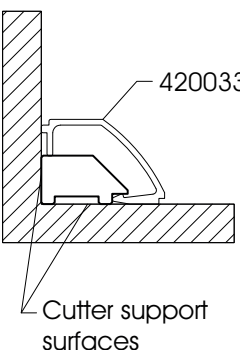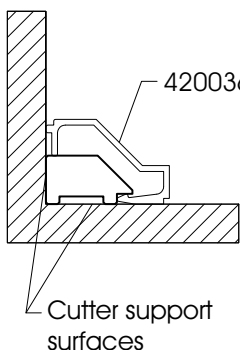PARTS LIST		
Item & reference	Machining	Sections
 472000 Cutting block kit for 26 mm glazing bead POM	 	420035 - 420038
 472001 Cutting block kit for 29 mm glazing bead POM	 	420034 - 420037
 472002 Cutting block kit for 32 mm glazing bead POM	 	420033 - 420036


ACCESSORIES

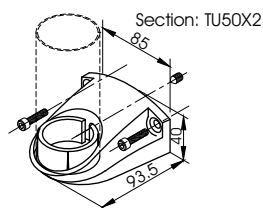


1637
Ø 50 mm tubular
handle attachment
Powder-coated aluminium

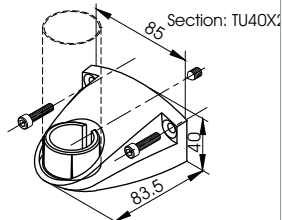


1638
Ø 40 mm tubular
handle attachment
Powder-coated aluminium




1817
Push-down stopper
Locking stroke 30 mm
Aluminium




1827
Self-adhesive keyhole
Aluminium




1828
Ø 8 mm locking bar
Galvanised steel

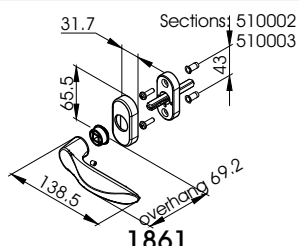


1861
FLOW paired lever handles
8 mm square spindle
Zamak, polyamide base

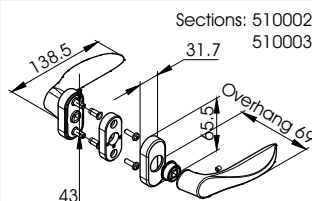


1862
FLOW paired lever handles
8 mm square spindle
Zamak, polyamide base

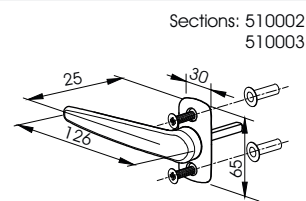


1870
HORUS extra-flat handle
8 mm square spindle
Zamak




1876
Rosace Opera

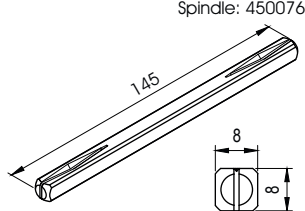

1879
8 mm square spindle
for paired lever handles
Galvanised steel

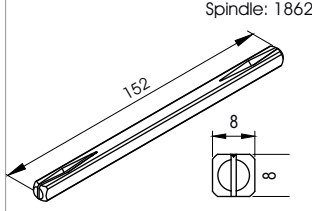

1889
8 mm square spindle
for paired lever handles
Galvanised steel

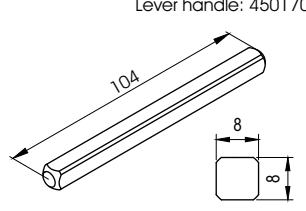


1894
Square spindle L=104mm
Galv. steel




5238
Clip-head screw
Stainless steel




5248
Tapered screw for
screw-fastened corner cleat
Stainless steel




5282
Assembly stiffener
Stainless steel




5615
Ø 12 mm hole cap
White or black polyamide



5616
Ø 10 mm hole cap
Grey, white or black polyamide




5617
Ø 14 mm hole cap
White or black polyamide

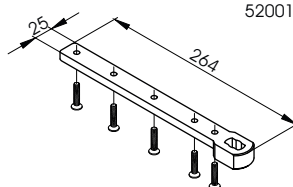

5670
Bras droit empreinte rectangulaire
Acier bi-chromaté

Three-axis adjustment
Maximum service load: 100 kg
Maximum leaf width: 1000 mm


















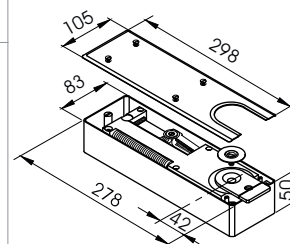


5661
Floor spring + cover plate
Plate: polished stainless steel

























5705/13
13.5 mm brush seal
25 m roll
Polypropylene


ACCESSORIES

Pivot: 5661  5665 Right-angled shaft Galvanised steel	Hinges: A5080 A5081 A5082  ball Ø 6 5702 Anti-break-in two-leaf hinge kit Stainless steel	Hinges: A5086 A5087  bille Ø 6 5703 Anti-break-in three-leaf hinge kit Stainless steel	Sections: 5437 510012 510013 520013  5705/16 16 mm brush seal 25 m roll Polypropylene
Profiles : 510012 510013  5721 Pivot haut Corps zamak, platine inox	Sections: 510002 510003  5765 Safety escutcheon Aluminium	Sections: 510002 510003  5786 Half cylinder, DIN cam, variant keys Nickel-plated steel 5787 Ditto, common key	Section: 510013  5974 10 mm top strike plate Black HDPE
Fixed frames / opening frames / mullions  8629 4 mm snap-in gaskets Black or grey TPE	Ø 10 Ø 14  9549 Ø10 mm hole cap White or black polyamide	Section: 520003  9670 Groove cap strip EPDM	
Sections: 420082 420084  9705 Bottom weather seal under track Polyethylene foam	Hinge: A5084  55092 Backplate insertion tool PVC + bichromated steel	Fixed frames / opening frames / mullions  440001 Clip-on external gasket Black or grey MDPE	Fixed frames / opening frames / mullions  440010 3 mm snap-in gasket Black or grey TPE
Fixed frames / opening frames / mullions  440012 5 mm snap-in gasket Black or grey TPE	Fixed frames / opening frames / mullions  440013 5 to 7 mm snap-in gasket Black or grey TPE	Section: 510002 510003  450074 ZED single lever handle 8 mm spindle drive Aluminium, polyamide base	Section: 510002 510003  450076 ZED paired lever handles 8 mm spindle drive Aluminium, polyamide base
Profiles : 510002 510003  450077 Rosace ZED Platine alu, sous-platine polyamide	Sections: 510002 510003  450170 INSTALLUX paired lever handles 8mm square spindle Zamak	Sections: 510002 510003  450171 INSTALLUX single lever handle 8mm square spindle Zamak	Sections: 510002 510003  450172 Square escutcheon Aluminium, polyamide base

ACCESSORIES


 Sections: 410004 410031 – 410037 410074 510002 510003 510004 510005 510008 510010 510012 460000 Alignment bracket Stainless steel	 Sections: 410030 to 410036 460001 Alignment joint kit Aluminium	 Cleat: 460034 Blocks: 460012 560022 460002 M5 screw for cleats and blocks Aluminium	 Sections: 410033 410034 460008 Assembly block for 60.9 x 20.2 mm chamber Aluminium Screw 460002 ordered separately
 Sections: 410031 410032 410036 510008 460012 Assembly block for 15.4 x 20.4 mm chamber Aluminium Screw 460002 ordered separately	 Sections: 510002 510003 460013 Variable angle cleat for 20.2 x 41.8 mm chamber Mill finish aluminium Screw 5248 ordered separately	 Sections: 510000 510001 510004 510005 460014 Variable angle cleat for 20.2 x 27.1 mm chamber Mill finish aluminium Screw 5248 ordered separately	 Sections: 510004 510005 460015 Variable angle cleat for 20.2 x 27.1 mm chamber Mill finish aluminium Screw 5248 ordered separately
 Sections: 420033 to 420038 460019 Clip Stainless steel	 Sections: 410004 510000 510001 510004 510005 510010 510013 510014 510015 460034 Crimp- or screw-fastened cleat* for 27.1 x 20.2 mm chamber Aluminium Screw 460002 ordered separately	 Section: 420023 460046 Flank kit for 100 mm weather bar (left and right-hand parts) Noryl	 Section: 420024 460047 Flank kit for 120 mm weather bar (left and right-hand parts) Noryl
 Section: 420025 460048 Flank kit for 140 mm weather bar (left and right-hand parts) Noryl	 Section: 420026 460049 Flank kit for 160 mm weather bar (left and right-hand parts) Noryl	 Sections: 510000 510004 460061 European chamber weatherproofing Silicone	 Sections: 510000 510004 Shutter piece: 420011 460091 120 mm double end piece (left and right-hand parts) Polyamide
 Sections: 510000 510004 Shutter piece: 420012 460092 140 mm double end piece (left and right-hand parts) Polyamide	 Sections: 510000 510004 Shutter piece: 420013 460093 160 mm double end piece (left and right-hand parts) Polyamide	 Sections: 510000 510004 Shutter piece: 420010 460094 100 mm double end piece (left and right-hand parts) Polyamide	 Sections: 420012 420013 420014 420059 460098 Shutter piece end kit for 140 to 200 mm insulation Polyamide
 460110 Deflector with flap Polyamide, grey, white or black	 460111 Plain deflector Polyamide, grey, white or black	 Sections: 510000 to 510003 510006 510007 540000N Weather seal Black MDPE	 Sections: 510000 to 510003 510006 510007 540001 Finishing trim Grey, white or black PVC

ACCESSORIES




540008

COMETE 70TH XPE foam
XPE




540010

Finishing trim for nip-guard door
Black MDPE




550001

Recessed door closer
Steel / Aluminium
Compliant with accessibility standard




550002

Slideway for recessed door closer
DIN L
Aluminium




550003

Slideway for recessed door closer
(DIN R)
Aluminium




550006

Slideway for face-mounted
door closer
Steel / aluminium




550007

Auto-retract kick plate, len. 1000 mm
Aluminium body,
steel spring, EPDM seal




550008

Auto-retract kick plate, len. 1100 mm
Aluminium body,
steel spring, EPDM seal




550009

Auto-retract kick plate, len. 1200 mm
Aluminium body,
steel spring, EPDM seal




550010

45 + 45 cylinder + variant keys
DIN cam
Nickel-plated steel




550011

45 + 45 cylinder, common key
DIN cam
Acier nickelé




550012

45 + 45 cylinder, variant keys,
with thumbturn, DIN cam
Nickel-plated steel




550013

45 + 45 cylinder, common key,
with thumbturn, DIN cam
Nickel-plated steel




550014

Recessed door closer + slideway
Steel




550015

45 + 10 half-cylinder,
variant keys, DIN cam
Nickel-plated steel




550016

45 + 10 half-cylinder,
common key, DIN cam
Nickel-plated steel

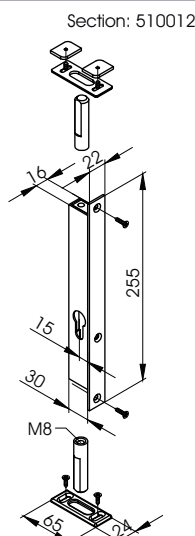


550018

Two-point lock with 16 mm case
Bichromated steel case,
stainless steel forend




550034

Semi-fixed drawbolt, surface-mounting
Aluminium body, stainless steel bar




550035

Top strike plate
Aluminium




550036

Bottom strike plate
Semi-fixed drawbolt, surface-mounting
Brass




550037R

Set of semi-fixed lock bolts +
adjustable strike plates
Galvanised steel + stainless steel +
powder-coated steel 9006



550040N


Adjustable centre strike plate
Zamak + stainless steel



550042


Anti-unhinging system
Stainless steel

ACCESSORIES




550049

Bottom strike plate
Semi-fixed drawbolt
Brass




550051

Plug for electric strike
Santoprene




550052

Push-pad case
Steel / zamak




550055

Electric strike plate
Stainless steel




550072

Guide cremone ouvrant anti pince
doigt à coupe d'onglet
Polyamide




550073

Locking bar guide for kick plate
Polyamide, stainless steel




550076

9 mm offset kit,
ref. 576201 and 576202
Aluminium, polyamide




550077

Crapaudine
Acier




550080N

Kit of top and bottom
adjustable strike plates
Zamak + stainless steel




550082

Floor pivot plate assembly
Stainless steel




550084

APD DA cantilever arm with sill
Stainless steel




550086

Bush for sill
Nylon




550093

Door closer kit




550101

Panic bar kit
Steel / Zamak




550103

Floor strike plate kit
Aluminium




550105

Strike plate kit with shims
Steel - Zamak / Shims: PA6.6




550108

Lever handle for
panic release
Galvanized steel / Zamak




551801

Door closer, force 1 to 4
(with slide arm)
Powder-coated aluminium

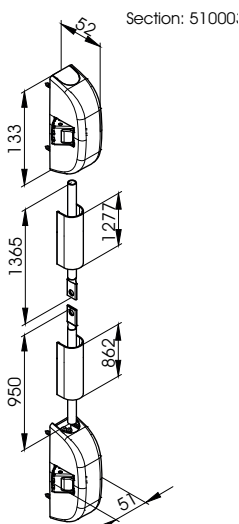

550104


Side-mounted panic bolt kit
Steel / Zamak



560000


Opening frame corner cleat
41.8 x 19.6 mm moulding*
Aluminium

*Screw 460002 to be ordered separately




560001

Glazing packer support
Polyamide



560002

























Weather bar end piece kit
(left-hand and right-hand parts)
Black or white polyamide






















560003

Kit embout de seuil
(pièces gauche et droite)
Polyamide noir ou blanc


















ACCESSORIES

 Sections: 510002 510003 560004 Secondary leaf end piece kit (left-hand and right-hand parts) Black or white polyamide	Profiles: 510002 510003  560005 Weatherproofing end piece for right-hand opening Santoprene	Profiles: 510002 510003  560006 Weatherproofing end piece for left-hand opening Santoprene	 Section: 520005 560007 Kick plate weather bar end piece kit (left-hand and right-hand parts) Polyamide
 Section: 520003 560008 Mullion end-piece kit for electromagnetic catch (top and bottom parts) Santoprene	Profiles: 510012 520010  560009 Bouchon montant ouvrant rond anti pince doigt Polyamide	Sections: 510002 510003  560011 Slot-and-clamp hinge Aluminium	Section: 520004  560014 Assembly block for fixed frame with electromagnetic catch Aluminium
Section: 520003  560015 Assembly block for leaf with electromagnetic catch Aluminium	 560016 Embout profil réhausseur 510025 Polyamide	Sections: 510002 510003  560017 Push handle Aluminium	Sections: 510002 510003  560018 Strip handle Aluminium
Sections: 510002 510003  560019 Push handle spacer Aluminium	Sections: 510002 510003  560020 Installation accessory Aluminium, nuts galvanised steel stud bar	Sections: 510002 510003  560023 Opening frame corner cleat, 41.8 x 19.6 mm* Aluminium *Screw 5248 to be ordered separately	Sections: 510002 510003  560024 Single SELENE handle Aluminium / stainless steel
Profil : 520013  560025 Bouchon raccord angle Santoprene	Sections: 510002 510003  560026 Paired SELENE handles Aluminium / stainless steel	Profiles: 510002 510003 510012  560027 Butoir de porte Elastomère blanc	Sections: 510002 510003  560028 Opening frame corner cleat, 41.8 x 19.6 mm* for recessed door closer Aluminium *Screw 5248 to be ordered separately
Profil : 520004  560031 Kit bouchon SF ventouse Polyamide noir	Sections: 510002 510003  560032 Three-part slot-and-clamp hinge Aluminium	Profil : 510012  560034 Kit de fixation pivot linéaire 5721 et ferme-porte 550014 Inox	Profiles: 510012 520013  560035 Kit de fixation bras droit 5670 Inox


ACCESSORIES

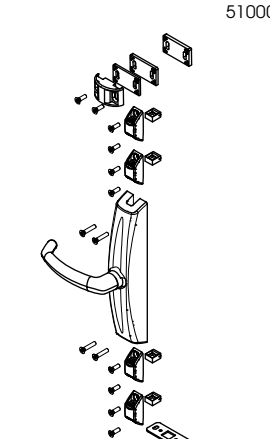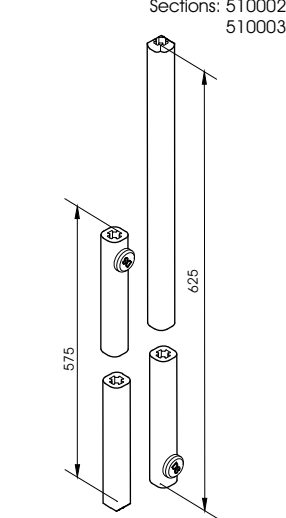 Sections: 510012 520013 560036 Fastening kit for cantilever arm 5670 Stainless steel	 Sections: 510000 - 510003 510006 510007 513006 513007 560037 Alignment bracket Stainless steel	 Section: 510015 560039 Plate+backplate+ screw assembly Stainless steel	 Section: 510013 560040 Sill weatherproofing end piece for pivot plate side Polyamide
 Section: 510013 560041 Sill weatherproofing end piece for lock side Polyamide	 Section: 510034 560044 Sill end cap kit (R+L) Polyamide white or black	 Hinges: 560010 to 560013 570003 Adjustment tool Slot-and-clamp hinge Aluminium	 Sections: 510002, 510003 570030 Marking-out template for side-mounted kit Aluminium
 Section: 510002, 510003 570031 Marking-out template for vertical kit Aluminium	 Section: 510002 570032 Marking-out template for vertical kit with kick plate Aluminium	 Sections: 510002, 510003 570033 Marking-out template for side-mounted kit with kick plate Aluminium	 Sections: 510002 510003 576201 Surface-mounted espagnolette lock with reversible turning handle Zamak body
 Sections: 510002 510003 576202 Surface-mounted espagnolette rod with reversible turning handle Aluminium stem	 Section: 420010 664000 Fastening lug for 100 mm shutter piece Galvanised steel	 Section: 420011 664001 Fastening lug for 120 mm shutter piece Galvanised steel	 Fastening lugs: 664000 to 664003 664004 Thermal break spacer Length 40 mm PVC
 Fastening lugs: 664007 664008 664005 Thermal break spacer Length 90 mm PVC	 Fastening lugs: 664000 to 664003 664006 Clamp plate, 10 x 14 mm Galvanised steel	 Section: 420014 664011 Fastening lug for 200 mm shutter piece Galvanised steel	 664012 Bracket for timber frame, 35/50 mm Galvanised steel

ACCESSORIES

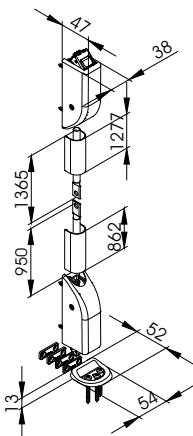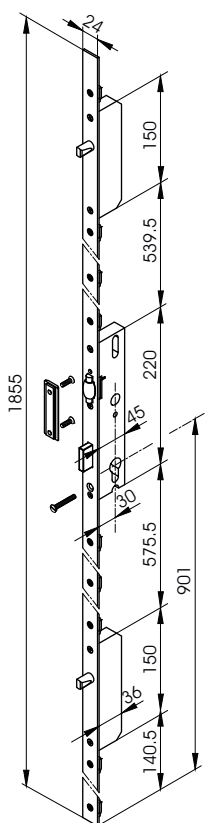
 664013 Bracket 150 mm 13/50 mm Galvanised steel	 664014 Bracket 150 mm 22/50 mm Galvanised steel	 664016 Retrofit (total dismantle) bracket Galvanised steel	 664017 Extender for retrofit (total dismantle) bracket Galvanised steel
 664018 External insulation attachment lug Galvanised steel	 664021 Patte de fixation traverse basse Acier galvanisé	Sections: 510000 510004  664032 SPM3/15 screw Carbonitrided steel	Patte de fixation : 664016 Rallonge : 664017  664033 Cale patte rénovation dépose totale PVC
Pattes de fixation : 664007 664008 6691 à 6699  664034 Cale patte à gousset PVC	Section: 420059  664035 Fastening lug for 180 mm shutter piece Galvanised steel	Profil : 520012  940025 Brosse d'étanchéité à lame centrale hauteur 8.5 mm 940025/2 idem, longueur 25 m Polypropylène	Sections: 510002 510003  55010301 Vertical panic bolt kit Steel/Zamak
Sections: 510002 510003  A5025 Three-point lock with deadbolt, half keyturn Stainless steel forend	 A5027 Serrure 3 points à rouleau Têtière inox	Sections: 510002 510003  A5023 Deadbolt lock Half keyturn Stainless steel forend	Sections: 510000 to 510003 510006 510007  A5039 Rabbit contactor for electric strike on secondary leaf PVC, aluminium plate
		Sections: 510000 510001 510006 to 510008  A5051 40 mm brush seal for strike plate EPDM + Polypropylene	Sections: 510000 510001 510006 to 510008  A5052 45 mm brush seal for strike plate EPDM + Polypropylene

ACCESSORIES

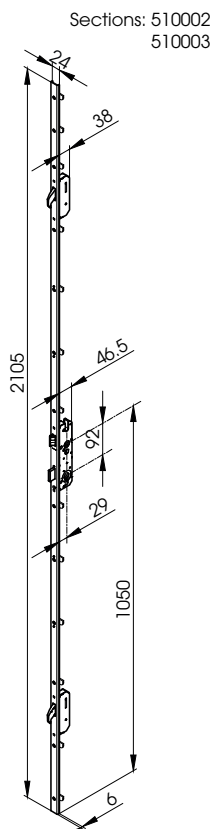


A5061N

Lock with three-point hook latch
Powder-coated steel forend,
galvanised steel cases

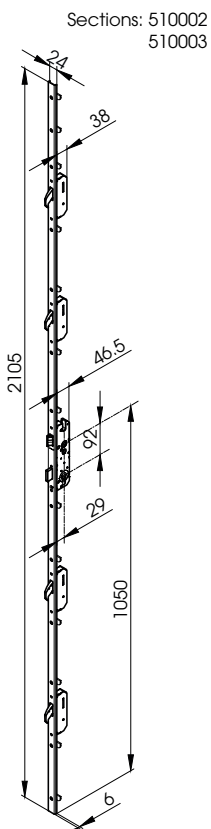


A5062N

Lock with five-point hook latch
Powder-coated steel forend,
galvanised steel cases

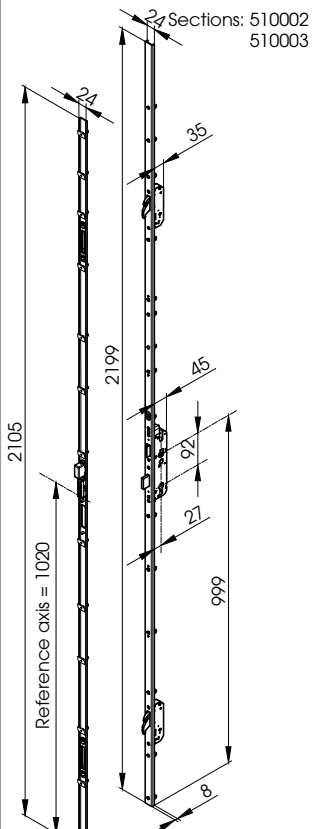


A5063N

Three-point automatic lock
+ continuous strike plate, right
Powder-coated steel forend,
galvanised steel cases

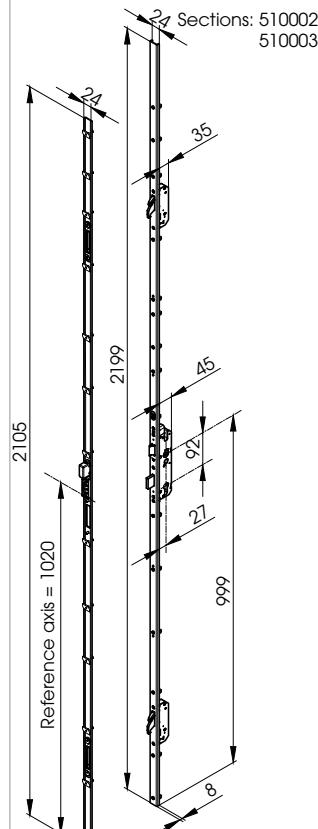


A5065N

Three-point automatic lock
+ continuous strike plate, left
Powder-coated steel forend,
galvanised steel cases

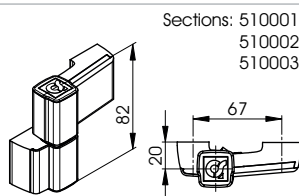


A5080

Two-part hinge
Centre spacing 67/20 mm
Aluminium

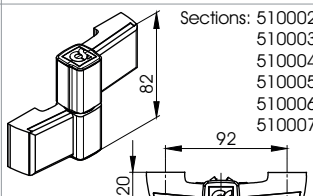


A5081

Two-part hinge
Centre spacing 92/20 mm
Aluminium

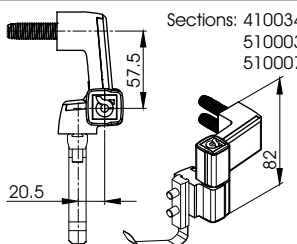


A5084
Corner hinge
Aluminium




A5085

Backplate + screws set
Polyamide

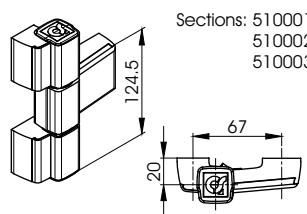


A5086

Three-part hinge
Centre spacing 67/20 mm
Aluminium

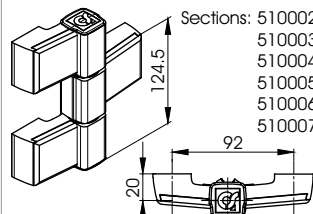


A5087

Three-part hinge
Centre spacing 92/20 mm
Aluminium

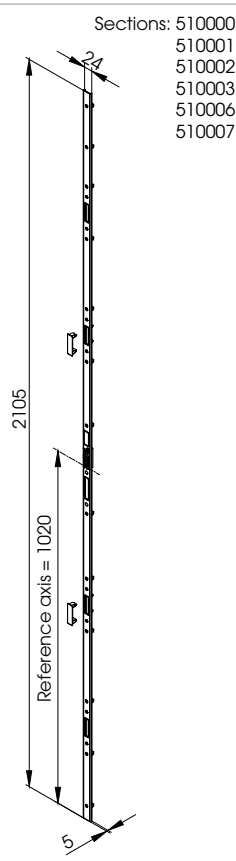

A5088

Three and five-point
continuous strike plate, right
Powder-coated steel forend

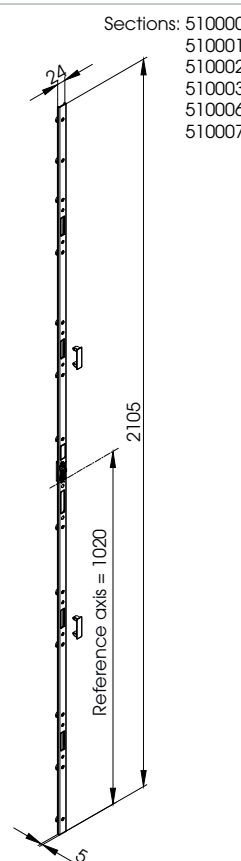

A5089

Three and five-point
continuous strike plate, left
Powder-coated steel forend

ACCESSORIES

