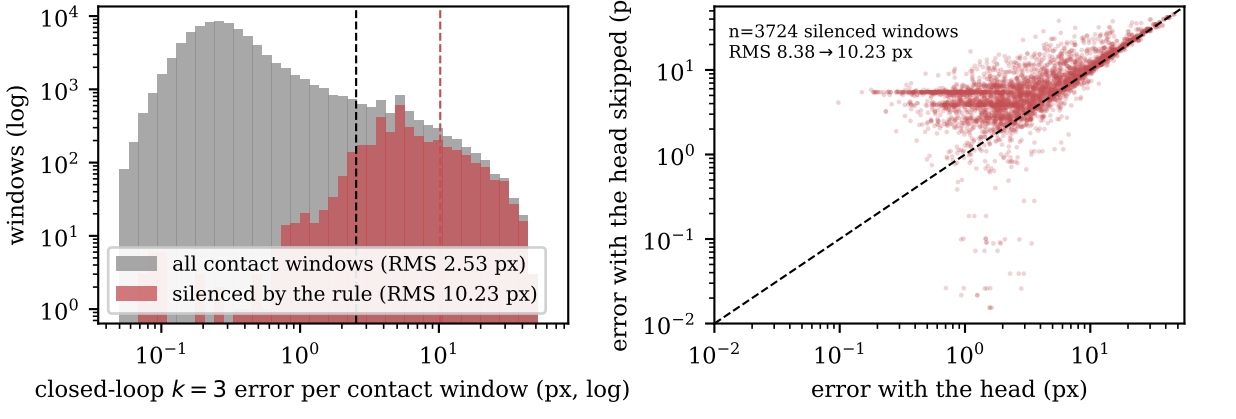

(a) the silenced windows are not typical
windows (log)
10^4
10^3
10^2
10^1
10^0
all contact windows (RMS 2.53 px)
silenced by the rule (RMS 10.23 px)
10^{-1}
10^0
10^1
closed-loop $k = 3$ error per contact window (px, log)
(b) what skipping the head costs, per window
n=3724 silenced windows
RMS 8.38 → 10.23 px
error with the head skipped (px)
10^1
10^0
10^{-1}
10^{-2}
10^{-2}
10^{-1}
10^0
10^1
error with the head (px)