
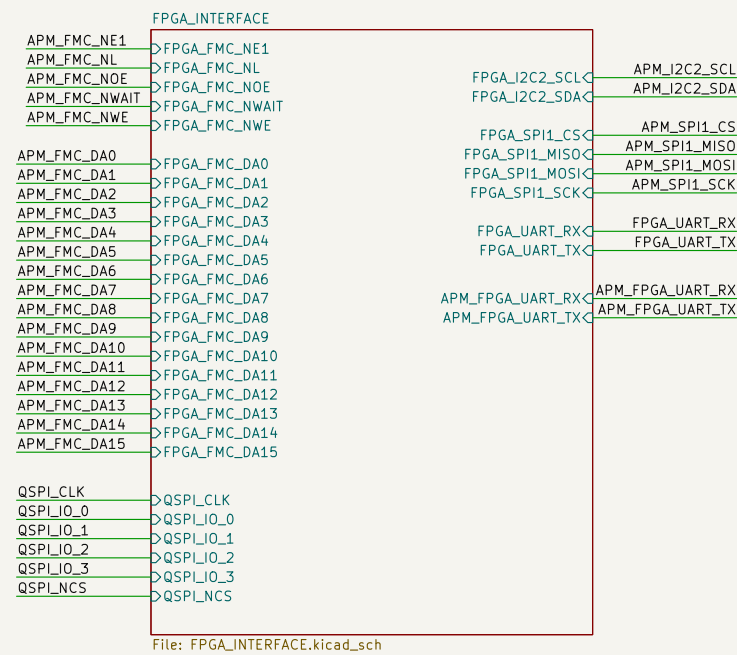

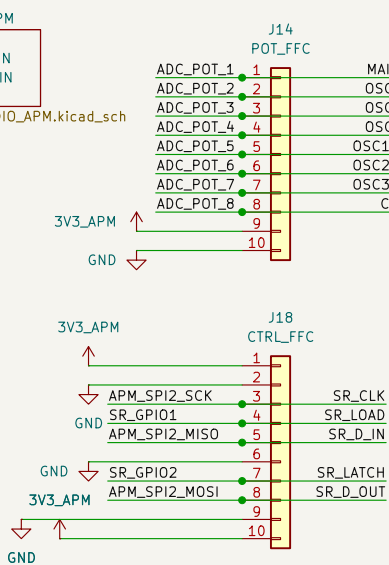


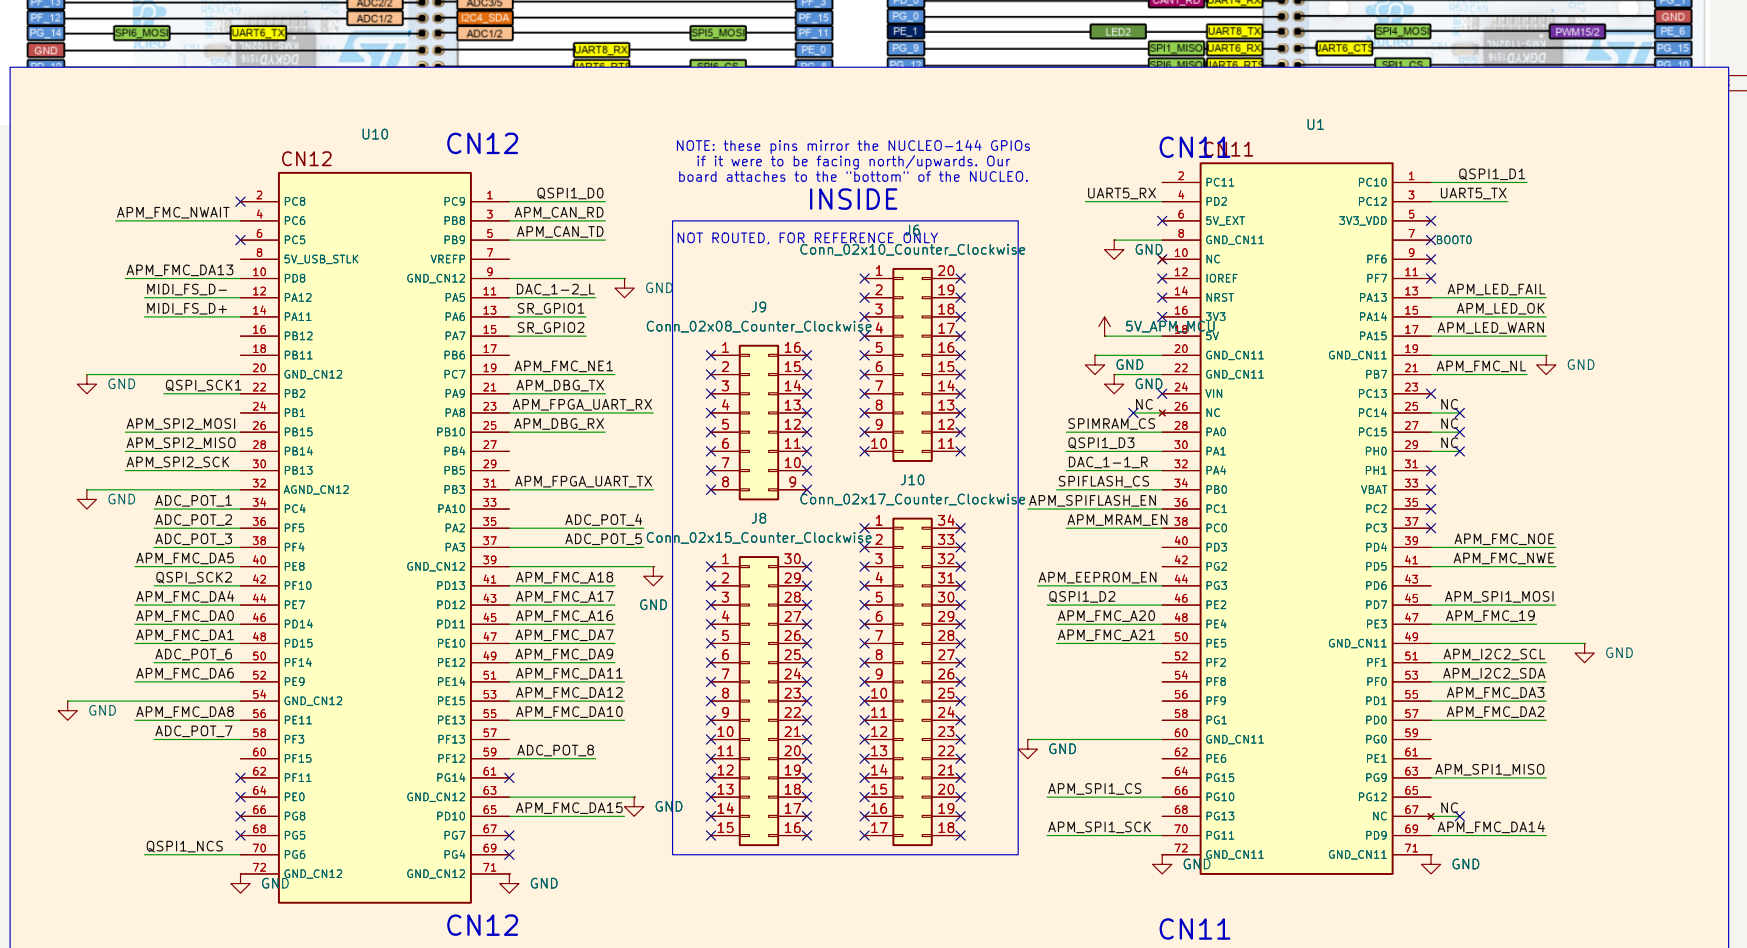



## STM32H755 NUCLEO

### Audio Peripheral Module

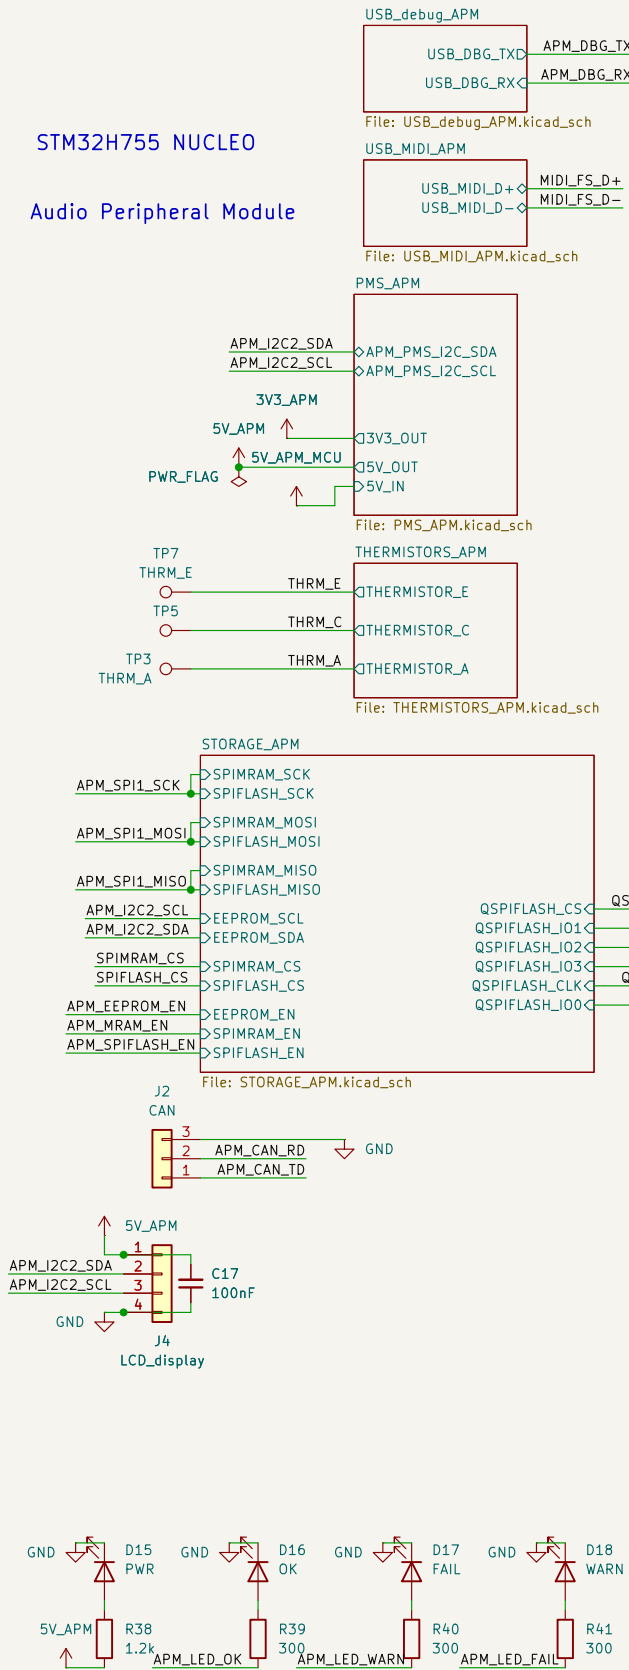

# UART -> USB Debug Port

UART debug messages available via a USB port and a 3 pin jumper for TX, RX, and GND UART connections

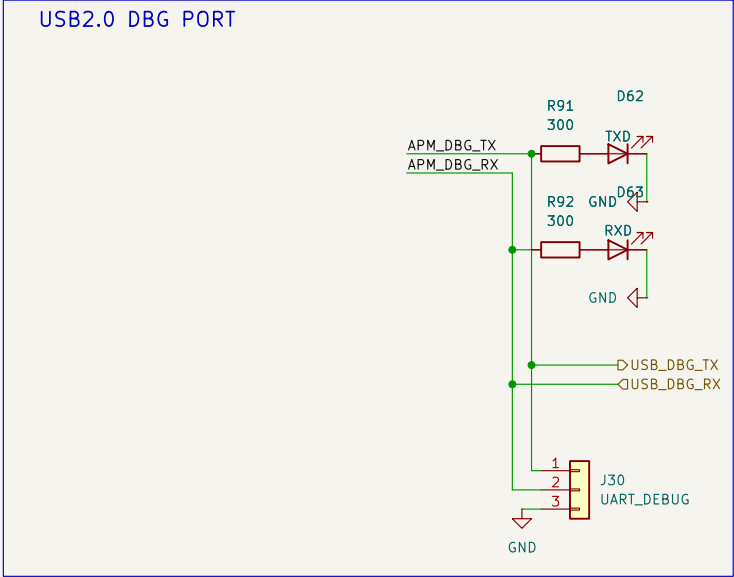

Sheet: /USB\_debug\_APM/  
File: USB\_debug\_APM.kicad\_sch

**Title:**


Size: A4

Date:

KiCad E.D.A. 10.0.4




**Rev:**

Id: 2/8

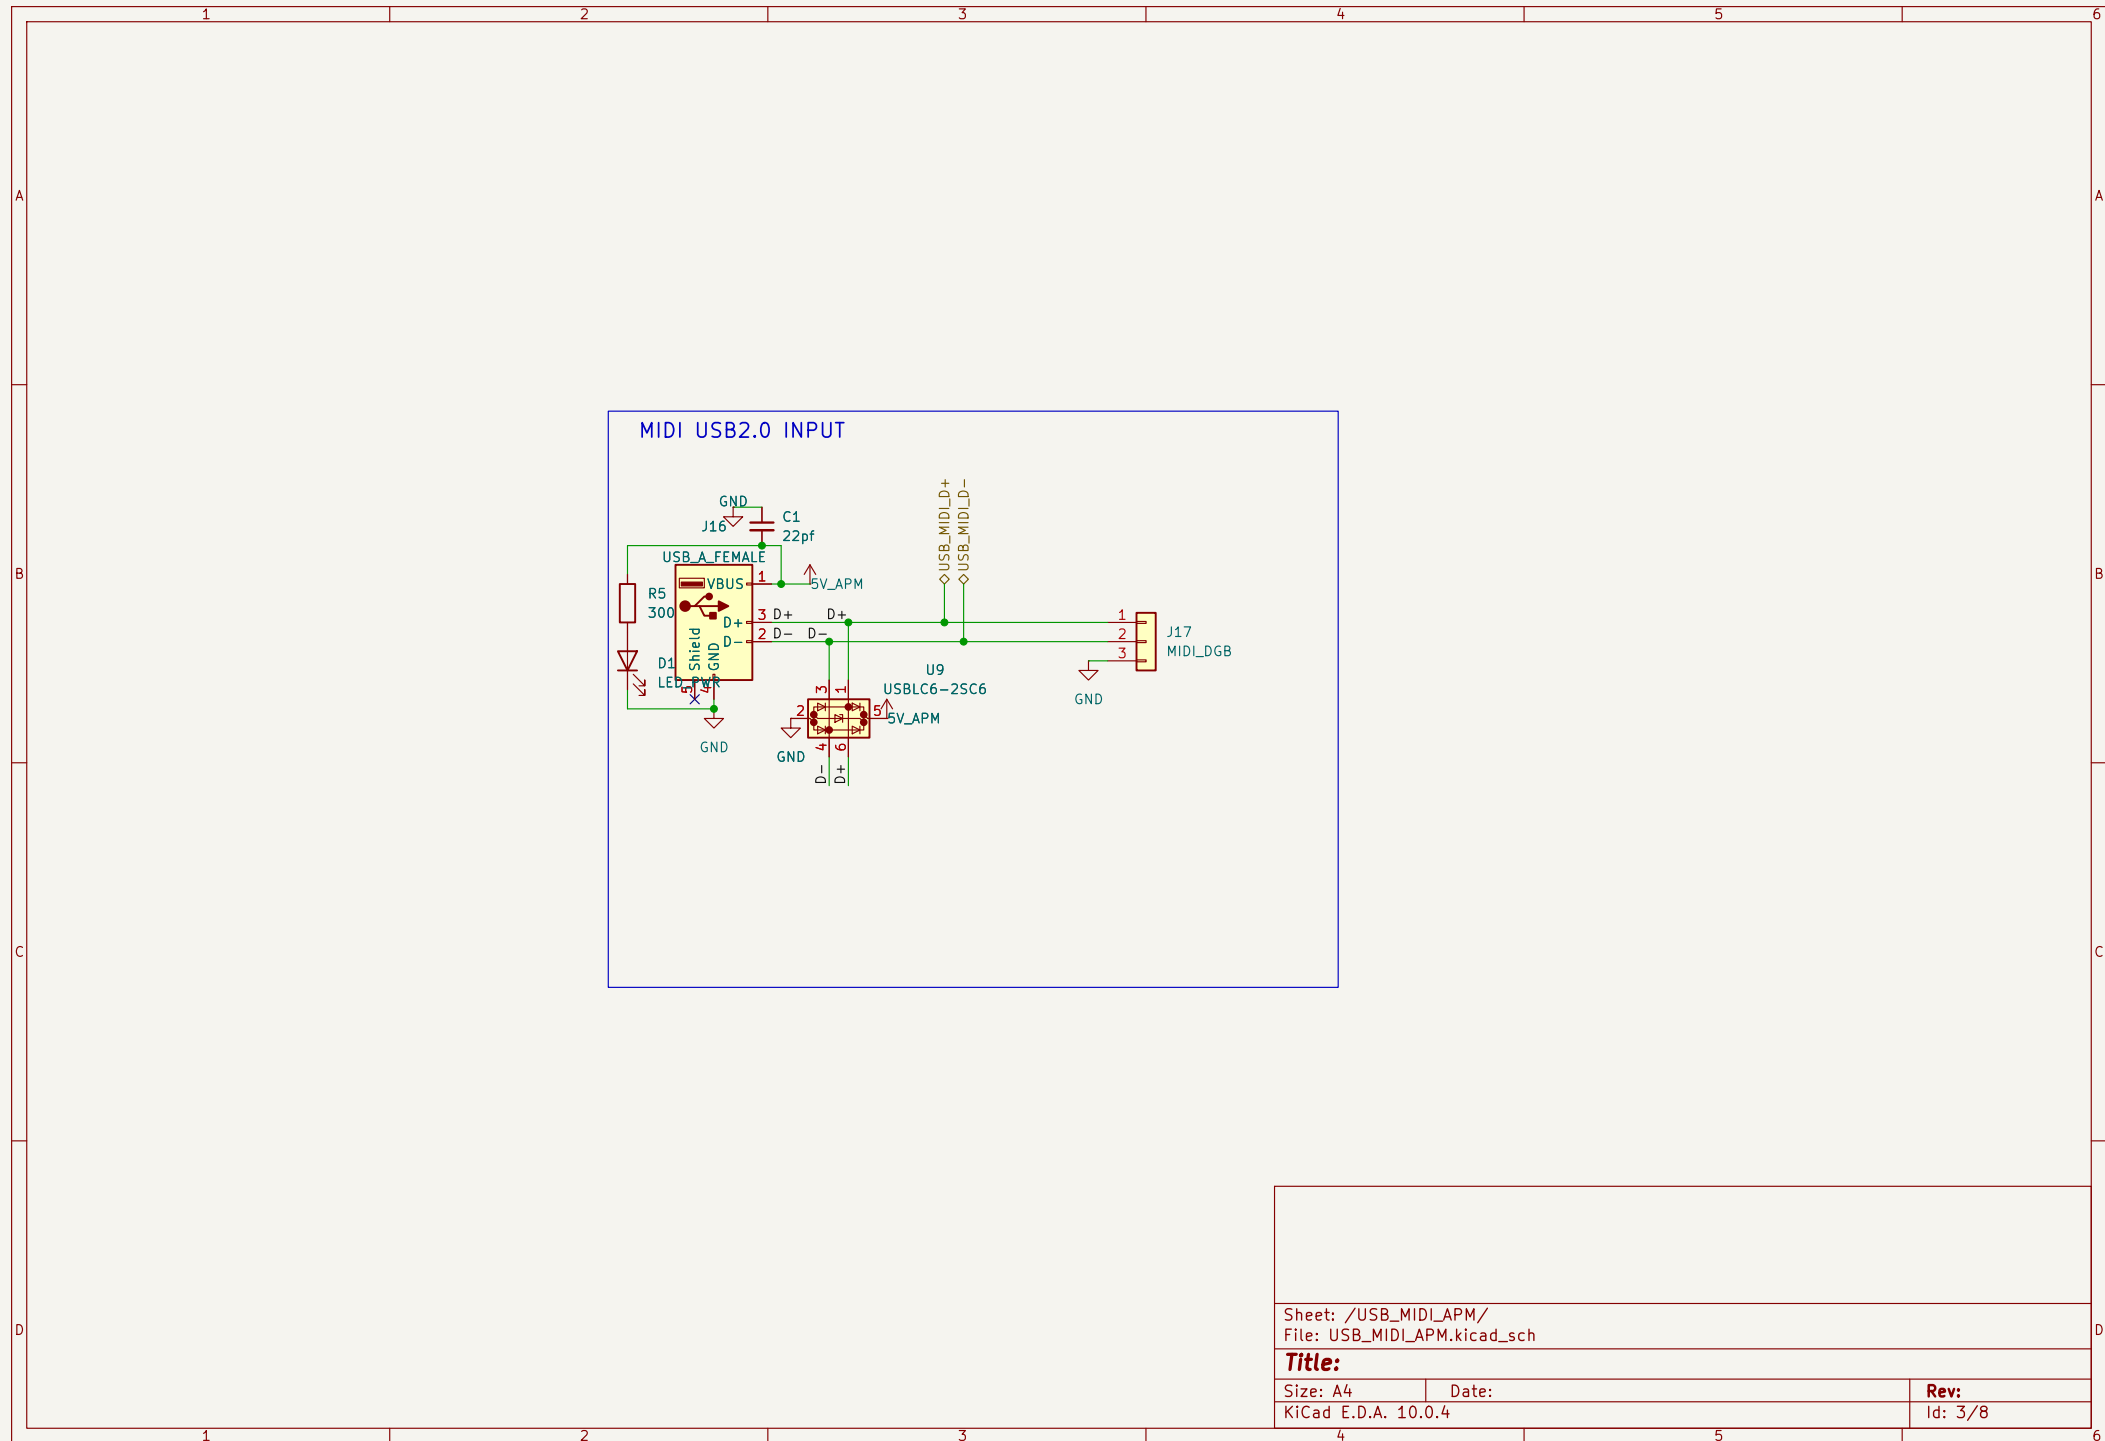

# Power Monitor and Supply

PMS has an INA219 current sensor  
for each board/node in the  
PCB. Each takes in the 5V from it's  
parent board and supplies 5V to said  
board's circuit (its peripherals)  
thus enabling monitoring

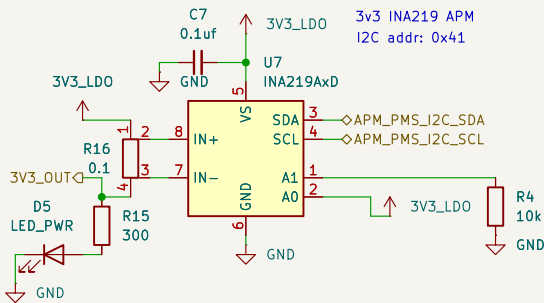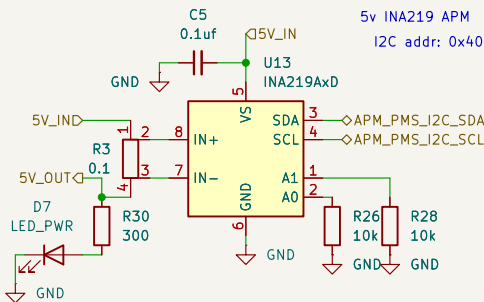

Sheet: /PMS\_APM/  
File: PMS\_APM.kicad\_sch

Title:


Size: A4


Date:

Rev:

KiCad E.D.A. 10.0.4

Id: 4/8

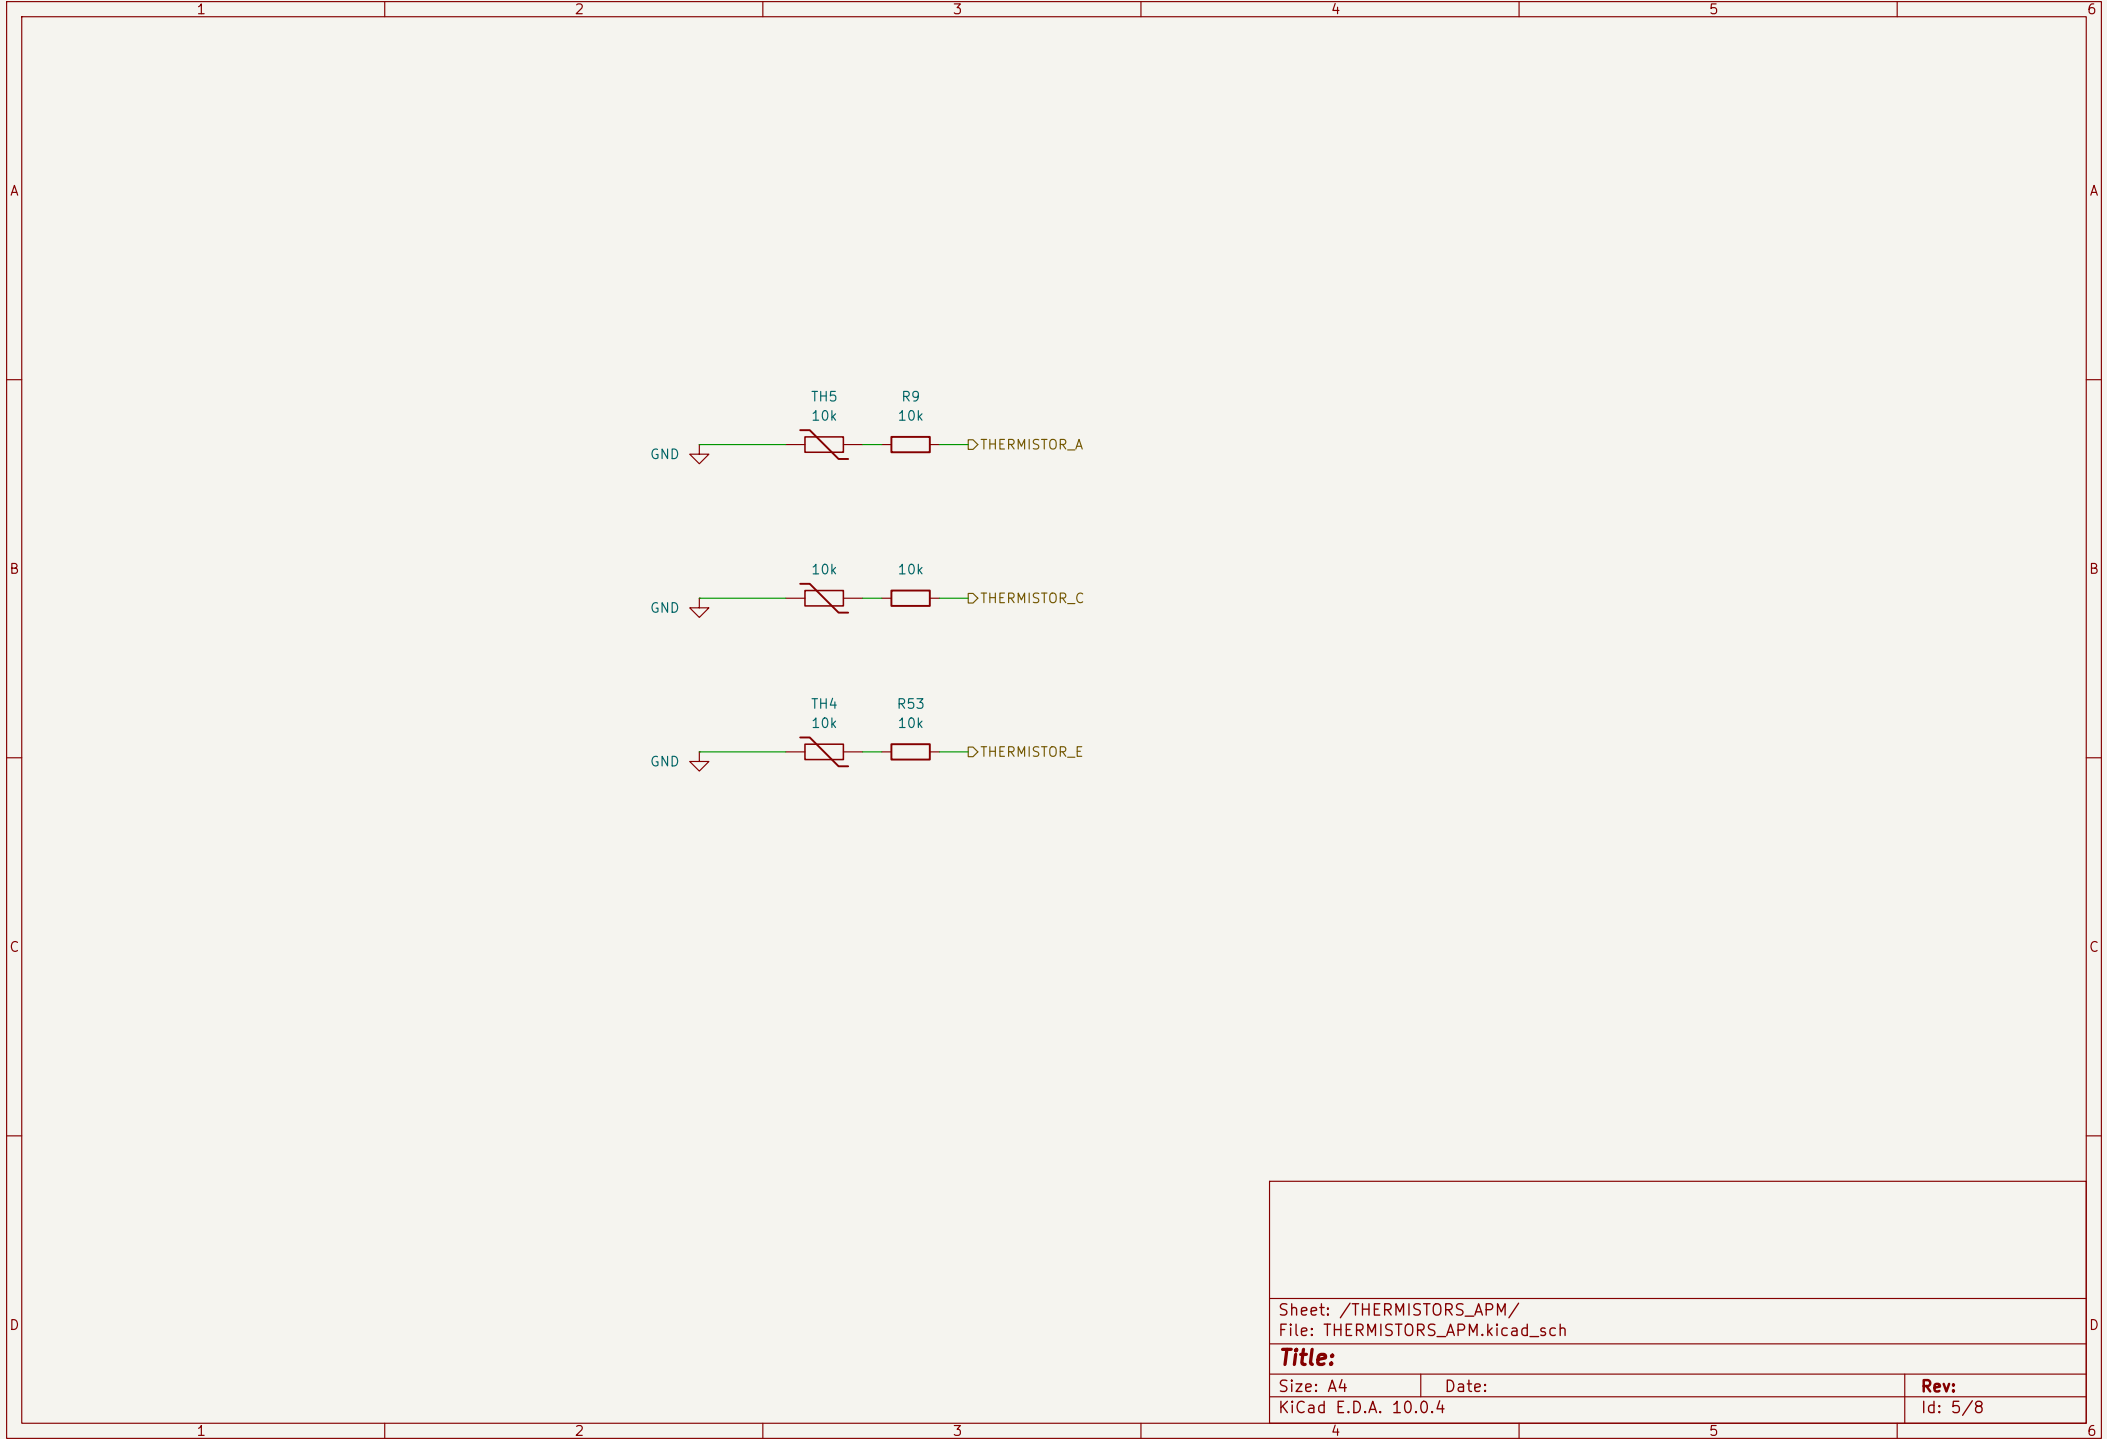

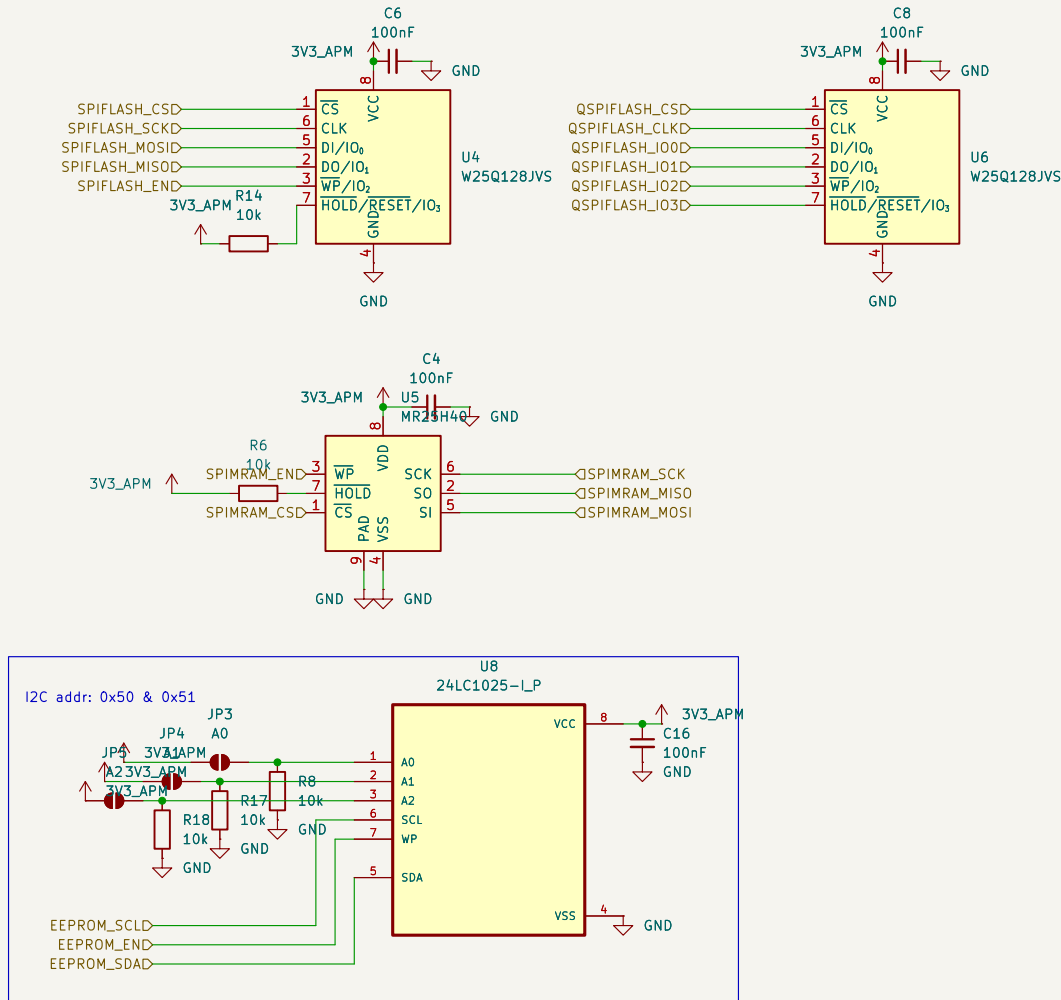

Sheet: /STORAGE\_APM/  
File: STORAGE\_APM.kicad\_sch

# **Title:**



Size: A4

Date:

KiCad E.D.A. 10.0.4

**Rev:**

Id: 6/8

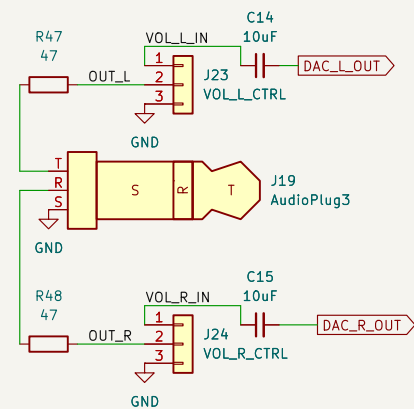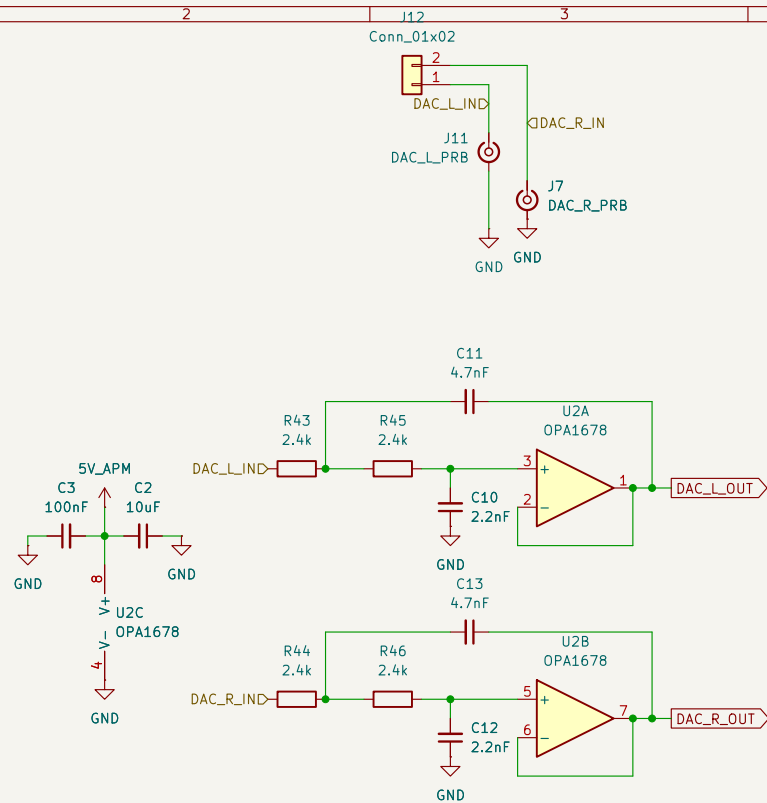

Sheet: /AUDIO\_APM/  
File: AUDIO\_APM.kicad\_sch

**Title:**




Size: A4  
KiCad E.D.A. 10.0.4

Date:

**Rev:**  
Id: 7/8

Dual FPC STM32<-->Tang Nano 20K FPGA connection configuration. The STM32 side has two connectors where only one can be active at a time

- Configuration 1: FPGA\_FFC with SPI, QSPI, UART connections.
- Configuration 2: FPGA\_FMC with 16 bit muxed FMC configuration resulting in a 128kb shared address space between the STM32 & FPGA

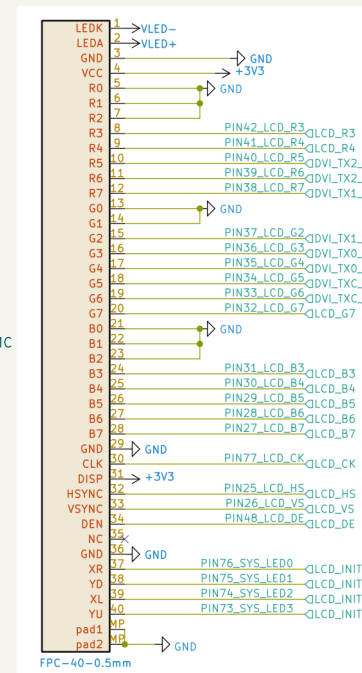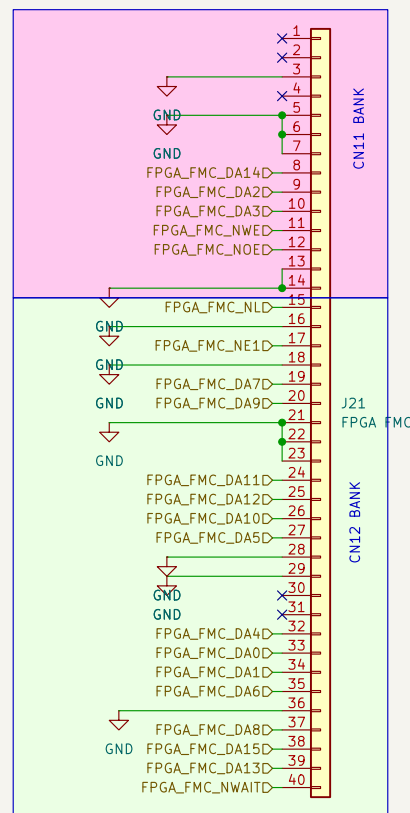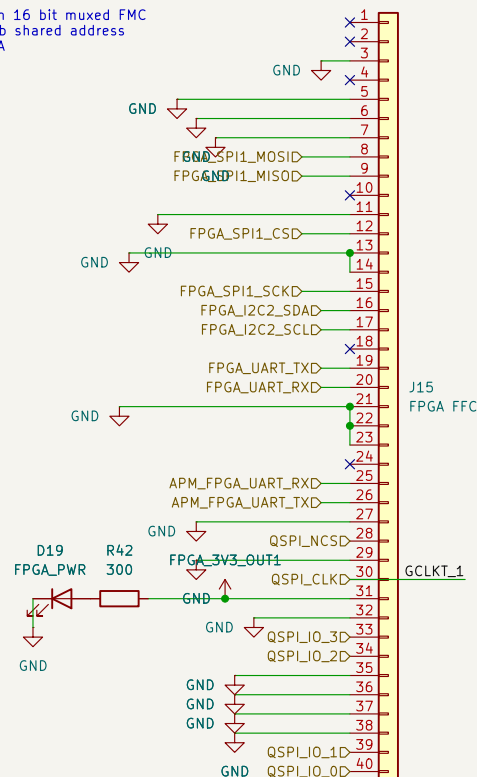

Sheet: /FPGA\_INTERFACE/  
File: FPGA\_INTERFACE.kicad\_sch

**Title:**

Size: A4  
KiCad E.D.A. 10.0.4

Date:

**Rev:**  
Id: 8/8