


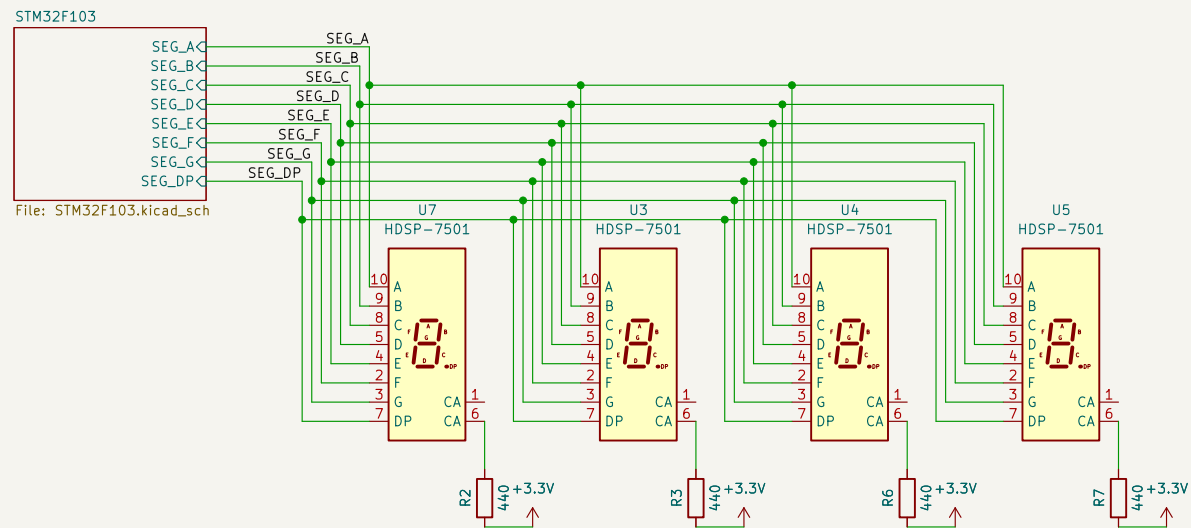

Sheet: /
File: 7SDD.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.3

Date:

Rev:
Id: 1/2

Power Supply & Led



- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

The schematic shows the electrical connections for the STM32F103C8T6 microcontroller. Key components include:

- Power Supply:** +3.3V and +3.3VA rails. VDDA filtering capacitors C11 (10n) and C12 (1u). A 100nF capacitor per pin for VBAT, VDD, and VDDA.
- Reset:** NRST pin connected to a reset network including R4 (10k), SW_BOOT0 switch, and SW_SPDT switch. BOOT0 pin connected to R4.
- Clock:** Y1 (16 MHz crystal) connected to PC13 and PC14. CL = 2*(CLO-CS) = 2*(10-5)pF = 10pF.
- GPIOs:** PA0-PA15, PB0-PB15, PC13-PC15, PD0-PD1, PE0-PE7, PF0-PF7, PG0-PG7, PH0-PH7, PI0-PI7, PJ0-PJ7, PK0-PK7, PL0-PL7, PM0-PM7, PN0-PN7, PO0-PO7, PP0-PP7, PQ0-PQ7, PR0-PR7, PS0-PS7, PT0-PT7, PU0-PU7, PV0-PV7, PW0-PW7, PX0-PX7, PY0-PY7, PZ0-PZ7.
- Serial Communication:** USART1_TX (PA9), USART1_RX (PA10).
- USB:** USB App Note AN4875. J3 connector for USB_B_Micro. USB_D+ (PB11), USB_D- (PB12), SWCLK (PB13), SWDI0 (PB14).
- Other:** LED1, LED2, LED3; SEG_AD, SEG_BD, SEG_CD, SEG_DD, SEG_ED, SEG_FD, SEG_GD, SEG_DP; Conn_01x04_Pin; J2; J4; STLINK.

SIZE: A1	DATE: 10/10/2023
KiCad E.D.A. 10.0.3	