


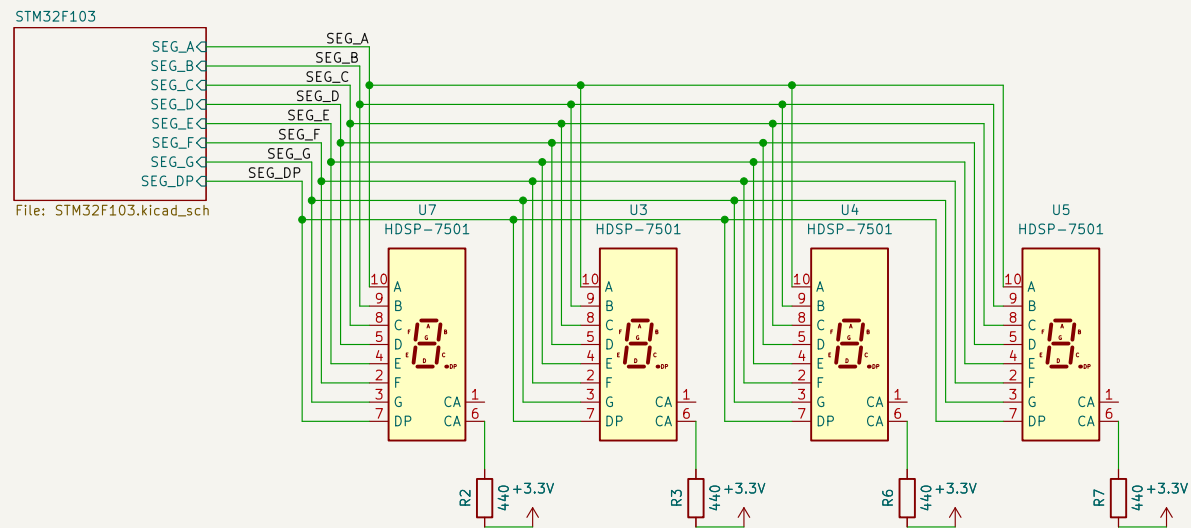

Sheet: /
File: 7SDD.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.3

Date:

Rev:
Id: 1/2

Power Supply & Led



- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

The schematic diagram illustrates the electrical connections for the STM32F103C8T6 microcontroller. The microcontroller (U2) is the central component, with its pins connected to various external components. Key connections include:

- Power Supply:** VDD, VDDA, and VBAT pins are connected to a +3.3V supply. VDDA is filtered with capacitors C11 (10nF) and C12 (1uF). A 100nF capacitor (C10) is connected to each pin.
- Reset:** The NRST pin is connected to a +3.3V supply through a 10uF capacitor (C5). The BOOT0 pin is connected to a +3.3V supply through a 10k resistor (R4).
- Crystal:** A 16MHz crystal (Y1) is connected to the SWCLK pin (PA14) and the SWCLK pin (PA15).
- USB:** A USB connector (J3) is connected to the VBUS, D+, D-, GND, and Shield pins. A USB_B_Micro connector (J4) is connected to the STLINK pins.
- Other Pins:** Various other pins are connected to ground or specific components, including LEDs (LED1, LED2, LED3), UART pins (USART1_TX, USART1_RX), and segment drivers (SEG_AD, SEG_BD, SEG_CD, SEG_DD, SEG_ED, SEG_FD, SEG_GD, SEG_DP).

Rev:
Id: 2/2