


DHCP-Relay Agent Project

-Akilan

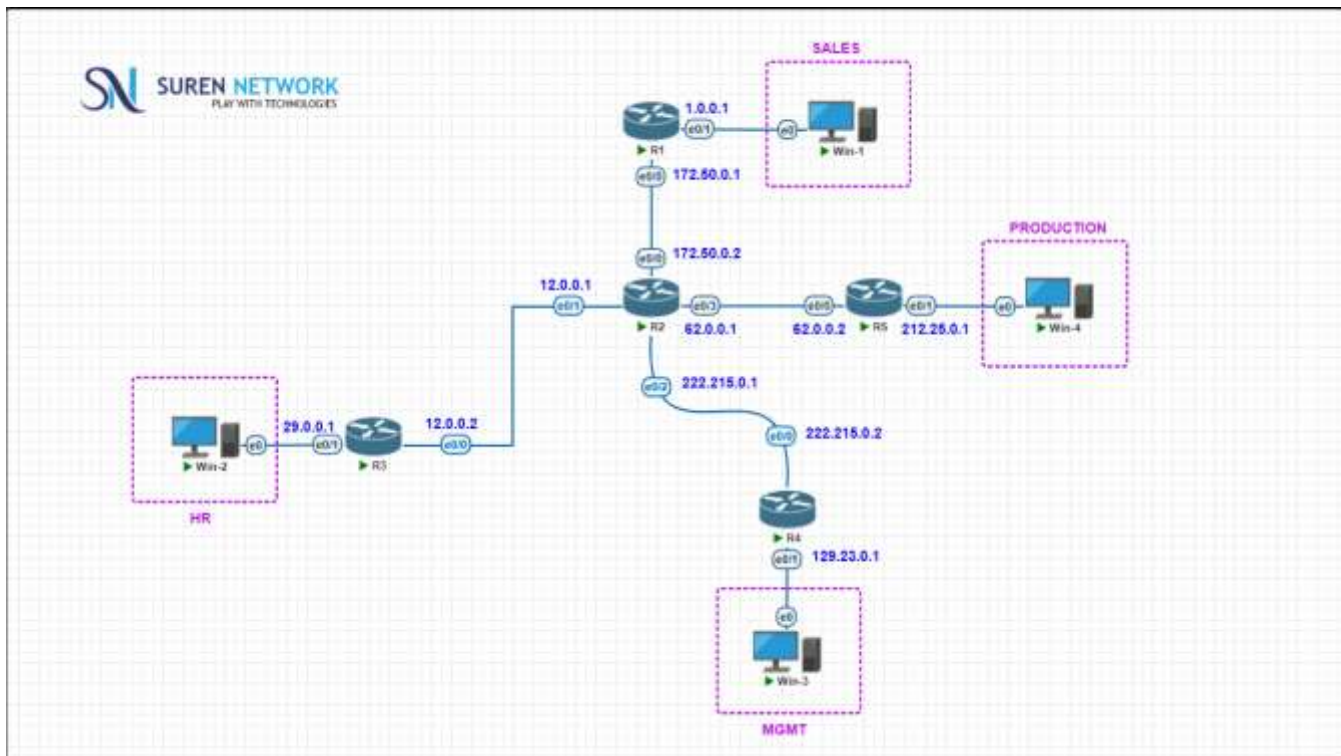

Step 1: Assign Ip to all **ROUTERS** and Enable **DHCP** in R2

```
R1#
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int eth 0/0
R1(config-if)#ip add 172.50.0.1 255.255.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#int eth 0/1
R1(config-if)#ip
*Aug 12 15:16:10.260: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config-if)#ip add 1.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#int eth 0/1
R1(config-if)#ip helper-address 172.50.0.2
R1(config-if)#
```

```
R2
R2(dhcp-config)#default-router 1.0.0.1
R2(dhcp-config)#dns-server 8.8.8.8
R2(dhcp-config)#lease 1 2
R2(dhcp-config)#exit
R2(config)#ip dhcp excluded-address 1.0.0.1 1.0.0.10
R2(config)#ip dhcp pool pro
R2(dhcp-config)#network 212.25.0.0 255.255.255.0
R2(dhcp-config)#default-router 212.25.0.1
R2(dhcp-config)#dns-server 8.8.8.8
R2(dhcp-config)#lease 1 2
R2(dhcp-config)#exit
R2(config)#ip dhcp excluded-address 212.25.0.1 212.25.0.10
R2(config)#ip dhcp pool mgmt
R2(dhcp-config)#network 129.23.0.0 255.255.0.0
R2(dhcp-config)#
^
% Invalid input detected at '^' marker.
R2(dhcp-config)#network 129.23.0.0 255.255.0.0
R2(dhcp-config)#default-router 129.23.0.1
R2(dhcp-config)#dns-server 8.8.8.8
R2(dhcp-config)#lease 1 2
R2(dhcp-config)#exit
R2(config)#ip dhcp excluded-address 129.23.0.1 129.23.0.10
R2(config)#
```

```
R3
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#exit
R3#
*Aug 12 15:12:25.943: %SYS-5-CONFIG_I: Configured from console by console
R3#sh ip int bri
Interface                                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0                             12.0.0.2        YES TFTP    up          up
Ethernet0/1                             29.0.0.1        YES TFTP    up          up
Ethernet0/2                             unassigned      YES TFTP    down        down
Ethernet0/3                             unassigned      YES TFTP    down        down
R3#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R3(config)#int eth 0/1
R3(config-if)#ip helper-address 12.0.0.1
R3(config-if)#
*Aug 12 15:14:22.568: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config-if)#
```

```
R4#
R4#
R4#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R4(config)#int eth 0/0
R4(config-if)#ip add 222.215.0.2 255.255.255.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#int eth 0/1
R4(config-if)#ip add 129.23.0.1 255.255.0.0
R4(config-if)#no sh
R4(config-if)#
*Aug 12 15:35:58.890: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4(config-if)#ip helper-address 222.215.0.1
R4(config-if)#
```

```
R5#
R5#
R5#
R5#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R5(config)#int eth 0/0
R5(config-if)#ip add 62.0.0.2 255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#int eth 0/1
R5(config-if)#ip add 212.25.0.1 255.255.255.0
R5(config-if)#no
% Incomplete command.

R5(config-if)#no no sh
      ^
% Invalid input detected at '^' marker.

R5(config-if)#no sh
R5(config-if)#ip helper-address 62.0.0.1
R5(config-if)#
*Aug 12 15:34:11.375: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R5(config-if)#
```

Step 2: Fetching IP from DHCP Using Relay agent and Default router

