Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 1/13

Design Review request form

Company:	STF Irrigation (ResDev Team)
Author:	Mr. Mehmet Günce Akkoyun

DISCLAIMER

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 2/13

Contents

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 3/13

1. SCOPE

Aim of this document is to collect basic information on the customer application that will help the Telit Design Review team in having a clear understanding of the application constraints and requirements of the whole application environment. This information together with the information provided for the Design Review (Schematic, PCB Gerber, PCB layup) will assist Telit Design Review team in providing customer with a tailored Design Review Report.

2. INSTRUCTIONS

Please fill this document in all the parts either checking the options or adding text description. For your convenience we repeat here the list of files required for a complete Design Review.

Please check the correctness of the documents before sending.

We need the following information:

1. Schematic files:

    1.1.   PDF with searchable names of components and signals.

    1.2.   Part name and description or BOM file.

2. CAD files:

    2.1.   Gerber files in format RS247X

    2.2.   Drill files in excellon format with preferred separate files for plated and non plated vias.

    2.3.   Netlist file in format IPC-356A.

    2.4.   PCB layout description with copper and dielectric width, dielectric constant.

    2.5.   PCB stack-up, description and gerber filename correspondences organized from top to bottom: layers, silkscreens, pastes and solder masks.

    2.6.   In alternative to gerbers files, the full single ODB++ zip file.

In order to speed up the Design Review for subsequent DR revisions:

The subsequent design review revisions requests must come with a change log description and Review ID.

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 4/13

3. CUSTOMER İNFORMATİON

Company name :	STF Irrigation
Country :	Turkey
Address :	4. O.S.B. Büyük Kayacık Mah. 103. Cad. No:12 Konya / Türkiye
Contact Name :	Mehmet Günce Akkoyun
Contact e-mail :	akkoyun@me.com

4. GENERAL İNFORMATİON

Application name :	P101DA : Weather Station
Telit module integrated in the application :	LE910S1-EAG - (External SIM)
Field of application :	Field climate measurement for agriculture
Installation description :	Module is installed in a weather station enclosure which placed on agriculture fields. Device works on open air conditions.
Other radio device integrated in the application :	Module includes only GSM and integrated GNSS (on module).
Other useful information :	Device is used with PCB antenna that sticks inside of enclosure. Device have multiple sensors (air temperature, air humidity, air pressure, rain sensor, soil temperature sensor etc). Device have 2 microcontroller; one is main microcontroller that measurements and IoT functions run. Second is FOTA microcontroller which is update the main microcontroller. GSM modem runs as null modem (we don't use microcontroller inside the modem). Device is powered via battery and solar cell. System is a sleeping device (controlled via TPL5111) but also wake up with external interrupts.
Design Review already done on this application	Yes
Previous Design Review ID	AE-34174
Non Disclosure Agreement Signed :	Yes

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 5/13

5. GENERAL VIEW

Scope of operation – main purpose of product

-	Asset Tracking
-	Automated Meter Reading / Management
-	Automotive - Car Makers & Tier1 Supplier
-	Fleet Management - Tolling - PAYD
-	GSM Gateway
-	GSM Railway
-	Industrial Automation
-	Information & Displays
-	Mobile Computing
-	Navigation
-	POS - Point Of Sales Terminals
-	Public Transportation
-	Security - Alarm - Surveillance
-	Sub-System & Terminals based on Telit modules
-	Telemedicine / Medical
X	Telemetry
-	Telephony
-	V24 to GPS converter
-	Vending
-	Wearable Electronics
-	Other :

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 6/13

6. LOCATION, AMBIENT, CONDITIONS

Location :	
-	Indoor
X	Outdoor
-	Automotive
X	Other : Placed on agriculture fields.

Ambient :	
X	Countryside
-	Urban

Conditions :	
-	Explosive Atmosphere
X	Extreme Conditions (specify) : Windy and rainy air conditions. High temperature and moisture conditions. Enclosure is designed for IP65 conditions.

Installations :	
X	Fixed
-	Mobile
-	Portable

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 7/13

7. BANDS OF OPERATION

Required Bands :	
-	CDMA 450
-	CDMA 800
-	CDMA 1900
-	GSM 850/1900
X	GSM 900/1800
-	UMTS B1
-	UMTS B2
-	UMTS B3
-	UMTS B4
-	UMTS B5
-	UMTS B8
-	LTE I (2100)
-	LTE II (1900)
X	LTE III (1800)
-	LTE IV (1700-2100)
-	LTE V (850)
-	LTE VII (2600)
-	LTE XIII (700)
-	LTE XX (800)
X	Others : All operators in Turkey and all 2G/4G compatible countries.

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 8/13

8. APPROVALS REQUIRED

Regulatory Approvals :	
X	CE Mark
X	GCF
X	FCC/IC
X	PTCRB
-	Other : _____

Carrier Approvals :	
-	AT&T
-	Verizon
-	Vodafone
X	Other : Turkcell in Turkey (all operators in Turkey)

Other Approvals :	
-	ATEX/IECEx (specify) : _____
-	Other : _____

9. ADDITIONAL RADIOS

Additional Radio Technology :	
-	WiFi
X	GPS (LE910S1-EAG on Module)
-	Bluetooth / BLE
-	Short Range (specify) _____

Coexistence Management :	
-	None
-	No Simultaneous Operation
-	Other : _____

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 9/13

10.GNSS

X	GPS
X	GLONASS
-	Galileo
-	QZSS
-	Beidou
-	Other : _____

11.ANTENNAS

-	Embedded
X	Internal : PCB antenna which sticked in the enclosure.
-	External, Placed directly on connector or close to application
-	External, Connected with long coax cable and placed away
-	GNSS antenna passive
X	GNSS antenna active

12.POWER

Type of power supply / battery (specify)	Li-Ion (3v8 - 4v2) 2000 mAh (planned 2x)
Modem RTC hold time requirement (specify)	We use onboard RTC ic for system wakeup and time stamp. So we don't plan to use modem RTC (there is no RTC backup need for modem)

13.SIM

X	Standard SIM Holder
-	Standard SIM Holder / SIM on Chip Mount Alternative
-	SIM on Chip Only
-	Dual SIM
-	Telit IoT Connectivity
-	SimWise (SIM profile embedded in Module)

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 10/13

14. MODULE CONTROL

-	Embedded Telit Python Script
-	Embedded Telit IoT AppZone
X	External Microcontroller or Interface

15. DOCUMENTATION FILES TABLE

Schematic Files			
File Type	File Name	Format	Note
Schematic	B101AA-R1.pdf	PDF	
BOM		PDF or Excel	
Custom Components Datasheet		PDF	Antennas, custom components etc.

PCB Stack-up [4 Layer]				
Layer	File Name	POS/NEG	Dielectric Constant	Thickness [µm]
Silkscreen Top			-	
Paste Mask Top			-	
Solder Mask Top			-	
Copper 1 [Top]			-	
Dielectric 1				
Copper 2 [Inner 1]			-	
Dielectric 2				
Copper 3 [Inner 2]			-	
Dielectric 3				
Copper 4 [Bottom]			-	
Solder Mask Bottom			-	
Paste Mask Bottom			-	
Silkscreen Bottom			-	

Application Engineering
Design Review request form

PCB Extra Files				
File Type	File Name	Format	From Layer	To Layer
Silkscreen Top				
Paste Mask Top				
Solder Mask Top				
Copper 1 [Top]				
Dielectric 1				
Copper 2 [Inner 1]				
Dielectric 2				
Copper 3 [Inner 2]				
Dielectric 3				
Copper 4 [Bottom]				
Solder Mask Bottom				
Paste Mask Bottom				
Silkscreen Bottom				

Application Engineering
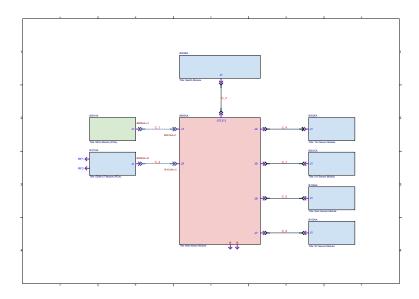Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 12/13

16.COMMENTS & PICTURES

13.09.2022

P101DA product includes 8 modules.

- B001AA - MCU Module (PCIe Connected)

- B101AA - IoT Module (PCIe Connected)

- B303BA - Manuel awake button (Connected via cable (In enclosure))

- B152AA - Rain sensor (Connected via cable (RS485))

- B153AA - Soil temperature sensor (Connected via cable (RS485))

- B501CA - UV Sensor (Connected via cable (In enclosure))

- B502EA - TH Sensor (Connected via cable (In enclosure))

- B905AA - Mother board

Device work flow:

Device includes sleeping power algorithm (on B905AA mother board) in every 30 minutes. If power enabled all system got powered. IoT module connects to internet on 2G or 4G and enables GPS location cold start. With in these time system measure all meteorological parameters (Temperature, humidity, rain, soil temperature, UV index, etc) them make a JSON data structure. Send this data over IoT and then sleeps again. If user press button on B303BA sleep system awakes the power.

All modules are attached on review request. Also make changes according your last review.

The electronic version of this document is the latest version. It is the responsibility of the individual to ensure that any paper material is the current version.
Printed material is uncontrolled documentation – Internal use only
Mod.0363 12-2016 Rev.6

Application Engineering
Design Review request form

Code : EA34174
Rev : R2
Date : 15.09.2022
Page : 13/13

17.CHANGE LOG

Change Log	
Revision	Description
00.00.01	Schematic creation.
00.00.02	Make all connected modules schematic and redesign B101AA IoT module structure.
00.00.03	* SIM Pin ESD updated. * GNSS-EN Pin bug updated. * FORCED_USB_BOOT pin bug updated. * USB lines are controlled on util board so can not be added to B905AA. * PPS pin bug update.