

SCHOOL OF COMPUTATION,
INFORMATION AND TECHNOLOGY —
INFORMATICS

TECHNISCHE UNIVERSITÄT MÜNCHEN

Master's Thesis in Informatics

**Establishing trust in an updatable fTPM
using remote attestation**

Andreas Korb

SCHOOL OF COMPUTATION,
INFORMATION AND TECHNOLOGY —
INFORMATICS

TECHNISCHE UNIVERSITÄT MÜNCHEN

Master's Thesis in Informatics

**Establishing trust in an updatable fTPM
using remote attestation**

**Herstellung von Vertrauen in ein
aktualisierbares fTPM durch Remote
Attestierung**

Author:	Andreas Korb
Supervisor:	Prof. Claudia Eckert
Advisors:	Albert Stark, Johannes Wiesböck
Submission Date:	15.12.2023

I confirm that this master's thesis is my own work and I have documented all sources and material used.

Munich, 15.12.2023

Andreas Korb

Acknowledgments

Abstract

Contents

Acknowledgments	iii
Abstract	iv
1 Introduction	1
1.1 Motivation	1
1.2 Goal	3
1.3 Threat Model	4
1.4 Environment	4
1.5 Outline	4
2 Background	5
2.1 Trusted execution environment	5
2.1.1 Arm TrustZone	6
2.1.2 Further TEE technologies	6
2.2 Attestation	7
2.2.1 Local attestation	7
2.2.2 Remote attestation	7
2.3 Trusted Platform Module	8
2.3.1 Discrete TPM	10
2.3.2 Firmware TPM	11
2.3.3 Virtual TPM	12
2.4 Secure Boot and Measured Boot	13
2.5 Device Identifier Composition Engine	14
3 Related Work	15
4 Methodology	16
4.1 Terminology	16
4.2 Architectural overview	16
4.3 Chaining DICE and TPM certificate infrastructure	16
4.4 Provisioning process	16
4.5 Attestation process	16

4.6	Updating the fTPM	16
4.7	Privacy	17
5	Implementation	18
5.1	Prover	18
5.1.1	Normal World	18
5.1.2	Secure World	18
5.2	Attester	18
5.3	Technical obstacles	18
6	Discussion	19
6.1	Assessment of the fulfillment of requirements	19
6.1.1	Security requirements	19
6.1.2	Attestation process requirements	19
6.2	Higher level protocols' compatibility	19
6.3	Implications of missing privacy	19
6.4	Hardware knowledge dependency	19
6.5	Hardware requirements DICE + fTPM vs TPM	19
6.6	Requires reproducible builds	19
6.7	Personal opinion about developed system	19
7	Future Work and Conclusion	20
7.1	Future Work	20
7.2	Conclusion	20
	Abbreviations	21
	List of Figures	22
	List of Tables	23
	Bibliography	24

1 Introduction

This chapter includes an explanation of the exact problem we are addressing, and why, a brief overview of our solution, and the attacks we are trying to fend off.

1.1 Motivation

Modern trust relationships, such as Zero Trust [1], require trustworthy platforms, which can reliably report their system state. In such models, trustworthiness can only be assumed after the platform configuration has been proved by all parties of the communication.

This is solved by remote attestation. In the simplest case, there is a prover and a verifier, as depicted in Figure 1.1. This requires the verifier to establish trust with software or hardware on the prover's machine that attests the remaining software running on the prover.



Figure 1.1: Simplified remote attestation process.

For example, this can be done with a Trusted Platform Module (TPM) on the prover's side. They rise in their deployments and importance, e.g., in 2013 the President's Council of Advisors on Science and Technology encourages the adoption of TPMs [2], and Microsoft publicized that they require a TPM module for Windows 11 in 2021 [3]. They provide remote attestation mechanisms of system states, and their applications are still expanding beyond their traditional use-cases. For example, they are used in anti-cheat software for games [4].

A dedicated hardware TPM (dTPM) increases cost and hardware complexity - especially for embedded platforms. Through Trusted execution environments (TEEs), such as Arm TrustZone, a firmware TPM (fTPM) can be used to provide similar security guarantees as a dTPM chip.

For a dTPM, which consists of an independent hardware unit manufactured by a single manufacturer and is directly activated by power, it is sufficient to identify its manufacturer and understand his provided guarantees. In contrast, an fTPM runs atop other firmware components and is started later in the boot chain, making its security dependent on the underlying firmware stack. As a result, the fTPM can only be trusted if the entire underlying firmware stack is also trusted, since the underlying firmware could modify, i.e., compromise, the fTPM component which is then not detected.

However, while a TPM-compliant component provides an infrastructure with which trust in it can be established remotely, i.e., an endorsement certificate, the underlying firmware stack is not represented by this.

Currently, this is solved by the manufacturer providing not only the fTPM, but also the entire underlying firmware stack. Consequently, by establishing trust to the manufacturer of the fTPM, one can implicitly trust the underlying firmware as well by assuming they also originate from this manufacturer. This is possible since in the most general sense, one can derive from an endorsement certificate the endorser, i.e., manufacturer, and if the attester trusts the manufacturer and the guarantees he provides, trust is established to his provided components.

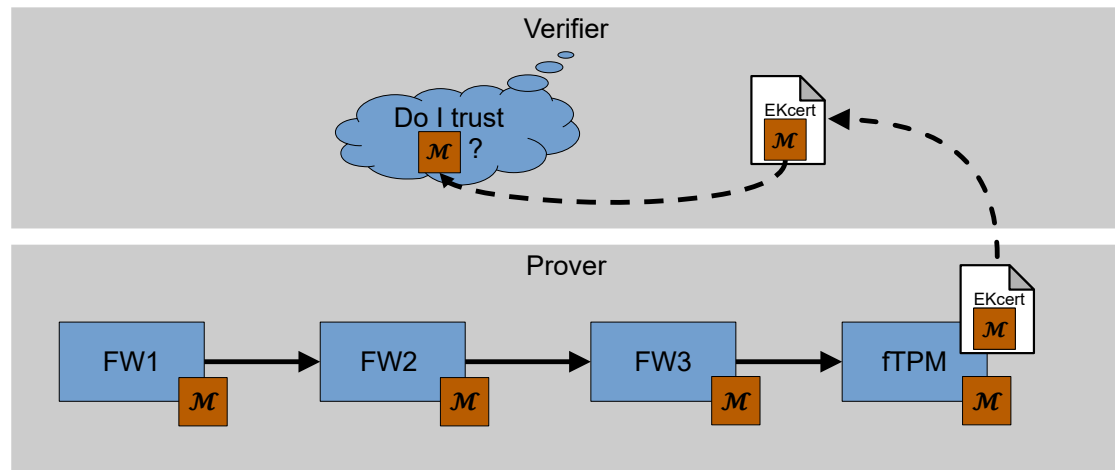


Figure 1.2: The state-of-the-art process how a verifier establishes trust to an fTPM, which is in fact done by trusting its manufacturer. The brown markers indicate a manufacturer. The firmware and the fTPM were built by manufacturer \mathcal{M} , and the EK certificate indicates this manufacturer.

This process is illustrated in figure Figure 1.2. The provers' area shows its boot chain, the verifiers' area shows how it evaluates the trustworthiness against the provers' boot chain. The verifier trusts the entire firmware chain if he trusts the manufacturer of each

individual component. Note how the verifier must assume that the manufacturer of the firmware components is the same as the manufacturer of the fTPM.

In summary, with the current approach, the endorser, usually a CPU manufacturer, provides the firmware up to the fTPM and guarantees the firmware is not modifiable by untrusted parties. This enables to establish trust the other firmware components this manufacturer provided without knowing the firmware.

This approach is limited, as with this mechanism, independent verifiers have to blindly trust the firmware manufacturer, which drastically limits trust relationships. In contrast, an independently verifiable fTPM stack, rooted in a hardware root of trust, can be leveraged in a zero trust environment without requiring additional hardware or compromising on security.

1.2 Goal

The goal is to break the requirement of the underlying firmware and the fTPM to originate from the same manufacturer, by providing the exact firmware component identities to the verifier, such that it can decide for itself whether they are trustworthy without relying on the manufacturer.

One mechanism enabling firmware attestation is the Device Identifier Composition Engine (DICE), focusing on resource-constrained devices. Although this mechanism shifts trust from the firmware provider to the hardware provider by allowing firmware attestation through a hardware root of trust, the exclusive use of this integrated solution is unsuitable for large dynamic systems, for example Linux based devices. Nevertheless, the advantage is that the identity of each component of the firmware boot chain is represented.

We propose a hybrid solution, combining the advantages of DICE and fTPMs, yielding an independently verifiable certificate chain representing the boot chain up to and including the fTPM. This enables a verifier to establish trust in an fTPM if the underlying firmware is benign as well and thus, providing a way to independently assess the properties of the fTPM.

The research questions are:

- What constitutes the identity of an fTPM?
- How to combine the DICE and TPM infrastructure?
- How to manage an fTPM's persistent data securely?
- How to enable privacy for the attestation mechanism?

1.3 Threat Model

The main threat is the modification of the binary of the fTPM before or during boot. For example, by exchanging the SD card storing the binary. However, we assume that the fTPM cannot be modified by malicious parties after the boot process regardless of whether the fTPM is benign or compromised because we trust the TEE environment. Out-of-scope are hardware attacks, side-channel attacks, control-flow attacks, and Denial of Service attacks.

For the network, we assume the Dolev-Yao attacker model [5]. That is, we consider an attacker who has the ability to perform any active or passive attacks on the network. The attacker may also have control over parts or the entire network, e.g., all routers, switches, and connections. However, attackers are limited in that they cannot control the end systems. They also cannot break cryptographic primitives, e.g., encryption, signing, and hashing.

1.4 Environment

This work was created at the 'Fraunhofer-Institut für Angewandte und Integrierte Sicherheit AISEC' in Garching. It is part of the 'Fraunhofer Society for the Promotion of Applied Research e. V.', which is an organization distributed over Europe with main focus on applied research. In the roughly 35 years of its existence, it rose to become the largest research institute in Europe with around 30,000 employees.

1.5 Outline

2 Background

This chapter discusses the relevant background knowledge required to understand the remainder of this work.

2.1 Trusted execution environment

One of the core security concepts of operating systems are the privilege levels of processes [6]. Thereby, processes are protected against other processes with the same or lower privilege level. However, they are not protected against more privileged processes [7]. This bears problems for example for cloud computing and edge computing. In cloud computing, other services, the hypervisor, or the cloud provider in general could potentially access sensitive data of the cloud tenant [8]. In edge computing, the edge applications deal with plain text data, while they are potentially running on insecure edge devices [9]. Hence, protection against more privileged processes is desired.

The Trusted execution environment (TEE) is a technology defined by GlobalPlatform¹ as an integrated hardware extension to processors. By that, the execution environment is separated into the Rich execution environment (REE) and the TEE by hardware. The REE runs commodity software, e.g., a Linux-based operating system with user applications. The TEE is an isolated tamper-resistant execution environment that guarantees the authenticity of the executed code, and the integrity of runtime states, e.g., memory [10]. Since a TEE is integrated into the processor, there is no separate chip required. Moreover, the TEE commonly follows the same user and kernel space separation as a rich OS. The kernel space is running a trusted OS, and the user space is running the trusted applications. It focuses on resisting software-based attacks generated in the REE, however, also protects against some hardware attacks [11].

Previous, mostly software-based technologies ensure confidentiality and integrity protection of data-in-transit and data-at-rest [12], while a TEE additionally protects data-in-use in hardware [12, 13].

Figure 2.1 illustrates the motivation. In the traditional architecture, i.e., without a TEE, if an attacker compromises the REE the full system is affected. With a TEE, the attacker is limited to the REE, while the TEE continues to protect the secure assets,

¹<https://globalplatform.org/>

such as encryption keys. This results from the observation that the attack surface of a rich OS is much larger than that of a trusted OS, e.g., due to its network connectivity and the high dynamics of software installations, while the attack surface of a trusted OS is rather small and has tightly controlled interfaces.

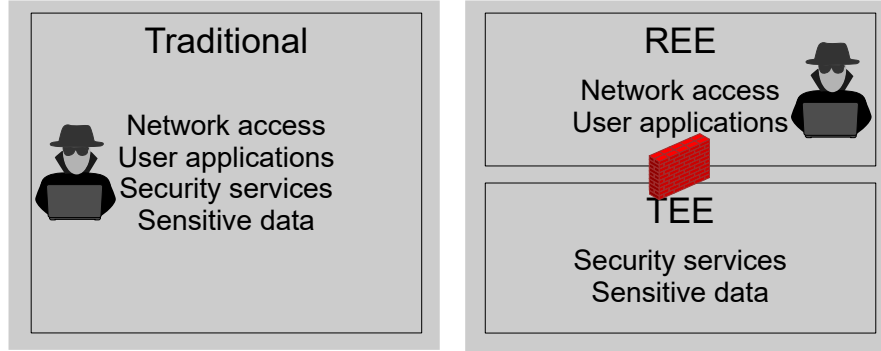


Figure 2.1: Comparison between a traditional architecture, and an architecture separating the REE and TEE. This illustrates the motivation of a TEE.

2.1.1 Arm TrustZone

One such TEE is ARM’s TrustZone [14, 15]. It partitions all software and hardware resources of the containing system into the Normal world (NW) and the Secure world (SW), as shown in Figure 2.2. The secure monitor is triggered by the dedicated instruction Secure Monitor Call (SMC), which then manages the context switches between the NW and the SW. While the SW can access the resources of the SW and the NW, the NW is restricted to its own assigned resources. Since ARM is the dominant processor architectures for IoT devices with a market share of 86 % [16], many of the approaches in this field of research use Arm TrustZone [17].

Our approach also leverages TrustZone to enable the execution and the remote attestation of an fTPM.

2.1.2 Further TEE technologies

Other TEE technologies are Intel Software Guard Extensions (SGX), and AMD Secure Encrypted Virtualization (SEV), in the future also Intel Trusted Domain Extensions (TDX), and ARM Confidential Computing Architecture (CCA). Since we focus on the implementation of our concept with ARM TrustZone, we do not go into detail about these other technologies here. However, since our concept is not tied to ARM processors and can also be applied to others, they are mentioned for the sake of completeness.



Figure 2.2: The architecture of Arm TrustZone for AArch64 [18]. The exception levels (EL) indicate the privilege levels.

2.2 Attestation

According to the Cambridge Dictionary an attestation is “a formal statement that you make and officially say is true”. Specifically in our context, attestation is a mechanism for software to prove its identity. In the following, the two types are discussed.

2.2.1 Local attestation

Local attestation enables assertions between two environments on the same system [19]. The claim of an environment can be verified by another environment, usually with the help of message authentication codes (MAC) [20]. For example, Intel SGX uses this mechanism to establish assertions between two enclaves [19].

2.2.2 Remote attestation

Remote attestation is a challenge-response protocol initiated by a remote attester. Figure 2.3 depicts a simplified overview of the data flow of a remote attestation. The process is initiated by a remote trusted party (called “verifier”) to verify that a target environment on the end-device (called “prover”) has not been tampered with [20, 22]. This challenge contains a nonce, enforcing a fresh response. The response must be an evidence of the challenged system that it is trustworthy. To build that, an attesting environment on the prover device generally inspects the following properties of a program: (i) its code and data has been correctly loaded into memory for execution, and (ii) its data has not been maliciously modified at runtime.



Figure 2.3: Data flow of remote attestation [21]. Initially, only the blue areas are trusted by the verifier. After the attestation, the verifier also trusts the target environment.

The attesting environment acts as a trust anchor for the verifier. A trusted anchor is required on the device to be attested because at least one trusted component is necessary to extract the data from the remote device to be verified. In many cases, TEE’s act as a trust anchor because they are hardware-protected, making it an excellent candidate for a trust anchor.

It typically consists of two parts [23]. (i) The attestation, and (ii) establishing a secure channel. In this work, we focus on the first step.

2.3 Trusted Platform Module

The Trusted Computing Group (TCG)² published the first TPM specification (v1.2) in 2009 [24], and the most current specification (v2.0 Revision 01.59) ten years later in 2019 [25]. It describes a cryptographic coprocessor that increases trust in the host platform. Specifically, this means that the platform exhibits the expected behavior and that this behavior can be trusted. For that, the TPM maintains a separated state from the host platform, which enables the TPM to take measurements of the host platform. It is also a passive device, meaning it only does something when prompted. Table 2.1 summarizes the main features of TPMs.

The Platform Configuration Registers (PCRs) are the fundament for the remote system attestation. They are one-way registers, which values can never be written to an exact value, but only be extended. This operation is known as ‘hash extend’ [26]. Its design prohibits the removal of extensions, which would cause the TPM to forget a measurement, and the arbitrary writing of values, which would overwrite

²<https://trustedcomputinggroup.org/>

Table 2.1: TPM main features and exemplary use-cases.

Feature	Use-case
Device identification	for a network provider to identify a machine before granting it access to its VPN network
Encryption	file and folder encryption on a device
Key Storage	Store keys securely
Random Number Generator	Seed the key generation algorithms
Platform Configuration Registers	Store measurements of system components taken during the boot process

any previously conducted measurements. A PCR value holds a hash representing the platform state. Thereby, a remote verifier can request a so-called ‘quote’ from the TPM on the host in question. A quote contains the hash of all requested PCR values and is digitally signed. Typically, a TPM contains 24 PCR registers³, as defined as the minimum by [27], with the lower PCR values representing the system boot process and the higher ones representing the events after the kernel is booted [26]. The fixed length of the PCR values is important for the memory-constrained nature of TPMs [26].

The PCR value at index i can only be modified, i.e., extended, by adding together the currently contained hash value and the new hash, as depicted in Equation 2.1 [25]. For the sake of correctness, it should be noted that not every PCR is initialized with zero, as implied in the equation. For example, the TPM PC Client Platform specification [27] defines that PCRs 1–15 are initialized with all bits set to 0, while PCRs 17–22 are initialized with all bits set to 1.

$$PCR(i)_{t=0} := 0, \quad PCR(i)_{t+1} := hash(PCR(i)_t \parallel new\ value) \quad (2.1)$$

TPM 1.2 is limited to SHA-1 hashes which are considered broken [28–30]. Although the SHA-1 uses in TPM 1.2 were analyzed to be not affected [31], cryptographic algorithms only become weaker over time [26]. In reaction, TPM 2.0 offers cryptographic agility and allows newer algorithms such as SHA-256. In general, TPM 2.0 is more flexible, and is always turned on, while a TPM 1.2 needed to be turned on manually. Also, TPM 2.0 is more consistent across different implementations because of broader specifications. TPM 2.0 is the focused version nowadays, e.g., Microsoft recommends TPM 2.0 over TPM 1.2 because of security advantages [32], and also requires TPM 2.0 for Windows 11 with SHA-256 PCR banks [3].

³Note that we are aware that ‘PCR register’ is a Redundant Acronym Syndrome, but we have chosen to leave it as such for clarity, as ‘PC register’ can be associated with other meanings.

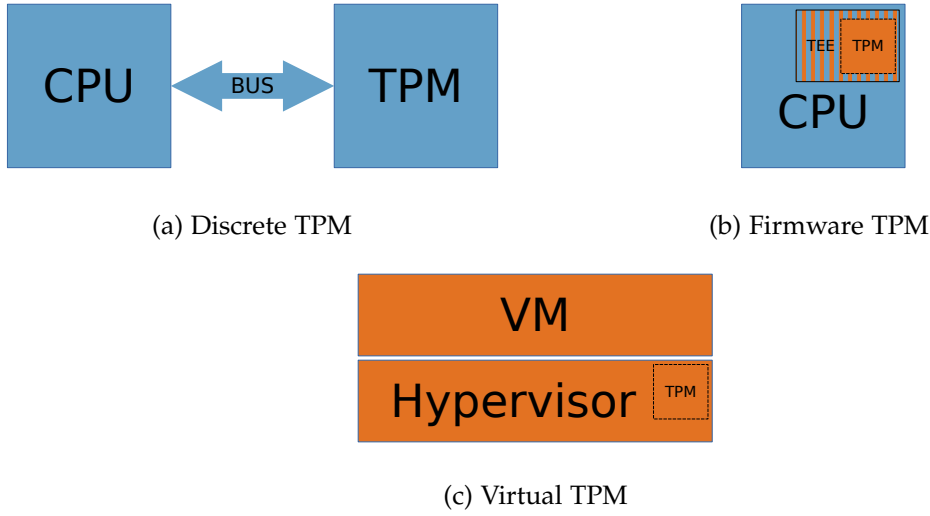


Figure 2.4: Schematic illustration of the different TPM types in their pure form. Blue: Hardware, Orange: Software.

There are three types of TPMs, as illustrated in Figure 2.4. They all offer the same functionality, but with different security guarantees and performance characteristics.

2.3.1 Discrete TPM

This is the classical form of a TPM. It is a dedicated piece of hardware, connected to the CPU via a bus. It is designed and manufactured to be highly temper-resistant against hardware attacks. The TPM specifications [25, 27] do not demand a specific bus system, however, they define the interfaces between the TPM and the following bus systems: LPC, I²C, and SPI.

The well-known ‘TPM Reset Attack’ was independently described in [33, 34]. It requires minimal hardware, precisely only a wire connecting the reset line of the LPC bus [35] to ground. This results in a reset signal for the TPM, yielding predictable values for the PCR registers, i.e., 0. This allows an attacker to replay the measurement log of a benign boot process to achieve valid PCR values, even though a modified chain has been booted. Since TPM 1.2, TCG provides a mitigation specification for this reset attack [36], requiring the BIOS to overwrite sensitive data after each unexpected reset, preventing an attacker to gain a valid measurement log. However, this mitigation is still vulnerable to cold boot attacks [37, 38].

Winter and Dietrich [38] demonstrate a bus modification attack at TPMs integrated with the LPC bus or the I²C bus. Their approach, labeled ‘Active LPC frame hijacking’,

allows them to "lift" commands to a higher locality than the one they were originally sent with. This allows them to evolve the 'TPM Reset attack' from being only usable for S-RTM, to also D-RTM systems. They also introduce a new approach of circumventing the TPM's measurement feature. Instead of resetting the TPM as previously described [33, 34], they reset the main device, i.e., the users' device like a desktop PC while preventing the TPM from receiving the reset signal. This keeps the state of the TPM, e.g., the valid PCR values of the previous boot procedure, and the attacker can hijack the boot procedure triggered by the platform's reset and boot a malicious operating system or firmware, while the TPM still stores the old and valid PCRs. While its conceptually easier since the attacker does not need to know the measurement log since the valid PCR values are already in-place, it requires active manipulation of bus transmissions to shield the TPM from the reset signal.

Seunghun Han et al. [39] report two attacks on discrete TPMs to reset the PCR registers. The first targets a gray area in the power management section of the TPM 2.0 specification. The TPM shall store its state into the (its?) non-volatile random access memory (NVRAM) before shutting down when the host platform goes to sleep, and restore it when it wakes up. However, the specification is missing a concrete description how to handle a lack of a stored state when waking up. Therefore, some implementations simply reset the state. Their second attack targets a DRTM, namely an implementation flaw in tboot [40], the most widely used measured boot environment used with Intel's Trusted Execution Technology. However, in their work, they found that some mutable function pointers are not measured, which allows attacks.

A time-based side-channel attack [41] during signature generation based on elliptic curves allows an attacker to recover 256-bit private keys for ECDSA and ECSchnorr signatures.

A passive sniffing attack is shown in [42]. It is applicable to TPM 1.1 connected to an LPC bus. They observed that the data of some operations like unsealing are transmitted via the bus in plain text. Since TPM 1.2, however, the modules no longer send sensitive data unencrypted [38].

That invasive hardware attacks against dTPMs are possible was already shown by Tarnovsky in 2010 [43]. However, this requires a lot of time, knowledge and resources, i.e., hardware and money.

2.3.2 Firmware TPM

As seen in the previous section about discrete TPMs, the bus between the CPU and a TPM can be considered as their biggest attack vector. An fTPM [44, 45] circumvents this by being directly executed within the CPU within a TEE, revealing no easily accessible bus. The trend is moving towards fTPMs, which can also be seen by the increasing

efforts to bring an fTPM to the RISC-V processor family [46]. Also, since they require only a TEE which is mostly already available at currently used processors, they are cheaper for manufacturers.

As of now, a fTPM is strictly bound to the processor manufacturer, such that you can trust the underlying firmware as well which is provisioned by the manufacturer, e.g., Intel, too. For example, common implementations are the Intel® Platform Trust Technology (Intel PTT) [47], and AMD's Secure Processor (AMD-SP), which in fact is an ARM-based coprocessor on the die which enables ARM's TrustZone [48].

Running on the main processor, e.g., a fully-fledged Arm Cortex core, entails an advantage and a disadvantage. On the one hand, running on the same processor as the rest of the system means less isolation, while a dedicated TPM (dTPM) brings its own processor that is completely isolated from the main processor. On the other hand, however, this processor is generally weak [44, 49]. Raj et al. [44] and Cheng et al. [50] independently concluded that the firmware-based modules are generally much faster after comparing the performance of fTPMs and dTPMs.

However, there are also disadvantages. First, they cannot provide true RNG, since hardware is required for that. Second, they are started later in the hosts' boot chain than a dTPM that is accessible from the beginning. This has the consequence that the hashes of the components booted before the fTPM cannot be sent to the fTPM. Last, fTPMs depend on more components for its security than single-component dTPMs, e.g., the TEE, and the boot chain.

Of course, there are also attacks against fTPMs. The previously mentioned side-channel attack [41] against dTPMs, can also be applied to fTPMs.

Jacob et al. [51] target proprietary AMD fTPMs by attacking their TEE, namely the AMD Secure Processor (AMD-SP). Thereby, they can expose the full internal state of the fTPM bypassing any authentication mechanisms. To do so, they leak the secret key from the BIOS flash chip which is used to derive the encryption and signature keys for the fTPMs non-volatile data. They achieve this by using a voltage fault injection that bypasses the authenticity check in the hosts' boot process and allows them to boot their own firmware component that leaks the required information.

Cfir Cohen from Google's cloud security team has uncovered an attack on fTPMs, which also runs on AMD-SP [52]. They store a maliciously crafted payload - a certificate - on the fTPM and trigger a function with a stack-based overflow error that accesses this payload, giving them full control over the program counter.

2.3.3 Virtual TPM

A vTPM is a software-based TPM provided by a hypervisor for one of its managed virtual machines [53]. The vTPMs can be realized fully in software [53], or backed

by dTPMs [54]. The hypervisor can provide a (theoretically) unlimited number of vTPMs. For the virtual machines it seems that they have access exclusive access to their own private TPM, even though all vTPMs are managed by the same hypervisor. A characteristic feature of virtual resources are their migration capabilities, i.e., they can be suspended and later continued on another machine. vTPMs support this as well. Note the different security properties between vTPMs and dTPMs.

Because of the increasing popularity of cloud computing, the research of vTPMs focuses less on specific attacks, and more on reducing the trusted computing base, i.e., privacy-focused. The initially proposed design [53] has a large trusted base, e.g., the operating system and the hypervisor need to be trusted.

Wang et al. [55] bring the vTPM into the TEE, namely Intel SGX, essentially creating an fTPM and vTPM hybrid. They launch each vTPM in a private hardware-protected enclave. This reduces the trusted computing base to the individual enclaves and SGX itself, enabling the host operating system and hypervisor to be untrusted.

Pecholt and Wessel [12] describe a design named CoCoTPM where the hypervisor and the hosts' operating system do not need to be trusted as well. This is realized by establishing an integrity-protected secure channel with end-to-end encryption between the driver in the VM and the software TPM on the host.

Stateless ephemeral vTPMs [56] eliminate the need of manually establishing a secure channel by leveraging the confidential VM memory encryption provided by AMD's SEV-SNP, a variant of AMD secure encrypted virtualization (SEV) technology. Ephemeral vTPMs support the remote attestation of virtual machines. However, they intentionally do not support persistent storage to preclude exfiltration attacks on stored TPM state, which has the disadvantage that persistent keys or nonvolatile indexes cannot be stored.

2.4 Secure Boot and Measured Boot

When the system is started, the root component, e.g., from ROM, is executed. This subsequently launches the next component, and so forth. This boot structure is called the boot chain. Typically, the first component turns on the memory, the second stage initializes the platform, and finally, the last stage boots the operating system [57].

Secure Boot [58–60] is locally attesting components of the boot chain directly at boot-time. For that, the boot component is equipped with a public key. With that, they verify the digital signature of the respective subsequent component, before handing over the execution. This ensures the authenticity of the boot components. The first boot component, usually stored in ROM, needs to be trusted without verification, i.e., it acts as the root of trust. However, Secure Boot does not prevent downgrade attacks, since only the authenticity, but not the concrete versions of boot components are verified [61].

Hence, further defenses like Measured Boot have been designed.

Measured Boot [62] is a concept that is implemented in interplay with a TPM. It allows remote attestation to a later time. Just as with Secure Boot, each boot component hashes the subsequent component. However, instead of directly locally attesting the measured value, the hash value is passed to the TPM to extend a PCR value. As described in Section 2.3, these values can be used by a remote attester to verify the state of the software on the system. The goal is to detect manipulated system configurations.

Secure Boot and Measured Boot are often used in conjunction.

2.5 Device Identifier Composition Engine

To the best of our knowledge, DICE is so far considered a secure concept apart from physical attacks, only implementation problems can mean security problems.

3 Related Work

In the following, we describe defense mechanisms for fTPMs that can be seen as complementary to our approach. They all have in common that they offer no way for a third party to ensure that the hardened fTPM is actually running on the device under test, which is exactly what our work aims to cover.

One approach is to verify the code of fTPMs [63]. Here, the TPM 1.2 code is written in a functional programming language that enables automatic verification.

There exist efforts to improve the security of TPM by introducing the concept of hybrid TPMs [64, 65]. Kim and Kim [64] extend a hardware TPM with software support, which they name hTPM. This increases the defense of the TPM, e.g., circumventing side-channel attacks, and also enables more secure TPM functions, e.g., enabling true random number generation. Their hTPM implementation also shows significantly better performance due to the use of modern CPU features. Vice versa, Gross et al. [65] propose the reverse approach of backing an fTPM with hardware. While their implementation has similar properties to hTPM, it inherits some downsides of fTPMs. For example, their fTPM is still started later in the boot chain than a dTPM, which is not the case for hTPM. However, it is easier to update than hTPM since the lack of a dTPM, and the overall design is simpler.

4 Methodology

4.1 Terminology

4.2 Architectural overview

4.3 Chaining DICE and TPM certificate infrastructure

4.4 Provisioning process

4.5 Attestation process

$$trusted(C_i) := \bigwedge_{k=0}^i trusted(C_k) \quad (4.1)$$

4.6 Updating the fTPM

We consider it as critical that the fTPM is updatable. This is due to the history of fTPMs showing vulnerabilities which have been patched consequently.

Our fTPM can be only updated with the system shut down. This is due to the required out-of-band signing procedure of trusted applications before being deployed. This also with while system is shut down. This ensures that the TCI part of the EKcert generated at boot-time does not become obsolete, in other words, keeps representing the state of the currently running fTPM.

To protect against downgrade attacks: NV data is encrypted/integrity with AESP. Encryption required to ensure confidentiality AESP used to also ensure integrity. This is required since also the cipher text of the NV could be modified, which might change security critical information. Encryption-only would not prohibit that. As soon as an integrity violation is detected, the fTPM is fully reset, effectively invalidating all previously stored data. Note that an attacker could thereby easily trigger a data loss. This has to be avoided by integrating the good-practices with working with a TPM, which includes having secrets stored also elsewhere. This introduces storage and memory overhead. Processing overhead only slightly, since the data is already decrypted during

start-time, which happens only once at boot time, and then later data is encrypted only while it is stored, which happens only ... Hence, there is no performance penalty during common uses of a TPM, e.g., key creation.

This might seem redundant because of the storage protection of for example TrustZone, but this does not protect against downgrade attacks. With our approach, the access to the data is bound to the exact identity of the fTPM including all underlying firmware.

So, our protection additionally protects data-at-rest, while the data-at-use is protected by the TEE's secure memory, i.e., the memory isolation from the normal world.

4.7 Privacy

5 Implementation

5.1 Prover

5.1.1 Normal World

5.1.2 Secure World

Measuring the fTPM

5.2 Attester

5.3 Technical obstacles

6 Discussion

6.1 Assessment of the fulfillment of requirements

6.1.1 Security requirements

6.1.2 Attestation process requirements

TCG defines as part of their Trusted Attestation Protocol [66] the requirements for an attestation process to provide assurance to a verifier that it is (i) accurate, (ii) interpretable, and (iii) attributable.

(i) Accurate attestation data represents the actual state of the device. This includes freshness, i.e., the data is not replayed and does not represent an old, outdated state of the device.

(ii) Intuitively, the data must be interpretable by the verifier. In other words, the verifier must be able to derive a decision about the trustworthiness of the prover based on the attestation data.

(iii) It must be possible to assign the attestation data to a specific device, i.e., it must be verifiable that the attestation data originates from the prover.

6.2 Higher level protocols' compatibility

6.3 Implications of missing privacy

6.4 Hardware knowledge dependency

6.5 Hardware requirements DICE + fTPM vs TPM

6.6 Requires reproducible builds

6.7 Personal opinion about developed system

7 Future Work and Conclusion

7.1 Future Work

7.2 Conclusion

Abbreviations

TPM Trusted Platform Module

fTPM firmware TPM

dTPM dedicated TPM

DICE Device Identifier Composition Engine

TEE Trusted execution environment

REE Rich execution environment

PCR Platform Configuration Register

TCG Trusted Computing Group

NW Normal world

SW Secure world

List of Figures

1.1	Simplified remote attestation process.	1
1.2	The state-of-the-art process how a verifier establishes trust to an fTPM, which is in fact done by trusting its manufacturer. The brown markers indicate a manufacturer. The firmware and the fTPM were built by manufacturer \mathcal{M} , and the EK certificate indicates this manufacturer. . .	2
2.1	Comparison between a traditional architecture, and an architecture separating the REE and TEE. This illustrates the motivation of a TEE.	6
2.2	The architecture of Arm TrustZone for AArch64 [18]. The exception levels (EL) indicate the privilege levels.	7
2.3	Data flow of remote attestation [21]. Initially, only the blue areas are trusted by the verifier. After the attestation, the verifier also trusts the target environment.	8
2.4	Schematic illustration of the different TPM types in their pure form. Blue: Hardware, Orange: Software.	10

List of Tables

2.1	TPM features	9
-----	------------------------	---

Bibliography

- [1] T. Stremlau. "A Trusted Secure Ecosystem Begins With Self-Protection." In: *ISACA Journal* 4 (July 2021).
- [2] P. C. of Advisors on Science and Technology. *Immediate opportunities for strengthening the nation's cybersecurity*. Nov. 2013.
- [3] Microsoft. *Windows 11 Minimum Hardware Requirements*. June 2021. URL: <https://learn.microsoft.com/en-us/windows-hardware/design/minimum/minimum-hardware-requirements-overview>.
- [4] D. Sims. *Valorant's anti-cheat system requires TPM 2.0 and secure boot on Windows 11*. Sept. 2021. URL: <https://www.techspot.com/news/91138-valorant-anti-cheat-system-requires-tpm-20-secure.html>.
- [5] D. Dolev and A. Yao. "On the security of public key protocols." In: *IEEE Transactions on Information Theory* 29.2 (Mar. 1983), pp. 198–208. DOI: 10.1109/tit.1983.1056650.
- [6] T. A. Linden. "Operating System Structures to Support Security and Reliable Software." In: *ACM Computing Surveys* 8.4 (Dec. 1976), pp. 409–445. DOI: 10.1145/356678.356682.
- [7] S. Bratus, P. C. Johnson, A. Ramaswamy, S. W. Smith, and M. E. Locasto. "The cake is a lie." In: *Proceedings of the 1st ACM workshop on Virtual machine security*. ACM, Nov. 2009. DOI: 10.1145/1655148.1655154.
- [8] S. Nimgaonkar, S. Kotikela, and M. Gomathisankaran. "CTrust: A Framework for Secure and Trustworthy Application Execution in Cloud Computing." In: *2012 International Conference on Cyber Security*. IEEE, Dec. 2012. DOI: 10.1109/cybersecurity.2012.10.
- [9] Z. Ning, J. Liao, F. Zhang, and W. Shi. "Preliminary Study of Trusted Execution Environments on Heterogeneous Edge Platforms." In: *2018 IEEE/ACM Symposium on Edge Computing (SEC)*. IEEE, Oct. 2018. DOI: 10.1109/sec.2018.00057.
- [10] M. Sabt, M. Achemlal, and A. Bouabdallah. "Trusted Execution Environment: What It is, and What It is Not." In: *2015 IEEE Trustcom/BigDataSE/ISPA*. IEEE, Aug. 2015. DOI: 10.1109/trustcom.2015.357.

- [11] GlobalPlatform. *TEE System Architecture Version 1.2*. Nov. 2018.
- [12] J. Pecholt and S. Wessel. "CoCoTPM: Trusted Platform Modules for Virtual Machines in Confidential Computing Environments." In: *Proceedings of the 38th Annual Computer Security Applications Conference*. ACM, Dec. 2022. DOI: 10.1145/3564625.3564648.
- [13] D. Lee. "Building Trusted Execution Environments." PhD thesis. EECS Department, University of California, Berkeley, May 2022. URL: <http://www2.eecs.berkeley.edu/Pubs/TechRpts/2022/EECS-2022-96.html>.
- [14] ARM Limited. *ARM Security Technology - Building a Secure System using TrustZone Technology*. Issue C. 2009.
- [15] B. Ngabonziza, D. Martin, A. Bailey, H. Cho, and S. Martin. "TrustZone Explained: Architectural Features and Use Cases." In: *2016 IEEE 2nd International Conference on Collaboration and Internet Computing (CIC)*. IEEE, Nov. 2016. DOI: 10.1109/cic.2016.065.
- [16] E. foundation. *IoT & Edge Developer Survey Report*. (Accessed July 2022). 2022. URL: <https://outreach.eclipse.foundation/iot-edge-developer-2021>.
- [17] D. C. G. Valadares, N. C. Will, J. Caminha, M. B. Perkusich, A. Perkusich, and K. C. Gorgonio. "Systematic Literature Review on the Use of Trusted Execution Environments to Protect Cloud/Fog-Based Internet of Things Applications." In: *IEEE Access* 9 (2021), pp. 80953–80969. DOI: 10.1109/access.2021.3085524.
- [18] Arm. *Security in an ARMv8 System*. 2017.
- [19] I. Anati, S. Gueron, S. Johnson, and V. Scarlata. "Innovative Technology for CPU Based Attestation and Sealing." In: 2013.
- [20] J. Ménétrey, C. Göttel, A. Khurshid, M. Pasin, P. Felber, V. Schiavoni, and S. Raza. "Attestation Mechanisms for Trusted Execution Environments Demystified." In: *Distributed Applications and Interoperable Systems*. Springer International Publishing, 2022, pp. 95–113. DOI: 10.1007/978-3-031-16092-9_7.
- [21] H. Birkholz, D. Thaler, M. Richardson, N. Smith, and W. Pan. *Remote ATtestation procedureS (RATS) Architecture*. RFC 9334. Jan. 2023. DOI: 10.17487/RFC9334. URL: <https://www.rfc-editor.org/info/rfc9334>.
- [22] G. Coker, J. Guttman, P. Loscocco, A. Herzog, J. Millen, B. O'Hanlon, J. Ramsdell, A. Segall, J. Sheehy, and B. Sniffen. "Principles of remote attestation." In: *International Journal of Information Security* 10.2 (Apr. 2011), pp. 63–81. DOI: 10.1007/s10207-011-0124-7.

- [23] J. M. McCune, B. J. Parno, A. Perrig, M. K. Reiter, and H. Isozaki. "Flicker." In: *ACM SIGOPS Operating Systems Review* 42.4 (Apr. 2008), pp. 315–328. doi: 10.1145/1357010.1352625.
- [24] ISO/IEC 11889:2009. *Trusted Platform Module*. Standard. Geneva, CH: International Organization for Standardization, May 2009.
- [25] Trusted Computing Group. *Trusted Platform Module Library Specification*. Family "2.0", Level 00, Revision 01.59. May 2019.
- [26] W. Arthur. *A Practical Guide to TPM 2.0 Using the New Trusted Platform Module in the New Age of Security. Using the New Trusted Platform Module in the New Age of Security*. Springer Nature, 2015, p. 392. ISBN: 9781430265849.
- [27] Trusted Computing Group. *TCG PC Client Platform Firmware Profile Specification*. Level 00 Version 1.05 Revision 23. May 2021.
- [28] V. Rijmen and E. Oswald. *Update on SHA-1*. Cryptology ePrint Archive, Paper 2005/010. <https://eprint.iacr.org/2005/010>. 2005. URL: <https://eprint.iacr.org/2005/010>.
- [29] X. Wang, Y. L. Yin, and H. Yu. "Finding Collisions in the Full SHA-1." In: *Advances in Cryptology – CRYPTO 2005*. Springer Berlin Heidelberg, 2005, pp. 17–36. doi: 10.1007/11535218_2.
- [30] M. Stevens, E. Bursztein, P. Karpman, A. Albertini, and Y. Markov. "The First Collision for Full SHA-1." In: *Advances in Cryptology – CRYPTO 2017*. Springer International Publishing, 2017, pp. 570–596. doi: 10.1007/978-3-319-63688-7_19.
- [31] K. Goldman and S. Potter. *SHA-1 Uses in TPM v1.2*. Apr. 2010.
- [32] Microsoft. *TPM recommendations*. Feb. 2023. URL: <https://learn.microsoft.com/en-us/windows/security/information-protection/tpm/tpm-recommendations>.
- [33] B. Kauer. "OSLO: Improving the Security of Trusted Computing." In: *16th USENIX Security Symposium (USENIX Security 07)*. Boston, MA: USENIX Association, Aug. 2007. URL: <https://www.usenix.org/conference/16th-usenix-security-symposium/oslo-improving-security-trusted-computing>.
- [34] E. R. Sparks. "A Security Assessment of Trusted Platform Modules." In: *Dartmouth College Undergraduate Theses* (2007).
- [35] Intel. *Intel® Low Pin Count (LPC)*. Aug. 2002. URL: <https://www.intel.com/content/dam/www/program/design/us/en/documents/low-pin-count-interface-specification.pdf>.

- [36] Trusted Computing Group. *TCG PC Client Platform Reset Attack Mitigation Specification*. Family “2.0”, Version 1.10 Revision 17. Jan. 2019.
- [37] J. A. Halderman, S. D. Schoen, N. Heninger, W. Clarkson, W. Paul, J. A. Calandrino, A. J. Feldman, J. Appelbaum, and E. W. Felten. “Lest we remember.” In: *Communications of the ACM* 52.5 (May 2009), pp. 91–98. doi: 10.1145/1506409.1506429.
- [38] J. Winter and K. Dietrich. “A hijacker’s guide to communication interfaces of the trusted platform module.” In: *Computers & Mathematics with Applications* 65.5 (Mar. 2013), pp. 748–761. doi: 10.1016/j.camwa.2012.06.018.
- [39] S. Han, W. Shin, J.-H. Park, and H. Kim. “A Bad Dream: Subverting Trusted Platform Module While You Are Sleeping.” In: *27th USENIX Security Symposium (USENIX Security 18)*. Baltimore, MD: USENIX Association, Aug. 2018, pp. 1229–1246. ISBN: 978-1-939133-04-5. URL: <https://www.usenix.org/conference/usenixsecurity18/presentation/han>.
- [40] Intel. *Trusted Boot*. URL: <https://www.sourceforge.net/projects/tboot>.
- [41] D. Moghimi, B. Sunar, T. Eisenbarth, and N. Heninger. *TPM-FAIL: TPM meets Timing and Lattice Attacks*. 2019. doi: 10.48550/ARXIV.1911.05673.
- [42] K. Kursawe, D. Schellekens, and B. Preneel. “Analyzing trusted platform communication.” In: 2005.
- [43] C. Tarnovsky. *Hacking the smartcard chip*. 2010. URL: <http://www.blackhat.com/html/bh-dc-10/bh-dc-10-archives.html>.
- [44] H. Raj, S. Saroiu, A. Wolman, R. Aigner, J. Cox, P. England, C. Fenner, K. Kinshumann, J. Loeser, D. Mattoon, M. Nystrom, D. Robinson, R. Spiger, S. Thom, and D. Wooten. *fTPM: A Firmware-based TPM 2.0 Implementation*. Tech. rep. MSR-TR-2015-84. Nov. 2015. URL: <https://www.microsoft.com/en-us/research/publication/ftpm-a-firmware-based-tpm-2-0-implementation/>.
- [45] H. Raj, S. Saroiu, A. Wolman, R. Aigner, J. Cox, P. England, C. Fenner, K. Kinshumann, J. Loeser, D. Mattoon, M. Nystrom, D. Robinson, R. Spiger, S. Thom, and D. Wooten. “fTPM: A Software-Only Implementation of a TPM Chip.” In: *25th USENIX Security Symposium (USENIX Security 16)*. Austin, TX: USENIX Association, Aug. 2016, pp. 841–856. ISBN: 978-1-931971-32-4. URL: <https://www.usenix.org/conference/usenixsecurity16/technical-sessions/presentation/raj>.
- [46] M. Boubakri, F. Chiatante, and B. Zouari. “Towards a firmware TPM on RISC-V.” In: *2021 Design, Automation & Test in Europe Conference & Exhibition (DATE)*. IEEE, Feb. 2021. doi: 10.23919/date51398.2021.9474152.
- [47] S. Domas. *11th Gen Intel® Core™ Processor Security*. Tech. rep. Intel®, 2021.

- [48] F. Khalid and A. Masood. "Hardware-Assisted Isolation Technologies: Security Architecture and Vulnerability Analysis." In: *2020 International Conference on Cyber Warfare and Security (ICCWS)*. IEEE, Oct. 2020. DOI: 10.1109/iccws48432.2020.9292371.
- [49] W. Goh and C. K. Yeo. "Teaching an Old TPM New Tricks: Repurposing for Identity-Based Signatures." In: *IEEE Security & Privacy* 11.5 (Sept. 2013), pp. 28–35. DOI: 10.1109/msp.2013.53.
- [50] J. L. Cheng, K. C. Chen, H. W. Zhang, W. Y. Chen, and D. Y. Wu. "Emulating Trusted Platform Module 2.0 on Raspberry Pi 2." In: *International Journal of Security, Privacy and Trust Management* 9.3 (Aug. 2020), pp. 1–11. DOI: 10.5121/ijsp.2020.9301.
- [51] H. N. Jacob, C. Werling, R. Bühren, and J.-P. Seifert. *faultTPM: Exposing AMD fTPMs' Deepest Secrets*. 2023. DOI: 10.48550/ARXIV.2304.14717.
- [52] C. Cohen. *AMD-PSP: fTPM Remote Code Execution via crafted EK certificate*. Jan. 2018. URL: <https://seclists.org/fulldisclosure/2018/Jan/12>.
- [53] S. Berger, R. Caceres, K. A. Goldman, R. Perez, R. Sailer, and L. van Doorn. "vTPM: Virtualizing the Trusted Platform Module." In: *15th USENIX Security Symposium (USENIX Security 06)*. Vancouver, B.C. Canada: USENIX Association, July 2006. URL: <https://www.usenix.org/conference/15th-usenix-security-symposium/vtpm-virtualizing-trusted-platform-module>.
- [54] D. Liu, J. Lee, J. Jang, S. Nepal, and J. Zic. "A Cloud Architecture of Virtual Trusted Platform Modules." In: *2010 IEEE/IFIP International Conference on Embedded and Ubiquitous Computing*. IEEE, Dec. 2010. DOI: 10.1109/euc.2010.125.
- [55] J. Wang, C. Fan, J. Wang, Y. Cheng, Y. Zhang, W. Zhang, P. Liu, and H. Hu. *SvTPM: A Secure and Efficient vTPM in the Cloud*. 2019. DOI: 10.48550/ARXIV.1905.08493.
- [56] V. Narayanan, C. Carvalho, A. Ruocco, G. Almási, J. Bottomley, M. Ye, T. Feldman-Fitzthum, D. Buono, H. Franke, and A. Burtsev. *Remote attestation of SEV-SNP confidential VMs using e-vTPMs*. 2023. DOI: 10.48550/ARXIV.2303.16463.
- [57] J. Yao and V. Zimmer. *Building Secure Firmware*. Apress, 2020. DOI: 10.1007/978-1-4842-6106-4.
- [58] J. Hendricks and L. van Doorn. "Secure bootstrap is not enough." In: *Proceedings of the 11th workshop on ACM SIGOPS European workshop*. ACM, Sept. 2004. DOI: 10.1145/1133572.1133600.
- [59] UEFI Forum, Inc. *Unified Extensible Firmware Interface (UEFI) Specification Version 2.10*. Aug. 2022.

- [60] J. Frazelle. “Securing the boot process.” In: *Communications of the ACM* 63.3 (Feb. 2020), pp. 38–42. DOI: 10.1145/3379512.
- [61] Z. Tao, A. Rastogi, N. Gupta, K. Vaswani, and A. V. Thakur. “DICE*: A Formally Verified Implementation of DICE Measured Boot.” In: *30th USENIX Security Symposium (USENIX Security 21)*. USENIX Association, Aug. 2021, pp. 1091–1107. ISBN: 978-1-939133-24-3. URL: <https://www.usenix.org/conference/usenixsecurity21/presentation/tao>.
- [62] Trusted Computing Group. *TCG EFI Platform Specification*. Version 1.22 Revision 15. Jan. 2014.
- [63] A. Mukhamedov, A. D. Gordon, and M. Ryan. “Towards a Verified Reference Implementation of a Trusted Platform Module.” In: *Security Protocols XVII*. Springer Berlin Heidelberg, 2013, pp. 69–81. DOI: 10.1007/978-3-642-36213-2_11.
- [64] Y. Kim and E. Kim. “hTPM.” In: *Proceedings of the 1st ACM Workshop on Cyber-Security Arms Race*. ACM, Nov. 2019. DOI: 10.1145/3338511.3357348.
- [65] M. Gross, K. Hohentanner, S. Wiehler, and G. Sigl. “Enhancing the Security of FPGA-SoCs via the Usage of ARM TrustZone and a Hybrid-TPM.” In: *ACM Transactions on Reconfigurable Technology and Systems* 15.1 (Nov. 2021), pp. 1–26. DOI: 10.1145/3472959.
- [66] Trusted Computing Group. *TCG Trusted Attestation Protocol (TAP) Information Model for TPM Families 1.2 and 2.0 and DICE Family 1.0*. Version 1.0 Revision 0.36. Sept. 2019.