
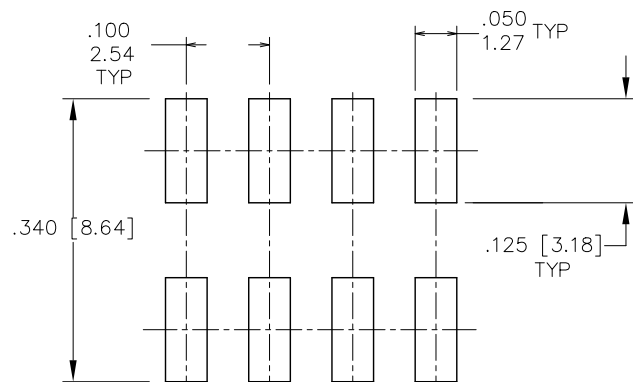
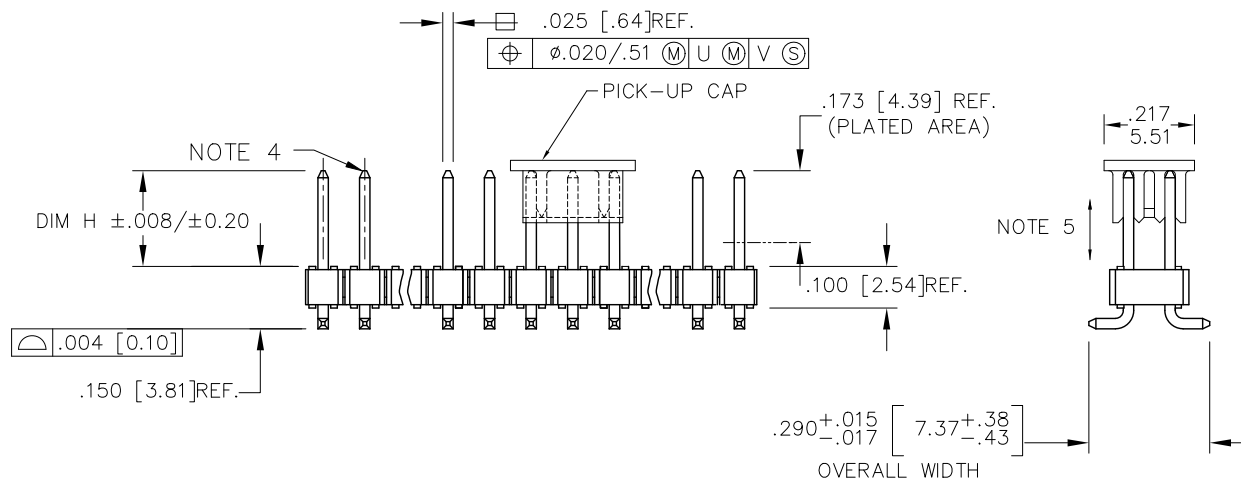
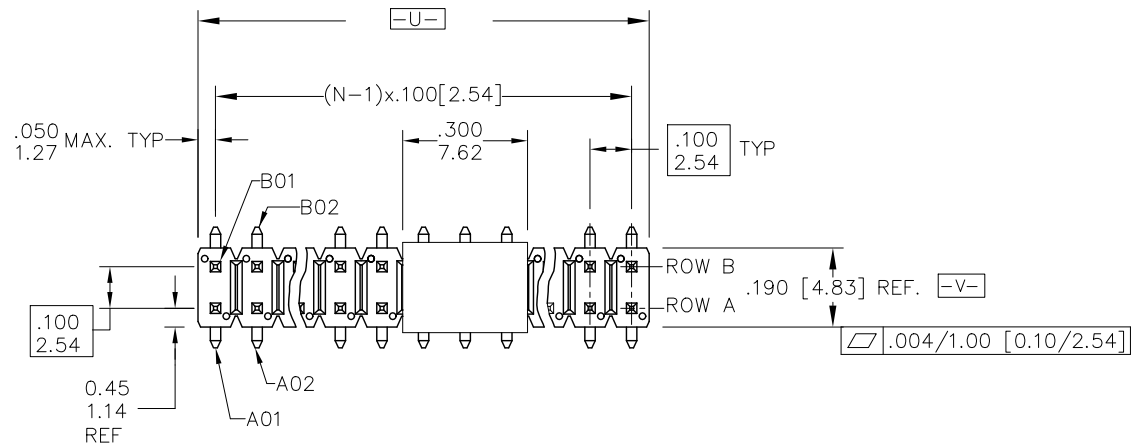



10129383 - X YY XXX X LF

BASE PART NO.



RECOMMENDED PAD LAYOUT
SCALE 4:1

mat'l. code SEE NOTES 1				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family ECONOSTIK									
ltr	ecn no	dr	date	tolerances unless otherwise specified						 INCH/mm		title ECONOSTIK HEADER .100/2.54cc DR SMT							
A	NEW	ZK	04/23/14	angles		linear													
B	ELX-N-18529	ZK	08/14/14																
C	ELX-N-42423	MK	21/09/23	X±2°						scale 2:1		dwg no sheet 1 of 2 10129383 A4 type Product Customer Drawing							
				dr	ZK HU		04/23/14												
				enrg	ZK HU		04/23/14												
				chr	RICK BIAN		04/23/14												
				appd	RICK BIAN		04/23/14												
sheet index		revision sheet		C	C														
				1	2														

Amphenol
FCI

© 2016 AFCI

1		2		3	4		5		6		
PRODUCT NUMBER		MATING LENGTH		POLARIZED PIN		PIN PLATING CODES:					
		DIM H	DIM H			10129383-9YYXXXXLF		1u"/0.025u MIN Au OVER 50u"/1.27u MIN Ni			
		ENGLISH	METRIC	AXX	BXX						
10129383-YYY001XLF		0.230	5.84	---	---						
10129383-YYY002XLF		0.318	8.08	---	---						
10129383-YYY003XLF		0.230	5.84	A09	B09						
<p>NOTES:</p> <p>1. MATERIAL BODAY MATERIAL: HIGH TEMPERATURE THERMOPLASTIC. FLAME UL94-V0, BLACK. PIN MATERIAL: COPPER ALLOY.</p> <p>2. ANY NUMBER OF POSITIONS FROM 4(2X2) TO 40(2X20). PRODUCT MAYBE CUTTING TO POSITION, THE CUTTING PLASH IS 0.02[0.51] MAX.</p> <p>3. PACKING STYLE DEFINITION. B: PACKED WITH POLY BAG T: PACKED WITH TUBE A: PACKED WITH TAPE AND REEL WITH PICK UP CAP C: PACKED WITH TAPE AND REEL WITHOUT PICK UP CAP</p> <p>4. TWO SIDES OF PIN TIPS NOT PLATED, TYPICAL BOTH ENDS.</p> <p>5. 2LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION BEFORE REFLOW.</p> <p>6. THE OAL DONT EXCEED 1 INCH / 25.4MM.</p> <p>7. ADD LF AT THE END OF PART NUMBER IS FOR LEAD FREE</p> <p>8. THESE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.</p> <p>9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.</p> <p>10. PRODUCT SPECIFICATION: GS-12-1223</p>											
sheet index		revision sheet									