


enta300
TAKING A
UNIQUE
PERSPECTIVE

TK ELEVATOR
MOVES PEOPLE -
THE FUTURE OF
URBAN MOBILITY






enta300 taking a unique perspective

A heavy-duty machineroom-less elevator for low to mid-rise applications which demand high-performance, enta300 is the solution for infrastructure projects and multi-purpose buildings.




Realizes your vision

Combining German elevator engineering excellence with innovative design and flexibility, enta300 delivers the unique vision you have for your project.



Tailored to your needs

Whether by integrating intelligent management systems for your building or enhancing each passenger journey with infotainment, safety and security features, enta300 is the passenger transportation solution that your project needs.



Gives a unique perspective

Demanding projects need outstanding design solutions, so enta300 gives designers the freedom to customize and meet your unique challenges.

DESIGNED FOR

- Infrastructure
- Shopping malls
- Stadiums
- Museums
- Hotels
- Hospitals
- Offices

SPECIFICATIONS

- Max. travel height: $\leq 120\text{m}$
- Max. number of floors: ≤ 40
- Max. load: $\leq 5000\text{kg}$
- Rated speed: $\leq 2.0\text{m/s}$

enta300
TAKING
A UNIQUE
PERSPECTIVE



Realizes your vision

Specified to enhance high-traffic buildings

Designed to accommodate the diverse demands of the high-traffic market segment, from metro stations, airports and malls, to stadiums and museums; enta300 meets complex customization requirements with peerless technical specifications and German engineering excellence. This heavy-duty flexibility will realize the most demanding visions.

Renowned German engineering

Founded on a long history of German engineering quality and innovation, over the years TK Elevator has grown into one of the world's leading elevator companies. Driven to address the diverse challenges of urbanization, we have pioneered unique technologies including many 'industry first' products such as our TWIN and MULTI concepts.

To meet the needs of heavy-duty applications, enta300 continues the TK Elevator tradition of engineering excellence.



Tailored to your needs

enta300's innovative intelligent systems mean that your elevator operations can be tailored to meet the ever-changing needs of your building. While passenger journeys are enhanced by attractive features and clearly presented information.



Optimize building operations

Monitor, control and schedule units from anywhere and at any time using INSIGHT, our web-enabled management solution. With additional features ranging from live video to in-depth performance analysis reporting, INSIGHT enables building management to keep on top of elevator operations, wherever they are located.

Enrich the passenger experience

In-car screens clearly display elevator status and are programmable to present audio visual messages, infotainment and content to entertain and inform passengers.




└ Gives a unique perspective

Customized designs beyond trends

Engineered to allow a high decoration weight, each car has the capacity to be configured to fit the needs and uses of a wide range of buildings, while always providing a comfortable ride and unique passenger experience.

Fully customizable for heavy-duty and infrastructural projects requiring the most robust and durable cabin designs; or for special architectural applications, enta300 offers endless cabin design possibilities.

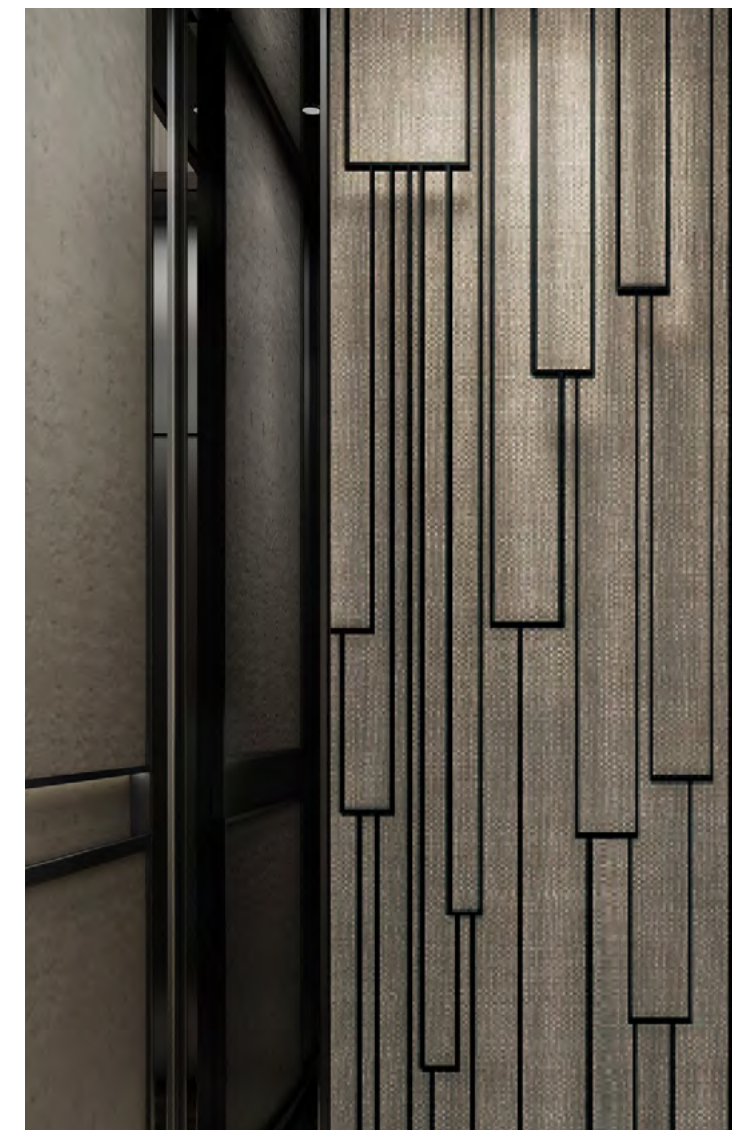

VARIETY
OF CHOICE

STRONG
PARTNER


NEAT
CABIN BUILT



Countless cabin designs

Turn your enta300 elevators into a focal point of your project or let them integrate seamlessly into the architectural environment.

Be inspired by these design trends, curated by our team – but please don't let them limit you!

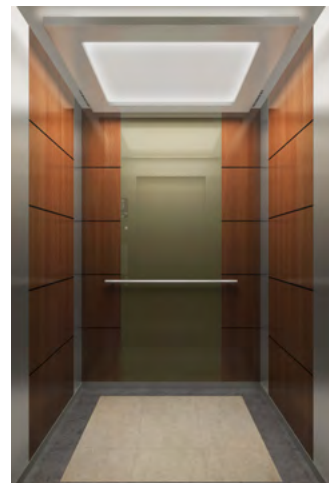

REFERENCE PROJECTS



1



2



3



4



5



6

- 1 Sunrise Kempinski Hotel, Beijing, China
- 2 Shenzhen Hilton Hotel, Shenzhen, China
- 3 Anhui Medical University First Affiliated Hospital, Hefei, China
- 4 Hangzhou Metro Line 4, Hangzhou, China
- 5 Times Square, Mumbai, Maharashtra, India
- 6 City International Hospital, Ho Chi Minh City, Vietnam

YOUR INNOVATION PARTNER

elevators and escalators in service

1,200,000

countries serviced

100+

employees

50,000+

service available for customers

24/7

locations

1,000+

service technicians

24,000+



WWW.TKELEVATOR.COM

enta300 (EN CODE)



FUNCTION LIST (MACHINEROOM-LESS)

CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Enhanced Car Functions	1	Door reopen by following landing call at same landing	S
	2	Collective selective control	S
	3	Destination selection control	O
	4	Full-load non-stop	S
	5	Onward travel to the next stop in the case of a non-opening door	S
	6	Anti-nuisance "limit number of car call when empty load"	S
	7	Anti-nuisance "car call cancellation at terminal landing"	S
	8	Anti-nuisance "car call deletion opposite to travel direction"	S
	9	Adjustable waiting time for opening door at the main landing	S
	10	Adjustable speed and torque of door operator	S
	11	Re-leveling	S
	12	Energy saving operation for car light and fan	S
	13	Elevator start-up loading weighting compensation function	S
	14	In advance door open	O
	15	Changing fire landing	O
	16	Changing parking landing	O
	17	Changing main landing	O
	18	Main landing return	O
	19	Lower noise contactor	O
	20	Adjustable waiting time for opening door at the specific landing	O
	21	Door nudging	O
	22	Regenerative power function	O
Safety and Emergency Functions	23	Landing to the nearest floor in case of problem (eg. motor overtemperature, car position missing)	S
	24	Fire emergency return (FER)	S
	25	Alarm & intercom function	S
	26	Emergency car lighting	S
	27	Overload protect	S
	28	Repeat door closing in the event of lock failure	S
	29	Door overload protect	S
	30	Safety curtain for door	S
	31	3D light curtain	O
	32	Parking (by key switch)	S
	33	Phase failure and phase reversal protection	S
	34	Lockable main switch integrated for controller cabinet	S
	35	Emergency electrical operation	S
	36	Inspection operation (on car top)	S
	37	Inspection operation (in pit)	S
	38	Traction machine over temperature supervision	S
	39	Traction machine skidding protection	S
	40	Prepared fire emergency return signal	S
	41	Unintended car movement protection	S
	42	Restrict the opening of the car door inside the car	S
	43	Brake torque detection function	S
	44	Door lock safety device failure detection	S
	45	Emergency operation for electrical brake release	S
	46	Main COP attendance	O
	47	Fireman service	O

enta300 (EN CODE)



FUNCTION LIST (MACHINEROOM-LESS)


CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Safety and Emergency Functions	48	Door lock bypass function	S
	49	Automatic rescue operation	O
	50	Earthquake function (sensors by customer)	O
	51	Earthquake function (including sensors)	O
	52	Emergency power opeation (generated by customer)	O
	53	Top of car emergency exit	S
	54	Residual current devices function (RCD function)	S
	55	Alarm while emergency trap door open function	O
	56	Building swing control operation (switch by customer)	O
	57	Pit water level detection function (switch by customer)	O
Trip Functions	58	Pit water level detection function (including switch)	O
	59	Non-door zone landing alarm function	O
	60	Allow fire sprinkler signals to be reserved	O
	61	Automatic doors	S
	62	Collective fault signal	S
	63	Collective fault signal output	O
	64	Operation counter (trip and hour)	S
	65	Car priority	O
	66	Selective door (only in through car and second COP case)	O
	67	Fire detector operation (fire alarm sensor by others)	O
Human Machine Interface	68	Special trip (landing priority) by key switch	O
	69	Blocking of landings (switch/timer)	O
	70	Constrainedly landing	O
	71	Car reader operate car call (instead of push button)	O
	72	Door close button	S
	73	Door open button	S
	74	Car call cancellation (by double press)	S
	75	Landing indicator of LED (white)	S
	76	Car indicator of LED (white)	S
	77	Landing indicator of 4.3" black-white segment LCD	O
Human Machine Interface	78	Car indicator of 5.7" black-white segment LCD	O
	79	Car indicator of 7.6" black-white segment LCD	O
	80	Car indicator of TFT LCD	O
	81	Landing indicator of TFT LCD	O
	82	Car arrival gong	O
	83	Landing arrival gong	O
	84	Speech synthesis service	O
	85	Second COP (excluding car attendant and intercom)	O
	86	COP for disabled persons (no indicator, braille, push button as standard)	O
	87	Third-party landing call	O
	88	LIOP for disabled persons	O
	89	Hall lantern	O
	90	Door keeping open button	O
	91	Landing icons display	S
	92	Call button jammed detection	O

FUNCTION LIST (MACHINEROOM-LESS)

CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Human Machine Interface	93	Car icons display	S
	94	Visitor function	O
	95	Dynamic fire function	O
Monitoring and Tele-Service	96	Intercom system	S
	97	Travelling cable (including video transmission function)	O
	98	BAS interface function (dry contactor signal)	O
	99	Supervision panel (cable by other, cable length ≤150m)	O
	100	Build automation interfacing (RS232, MM-B/C board)	O
	101	Build automation interfacing (RS485, MM-B/C board)	O
Group/Duplex Control	102	Lift monitoring system (excluding computer & printer)	O
	103	Group control (max. 8 units)	O
	104	Continued group/duplex operation in case of failure of the other elevator	O
	105	Peak service function (only for group control)	O
	106	Taking units out of group (timer/switch)	O

* S - Standard; O - Option

LAYOUT (MACHINEROOM-LESS)

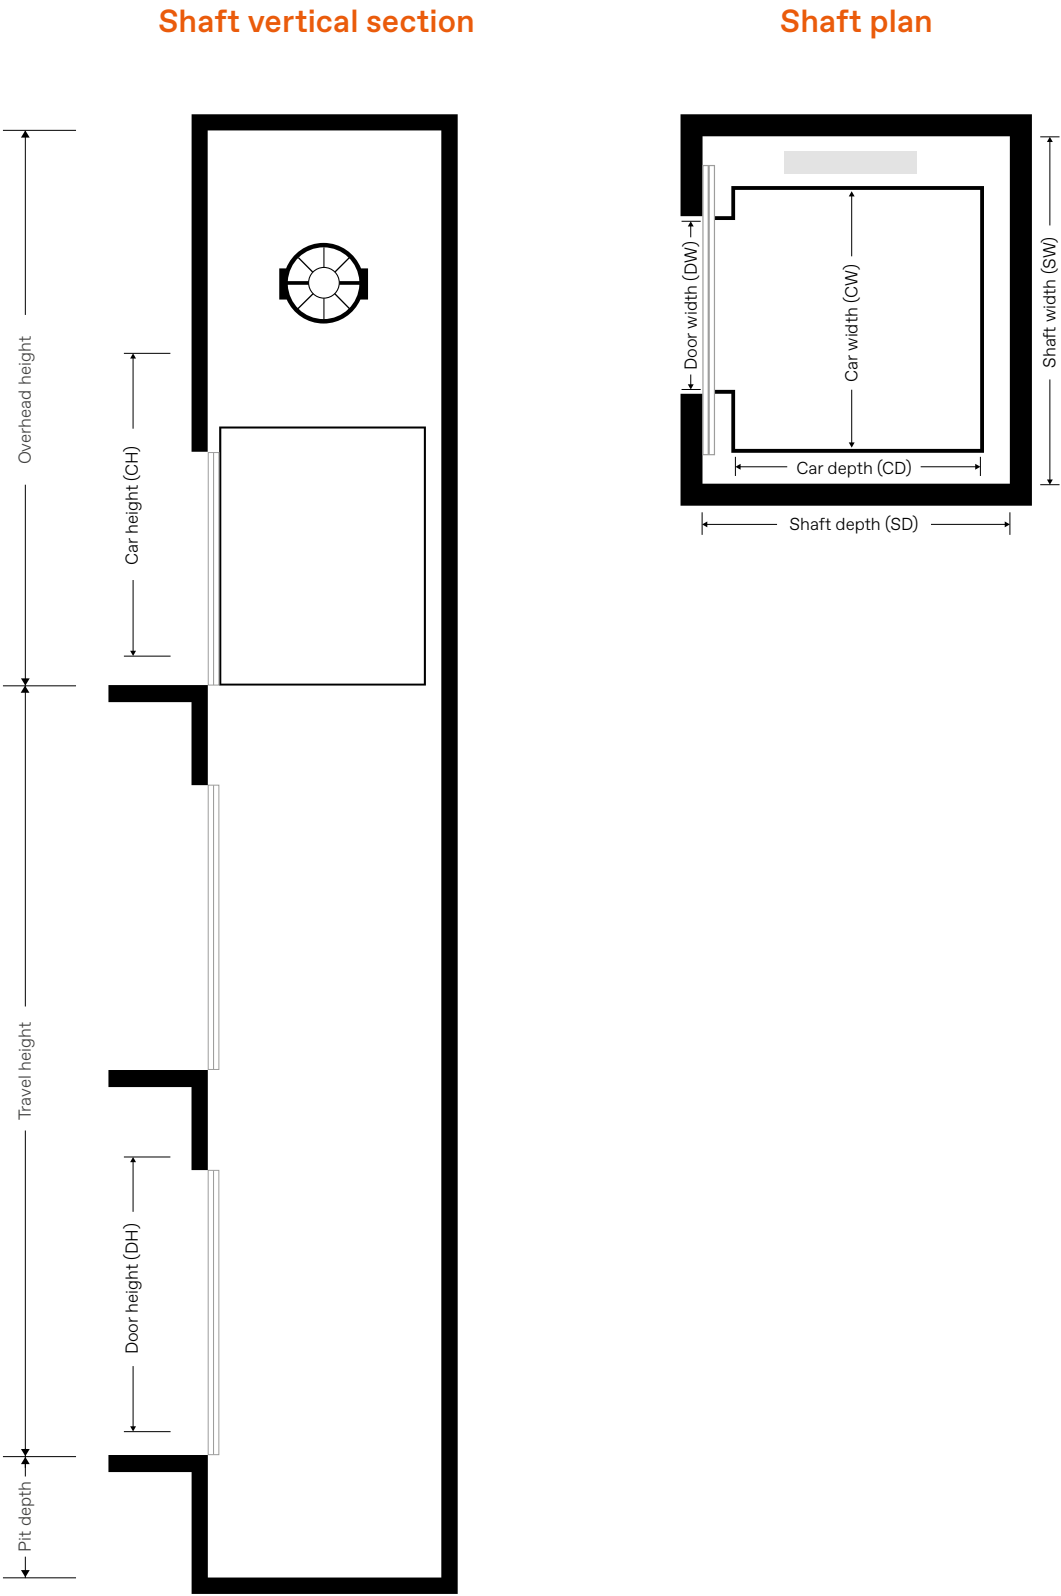

enta300 (EN CODE)

TECHNICAL SPECIFICATIONS (MACHINEROOM-LESS)

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS	DOOR SIZE (DW × DH) (MM)	CAR SIZE (CW × CD × CH) (MM)	SHAFT SIZE (SW × SD) (MM)
630	1.0	50	18	800 × 2100	1100 × 1400 × 2400 (CO)	1750 × 1800
	1.6	75	26			
	1.75	90	31			
800	1.0	50	18	800 × 2100	1350 × 1400 × 2400 (CO)	1950 × 1800
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1000	1.0	50	18	900 × 2100	1600 × 1400 × 2400 (CO) 1600 × 1500 × 2400 (CO)	2200 × 1800 2200 × 1900
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1150	1.0	50	18	1100 × 2100	1800 × 1400 × 2400 (CO)	2400 × 1800
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1250	1.0	55	20	1100 × 2100	1450 × 2000 × 2400 (CO)	2400 × 2350
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1350	1.0	55	20	1100 × 2100	1550 × 2000 × 2400 (CO)	2450 × 2350
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1600	1.0	55	20	1100 × 2100	1750 × 2000 × 2400 (CO)	2550 × 2350
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1800	1.0	50	17	1100 × 2100	2000 × 1850 × 2400 (CO)	2800 × 2400
	1.6	80	26			
	1.75	90	31			
	2.0	110	32			
2000	1.0	50	17	1100 × 2100	2000 × 2000 × 2400 (CO)	2800 × 2450
	1.6	80	26			
	1.75	90	31			
	2.0	110	32			
2500	1.0	50	17	1800 × 2100	2000 × 2400 × 2400 (CO)	3050 × 2850
	1.6	75	26			
	1.75	75	26			

CO - Centre Opening

MIN. OVERHEAD HEIGHT & MIN. PIT DEPTH

RATED SPEED (M/S)	MIN. OVERHEAD HEIGHT (MM)						MIN. PIT DEPTH (MM)						
	630KG	800-1150KG	1250-1600KG	1800KG	2000KG	2500KG	630KG	800KG	1000-1150KG	1250-1600KG	1800KG	2000KG	2500KG
1.0	4150	4150	4200	4350	4350	4800	1800	1800	1300	1320	1800	1850	1900
1.6	4300	4300	4350	4450	4450	4900	1900	1900	1450	1500	1850	1900	1950
1.75	4350	4350	4450	4500	4500	5000	1950	1950	1500	1550	1900	1950	2000
2.0	/	4450	4500	4600	4600	/	/	2050	1550	1680	1950	2000	/

* For specification over the above scope, please contact the local TK Elevator representative.



FUNCTION LIST (MACHINEROOM-LESS)

CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Enhanced Car Functions	1	Door reopen by following landing call at same landing	S
	2	Collective selective control	S
	3	Destination selection control	O
	4	Full-load non-stop	S
	5	Onward travel to the next stop in the case of a non-opening door	S
	6	Anti-nuisance "limit number of car call when empty load"	S
	7	Anti-nuisance "car call cancellation at terminal landing"	S
	8	Anti-nuisance "car call deletion opposite to travel direction"	S
	9	Adjustable waiting time for opening door at the main landing	S
	10	Adjustable speed and torque of door operator	S
	11	Re-leveling	S
	12	Energy saving operation for car light and fan	S
	13	Elevator start-up loading weighting compensation function	S
	14	In advance door open	O
	15	Changing fire landing	O
	16	Changing parking landing	O
	17	Changing main landing	O
	18	Main landing return	O
	19	Lower noise contactor	O
	20	Adjustable waiting time for opening door at the specific landing	O
	21	Door nudging	O
	22	Regenerative power function	O
Safety and Emergency Functions	23	Landing to the nearest floor in case of problem (eg. motor overtemperature, car position missing)	S
	24	Fire emergency return (FER)	S
	25	Alarm & intercom function	S
	26	Emergency car lighting	S
	27	Overload protect	S
	28	Repeat door closing in the event of lock failure	S
	29	Door overload protect	S
	30	Safety curtain for door	S
	31	3D light curtain	O
	32	Parking (by key switch)	S
	33	Phase failure and phase reversal protection	S
	34	Lockable main switch integrated for controller cabinet	S
	35	Emergency electrical operation	S
	36	Inspection operation (on car top)	S
	37	Traction machine over temperature supervision	S
	38	Traction machine skidding protection	S
	39	Prepared fire emergency return signal	S
	40	Unintended car movement protection	S
	41	Restrict the opening of the car door inside the car	S
	42	Brake torque detection function	S
	43	Door lock safety device failure detection	S
	44	Emergency operation for electrical brake release	S
	45	Main COP attendance	O



FUNCTION LIST (MACHINEROOM-LESS)

CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Safety and Emergency Functions	46	Fireman service	O
	47	Door lock bypass function	S
	48	Automatic rescue operation	O
	49	Earthquake function (sensors by customer)	O
	50	Emergency power opeation (generated by customer)	O
	51	Top of car emergency exit	O
Trip Functions	52	Residual current devices function (RCD function)	S
	53	Automatic doors	S
	54	Collective fault signal	S
	55	Collective fault signal output	O
	56	Operation counter (trip and hour)	S
	57	Car priority	O
	58	Fire detector operation (fire alarm sensor by others)	O
	59	Special trip (landing priority) by key switch	O
	60	Blocking of landings (switch/timer)	O
	61	Car reader operate car call (instead of push button)	O
Human Machine Interface	62	Door close button	S
	63	Door open button	S
	64	Car call cancellation (by double press)	S
	65	Landing indicator of LED (white)	S
	66	Car indicator of LED (white)	S
	67	Landing indicator of 4.3" black-white segment LCD	O
	68	Car indicator of 5.7" black-white segment LCD	O
	69	Car indicator of 7.6" black-white segment LCD	O
	70	Car indicator of TFT LCD	O
	71	Landing indicator of TFT LCD	O
	72	Car arrival gong	O
	73	Landing arrival gong	O
	74	Voice soothing function	S
	75	Speech synthesis service	O
	76	Second COP (excluding car attendant and intercom)	O
	77	COP for disabled persons (no indicator, braille, push button as standard)	O
	78	Third-party landing call	O
	79	LIOP for disabled persons	O
	80	Hall lantern	O
	81	VIP landing operation	O
	82	Door keeping open button	O
	83	Landing icons display	S
	84	Call button jammed detection	O
	85	Car icons display	S
	86	Visitor function	O
	87	Dynamic fire function	O


FUNCTION LIST (MACHINEROOM-LESS)

CATEGORY	NO.	FUNCTION	STANDARD / OPTION
Monitoring and Tele-Service	88	Intercom system	S
	89	Intercom system (double monitoring room)	O
	90	Travelling cable (including video transmission function)	O
	91	BAS interface function (dry contactor signal)	O
	92	Color video camera (in car)	O
	93	Supervision panel (cable by other, cable length ≤150m)	O
	94	Build automation interfacing (RS232, MM-B/C board)	O
	95	Build automation interfacing (RS485, MM-B/C board)	O
Group/Duplex Control	96	Lift monitoring system (excluding computer & printer)	O
	97	Group control (max. 8 units)	O
	98	Continued group/duplex operation in case of failure of the other elevator	O
	99	Peak service function (only for group control)	O
	100	Taking units out of group (timer/switch)	O

* S - Standard; O - Option



LAYOUT (MACHINEROOM-LESS)

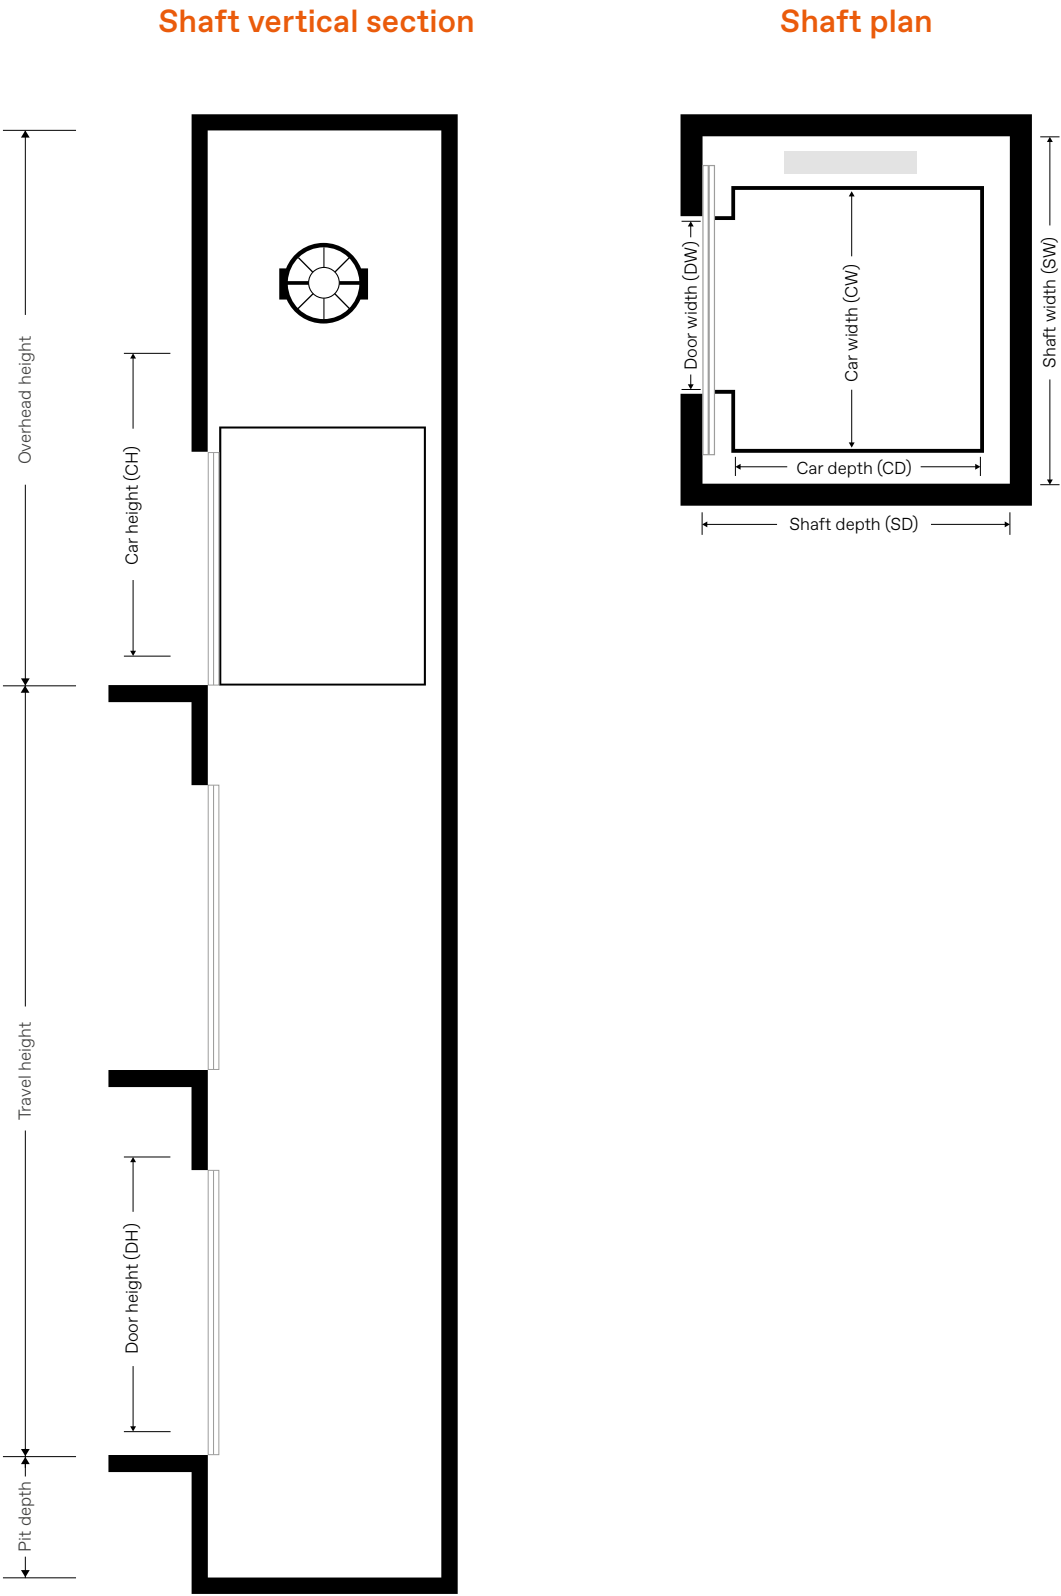

enta300 (GB CODE)

TECHNICAL SPECIFICATIONS (MACHINEROOM-LESS)

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS	DOOR SIZE (DW × DH) (MM)	CAR SIZE (CW × CD × CH) (MM)	SHAFT SIZE (SW × SD) (MM)
630	1.0	45	15	800 × 2100	1100 × 1400 × 2200 (CO)	1750 × 1750
	1.6	75	30		1100 × 1400 × 2300 (CO)	1750 × 1800
	1.75	90	35			
800	1.0	50	18	800 × 2100	1350 × 1400 × 2300 (CO)	1950 × 1800
	1.6	75	30			
	1.75	90	35			
	2.0	110	38			
1000	1.0	50	18	900 × 2100	1600 × 1400 × 2300 (CO) 1600 × 1500 × 2300 (CO)	2200 × 1800 2200 × 1900
	1.6	75	30			
	1.75	90	35			
	2.0	110	38			
1150	1.0	50	18	1100 × 2100	1800 × 1400 × 2300 (CO)	2400 × 1800
	1.6	75	30			
	1.75	90	35			
	2.0	110	38			
1250	1.0	55	20	1100 × 2100	2000 × 1450 × 2400 (CO)	2750 × 1875
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1350	1.0	55	20	1100 × 2100	2000 × 1550 × 2400 (CO)	2750 × 1925
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1600	1.0	55	20	1100 × 2100	2000 × 1750 × 2400 (CO)	2750 × 2125
	1.6	90	35			
	1.75	100	38			
	2.0	120	40			
1800	1.0	50	17	1100 × 2100	2000 × 1850 × 2400 (CO)	2800 × 2400
	1.6	80	26			
	1.75	90	31			
	2.0	110	32			
2000	1.0	50	17	1100 × 2100	2000 × 2000 × 2400 (CO)	2800 × 2450
	1.6	80	26			
	1.75	90	31			
	2.0	110	32			
2500	1.0	50	17	1800 × 2100	2000 × 2400 × 2400 (CO)	3050 × 2850
	1.6	75	26			
	1.75	75	26			

CO - Centre Opening

MIN. OVERHEAD HEIGHT & MIN. PIT DEPTH

RATED SPEED (M/S)	MIN. OVERHEAD HEIGHT (MM)						MIN. PIT DEPTH (MM)					
	630KG	800-1150KG	1250-1600KG	1800KG	2000KG	2500KG	630KG	800-1150KG	1250-1600KG	1800KG	2000KG	2500KG
1.0	3500	3650	4050	4350	4350	4800	1200	1200	1320	1800	1850	1900
1.6	3850	3850	4250	4450	4450	4900	1400	1400	1500	1850	1900	1950
1.75	3900	3900	4300	4500	4500	5000	1450	1450	1550	1900	1950	2000
2.0	/	4050	4450	4600	4600	/	/	1550	1680	1950	2000	/

* For specification over the above scope, please contact the local TK Elevator representative.