


## ABS-132GGS-G12 705W – 725W Topcon Half Cut PV Module Glass/Glass-Silver Frame

**725W** MAXIMUM POWER OUTPUT

**+10W** OUTPUT POSITIVE TOLERANCE  
Guaranteed 0~+10W positive tolerance ensures power output reliability.

**23.3%** MAXIMUM EFFICIENCY

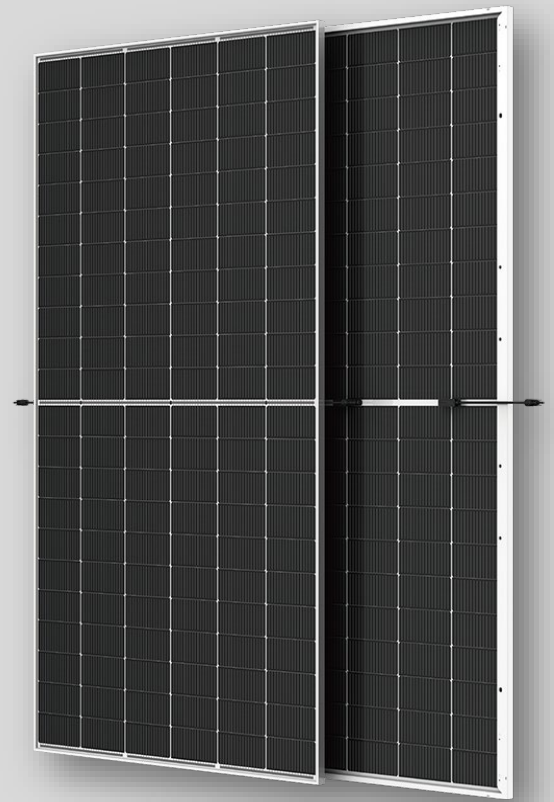

## KEY FEATURES



### LOW SYSTEM COST

Higher yield per surface area, lower BOS costs, higher power classes, and an efficiency rate of up to 23.34%.



### EXTREME WEATHER RATING

High-tech aluminum alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa).



### ADVANCED MODULE TECHNOLOGY

Highest reliability & enhanced crack tolerance MBB module



### ALL-WEATHER TECHNOLOGY Optimal

Yields, whatever the weather, with low-light and temperature behaviour.



### BETTER TEMPERATURE COEFFICIENT


Lower temperature coefficient (Pmax):  
-0.30%/°C, increases energy yield in hot climate



### ENDURING HIGH PERFORMANCE

Anti LID and Anti PID Technology. Under long-term production safety conditions, the limited power degradation caused by the PID effect is guaranteed.

## LINEAR PERFORMANCE WARRANTY

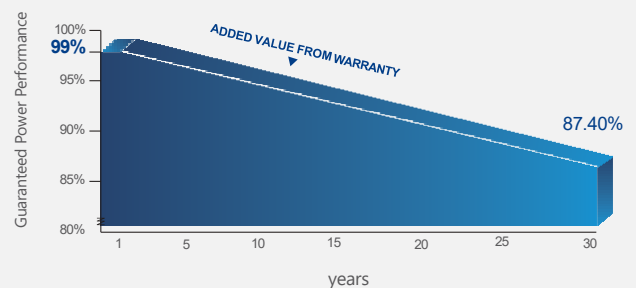

30-year Warranty for Extra Linear Power Output



12-year Warranty for Materials and Processing  
(1<sup>st</sup> year ≤ 1.0%, 2<sup>nd</sup>~30<sup>th</sup> years ≤ 0.40% / year)

## THE IDEAL SOLUTION FOR



Residential



Commercial



Off-Grid



Utility

## COMPREHENSIVE CERTIFICATES

IEC 61215 | IEC 61730 | IEC 61701 | IEC 62716



UL 1709 | CEC | ISO 9001 | ISO 14001 | ISO 45001

## ADVANTAGES



**MADE IN UAE**  
Premium products are 100% made in the Emirates.



**A RELIABLE INVESTMENT**  
Products up to 725Wp, 30 years of performance warranty.



**ENCOURAGING INNOVATION**  
Innovative, prestigious, European production technology

# ABS-132GGS-G12-705-725W

## ENGINEERING DRAWINGS & TECHNICAL PARAMETERS



### ELECTRICAL CHARACTERISTICS (STC/NOCT)

Models	Maximum Rating Power (Pmax) (W)		Open Circuit Voltage (Voc) (V)		Maximum Power Voltage (Vmp) (V)		Short Circuit Current (Isc) (A)		Maximum Power Current (Imp) (A)		Module Efficiency (EFF)(%)
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
ABS-132GGS-G12-705	705	527.0	47.06	44.25	40.57	37.85	18.10	14.61	17.43	13.96	22.70%
ABS-132GGS-G12-710	710	530.7	47.17	44.35	40.66	37.94	18.14	14.64	17.54	14.05	22.86%
ABS-132GGS-G12-715	715	534.4	47.22	44.40	40.71	37.98	18.17	14.66	17.59	14.09	23.02%
ABS-132GGS-G12-720	720	538.2	47.34	44.51	40.81	38.08	18.21	14.69	17.69	14.17	23.18%
ABS-132GGS-G12-725	725	541.9	47.44	44.60	40.90	38.16	18.23	14.71	17.79	14.25	23.34%

\*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m<sup>2</sup>, AM 1.5, Nominal module operating temperature (NMOT): Air mass AM 1.5, Irradiance 800W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s. Reduction in efficiency from 1000W/m<sup>2</sup> to 200W/m<sup>2</sup> at 25°C: 3.5 ± 2%  
\*Values without tolerance are typical numbers. Measurement tolerance: ± 3%''


### BI-FACIAL OUTPUT-BACKSIDE POWER GAIN

Models		ABS-132GGS-G12-705	ABS-132GGS-G12-710	ABS-132GGS-G12-715	ABS-132GGS-G12-720	ABS-132GGS-G12-725
10%	Power	776	781	787	792	798
	Eff	24.96%	25.14%	25.32%	25.50%	25.67%
15%	Power	811	817	822	828	834
	Eff	26.10%	26.28%	26.47%	26.66%	26.84%
20%	Power	846	852	858	864	870
	Eff	27.23%	27.43%	27.62%	27.81%	28.01%
25%	Power	881	888	894	900	906
	Eff	28.37%	28.57%	28.77%	28.97%	29.17%

### MECHANICAL DATA

Solar Cell	Topcon 210 x 105 mm G12, 18BB
No. of cells	132 (6x22)
Dimensions	2384 mm x 1303 mm x 30 mm (93.85" x 51.30" x 1.18" inch)
Weight	39 kg / 85.98 lbs.(±3%)
Front Glass	2.0 mm, High Transmission, Low Iron, Tempered ARC Glass
Cell Encapsulation	EPE(Expanded polyethylene) & EVA (Ethylene-Vinyl-Acetate)
Back Glass	2.0 mm Semi Tempered Glass with Glaze
Frame	Silver Anodized Aluminum Alloy Type 6005T6, Silver Color
Junction Box	IP68, 1500VDC, 3 Bypass Diodes
Connectors Type	IP68 MC4 Compatible
Cable	400mm or 1300 mm, 4mm <sup>2</sup>
Package Configuration	36 pcs Per Pallet, 648 pcs per 40' FT container (Two pallets=One stack)

### DIMENSIONS OF PV MODULE (mm)

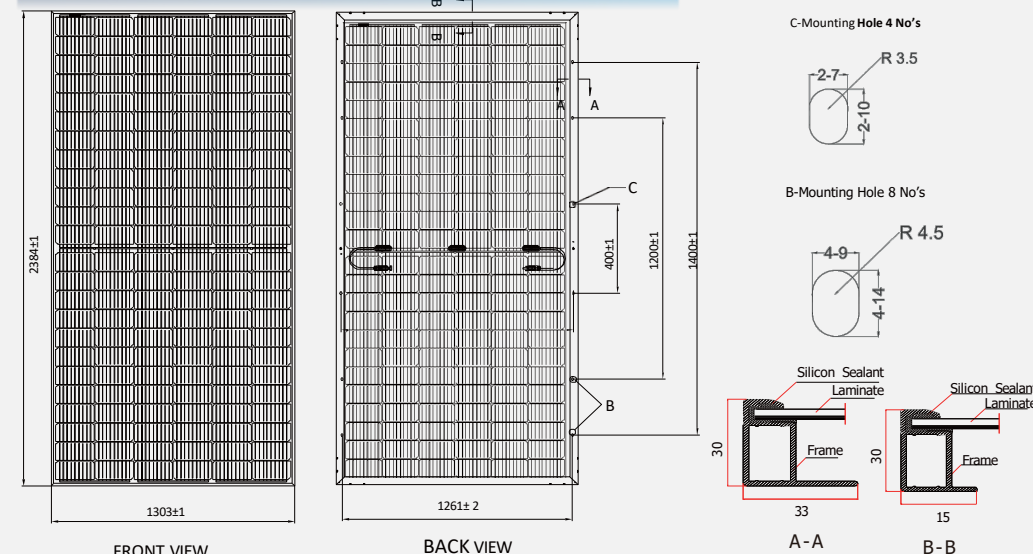

### OPERATING CONDITION


Mechanical Load	5400 Pa
Maximum System Voltage	1500VDC
Series Fuse Rating	30 A
Operating Temperature	-40 to 85 °C
Safety application class	Class II
Fire Rating	Class C

### TEMPERATURE CHARACTERISTICS


Nominal Module Operating Temperature	43°C ± 2°C
Temperature Coefficient of Isc	+0.05 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Pmax	-0.30 % / °C

### IV-CURVES

#### CURRENT-VOLTAGE CURVE UNDER DIFFERENT IRRADIANCE

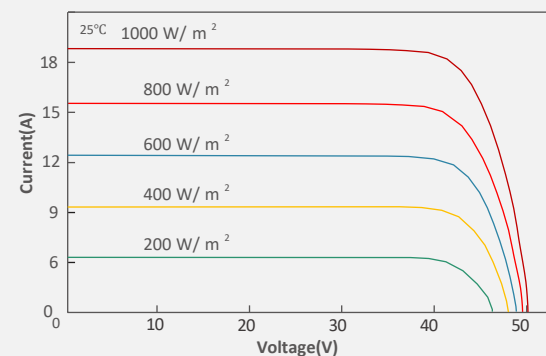

#### CURRENT-VOLTAGE CURVE UNDER DIFFERENT WORKING TEMPERATURES

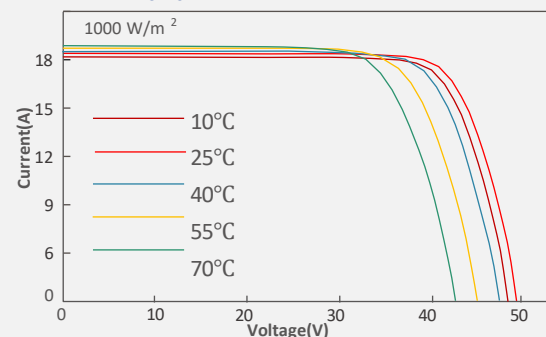

The Graphs are for reference purpose only. Please consult Abundance technical team for further clarifications.