SVCNC TECHNOLOGY

Mfg. of CNC | VMC | SPM Machine,
Retrofitting of CNC Machine, Spares & Service Providers



We Can Make,
What You Can Imagine

Shed No. 2, Atulit Industrial Area, Nr. Vikas Gruh Udhyog,
Kothariya - 360 022.

+91 90336 57851 sales@svcnc.in

www.svcnc.in


VMC 800

STRUCTURE



VMC 800

LAYOUT

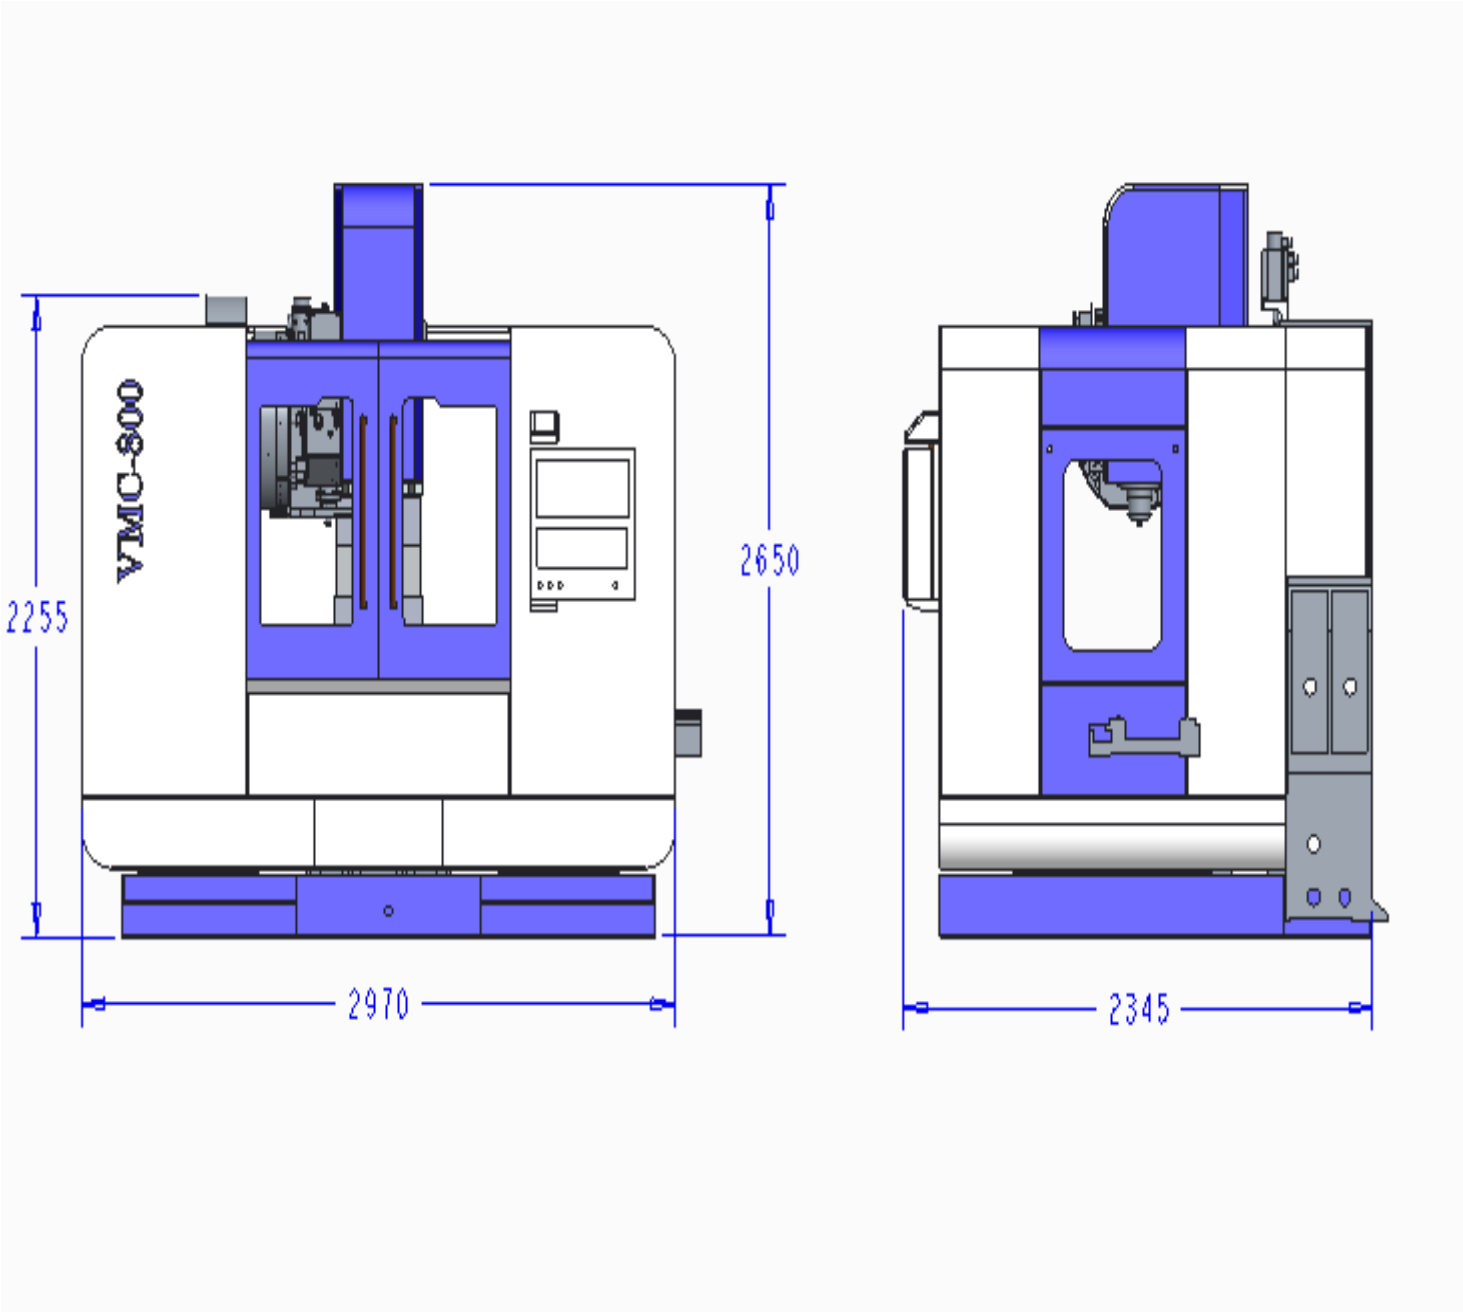

VMC 800

Description	Parameters	Specifications
Traverse	X-Axis	825 mm
	Y-Axis	500 mm
	Z-Axis	500 mm
	Table Top to Spindle Face	100 – 600 mm
Table	Table Size	600 x 1100
	Table Slots	4 / 18 /100
	Floor to Table Top	950 mm
Feed Rate	Rapid Traverse (X/Y/Z)	24 / 24 / 20 m/min
	Cutting Feed Rate	10000 mm/min

VMC 800

Description	Parameter	Specifications
Spindle	Spindle Taper	BT-40
	Maximum Speed (RPM)	8000
	Spindle Power (KW)	7.5/11
Automatic Tool Changer (ATC)	No. of Tools	20/24
	Maximum Tool Diameter	80 / 150 mm
	Maximum Tool Length	200 mm
	Maximum Tool Weight	8 kgs
Accuracy	Position Accuracy	±0.010 mm
	Repeatability	±0.003 mm
CNC CONTROL SYSTEM	FANUC / SIEMENS / MITSUBISHI	

VMC 800

KEY FEATURES

- Rigid bed having two linear guides for better stability
- Powerful high torque spindle
- High Precision Linear Guide Ways
- Highly automatic 20/24 tools ATC
- Hardened and Ground Ballscrew
- Ergonomically design concept
- Efficient chip removal without disturbing machining
- Auto and manual cooling system
- Electrical Panel with quality devices & panel with A.C.
- Centralized & programmable lubrication
- SS telescopic covers

OPTIONAL FEATURES

- Chip Conveyor
- Stabilizer
- Through Coolant Spindle
- Direct Coupled Spindle
- Rotary Table
- Manual Tailstock, Manual Chuck, Power Chuck
- Spindle with higher speeds