



Alex Sojda
Galvo Interface Block Diagram V0.1
<http://alex-sojda.org/blog>
alex.sojda@gmail.com

Interface HW-01








Interface HW-01.sch

Interface HW-02







Interface HW-02.sch


File: Interface HW.sch		
Sheet: /		
Title: Defcon Bot Interface Brd		
Size: A	Date: 2 apr 2014	Rev: 1
KiCad E.D.A.	Id: 1/3	

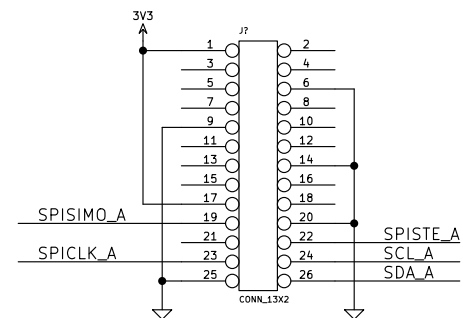

RASPBERRY PI HAS TWO SLAVE SELECT PINS, OR GATES ARE NOT NEEDED. SCL_A/SDA_A ARE SLAVE SELECT, SPISTE_A IS GPIO

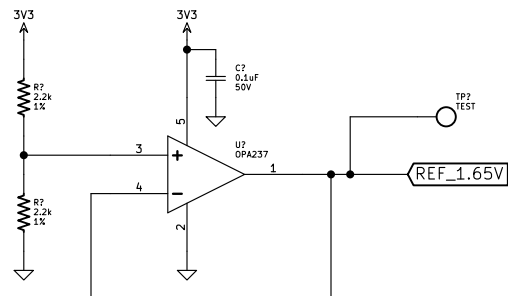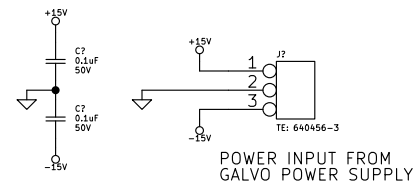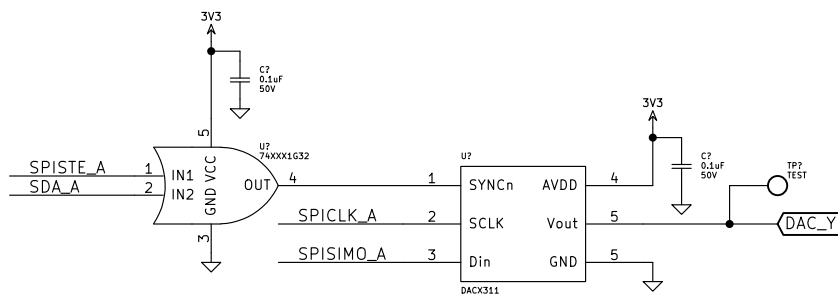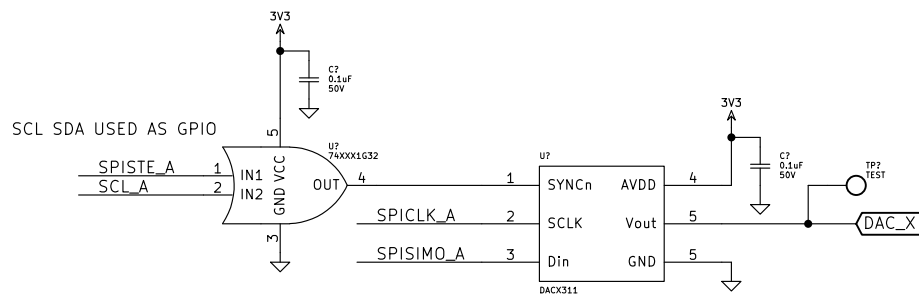

File: Interface HW-01.sch		
Sheet: /Interface HW-01/		
Title: Defcon Bot Interface Brd		
Size: A	Date: 2 apr 2014	Rev: 1
KiCad E.D.A.		Id: 2/3

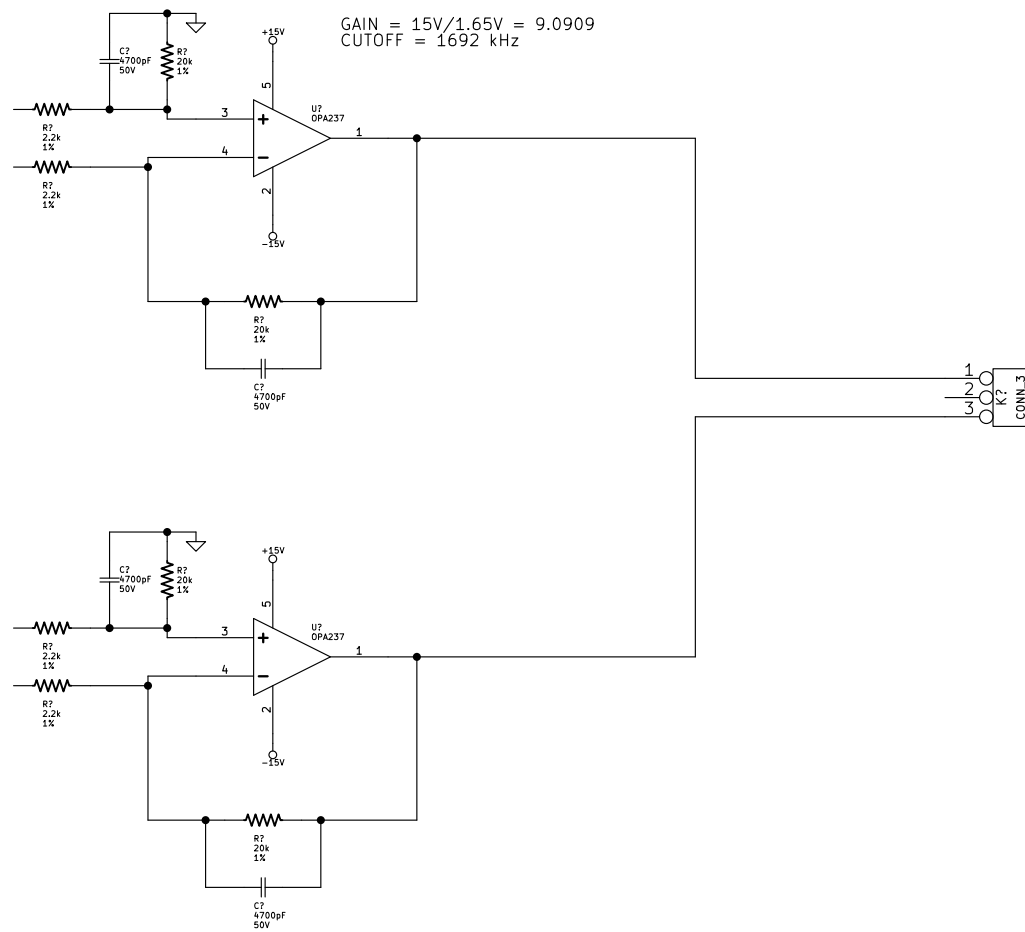

File: Interface HW-02.sch		
Sheet: /Interface HW-02/		
Title:		
Size: A4	Date: 2 apr 2014	Rev:
KiCad E.D.A.		Id: 3/3