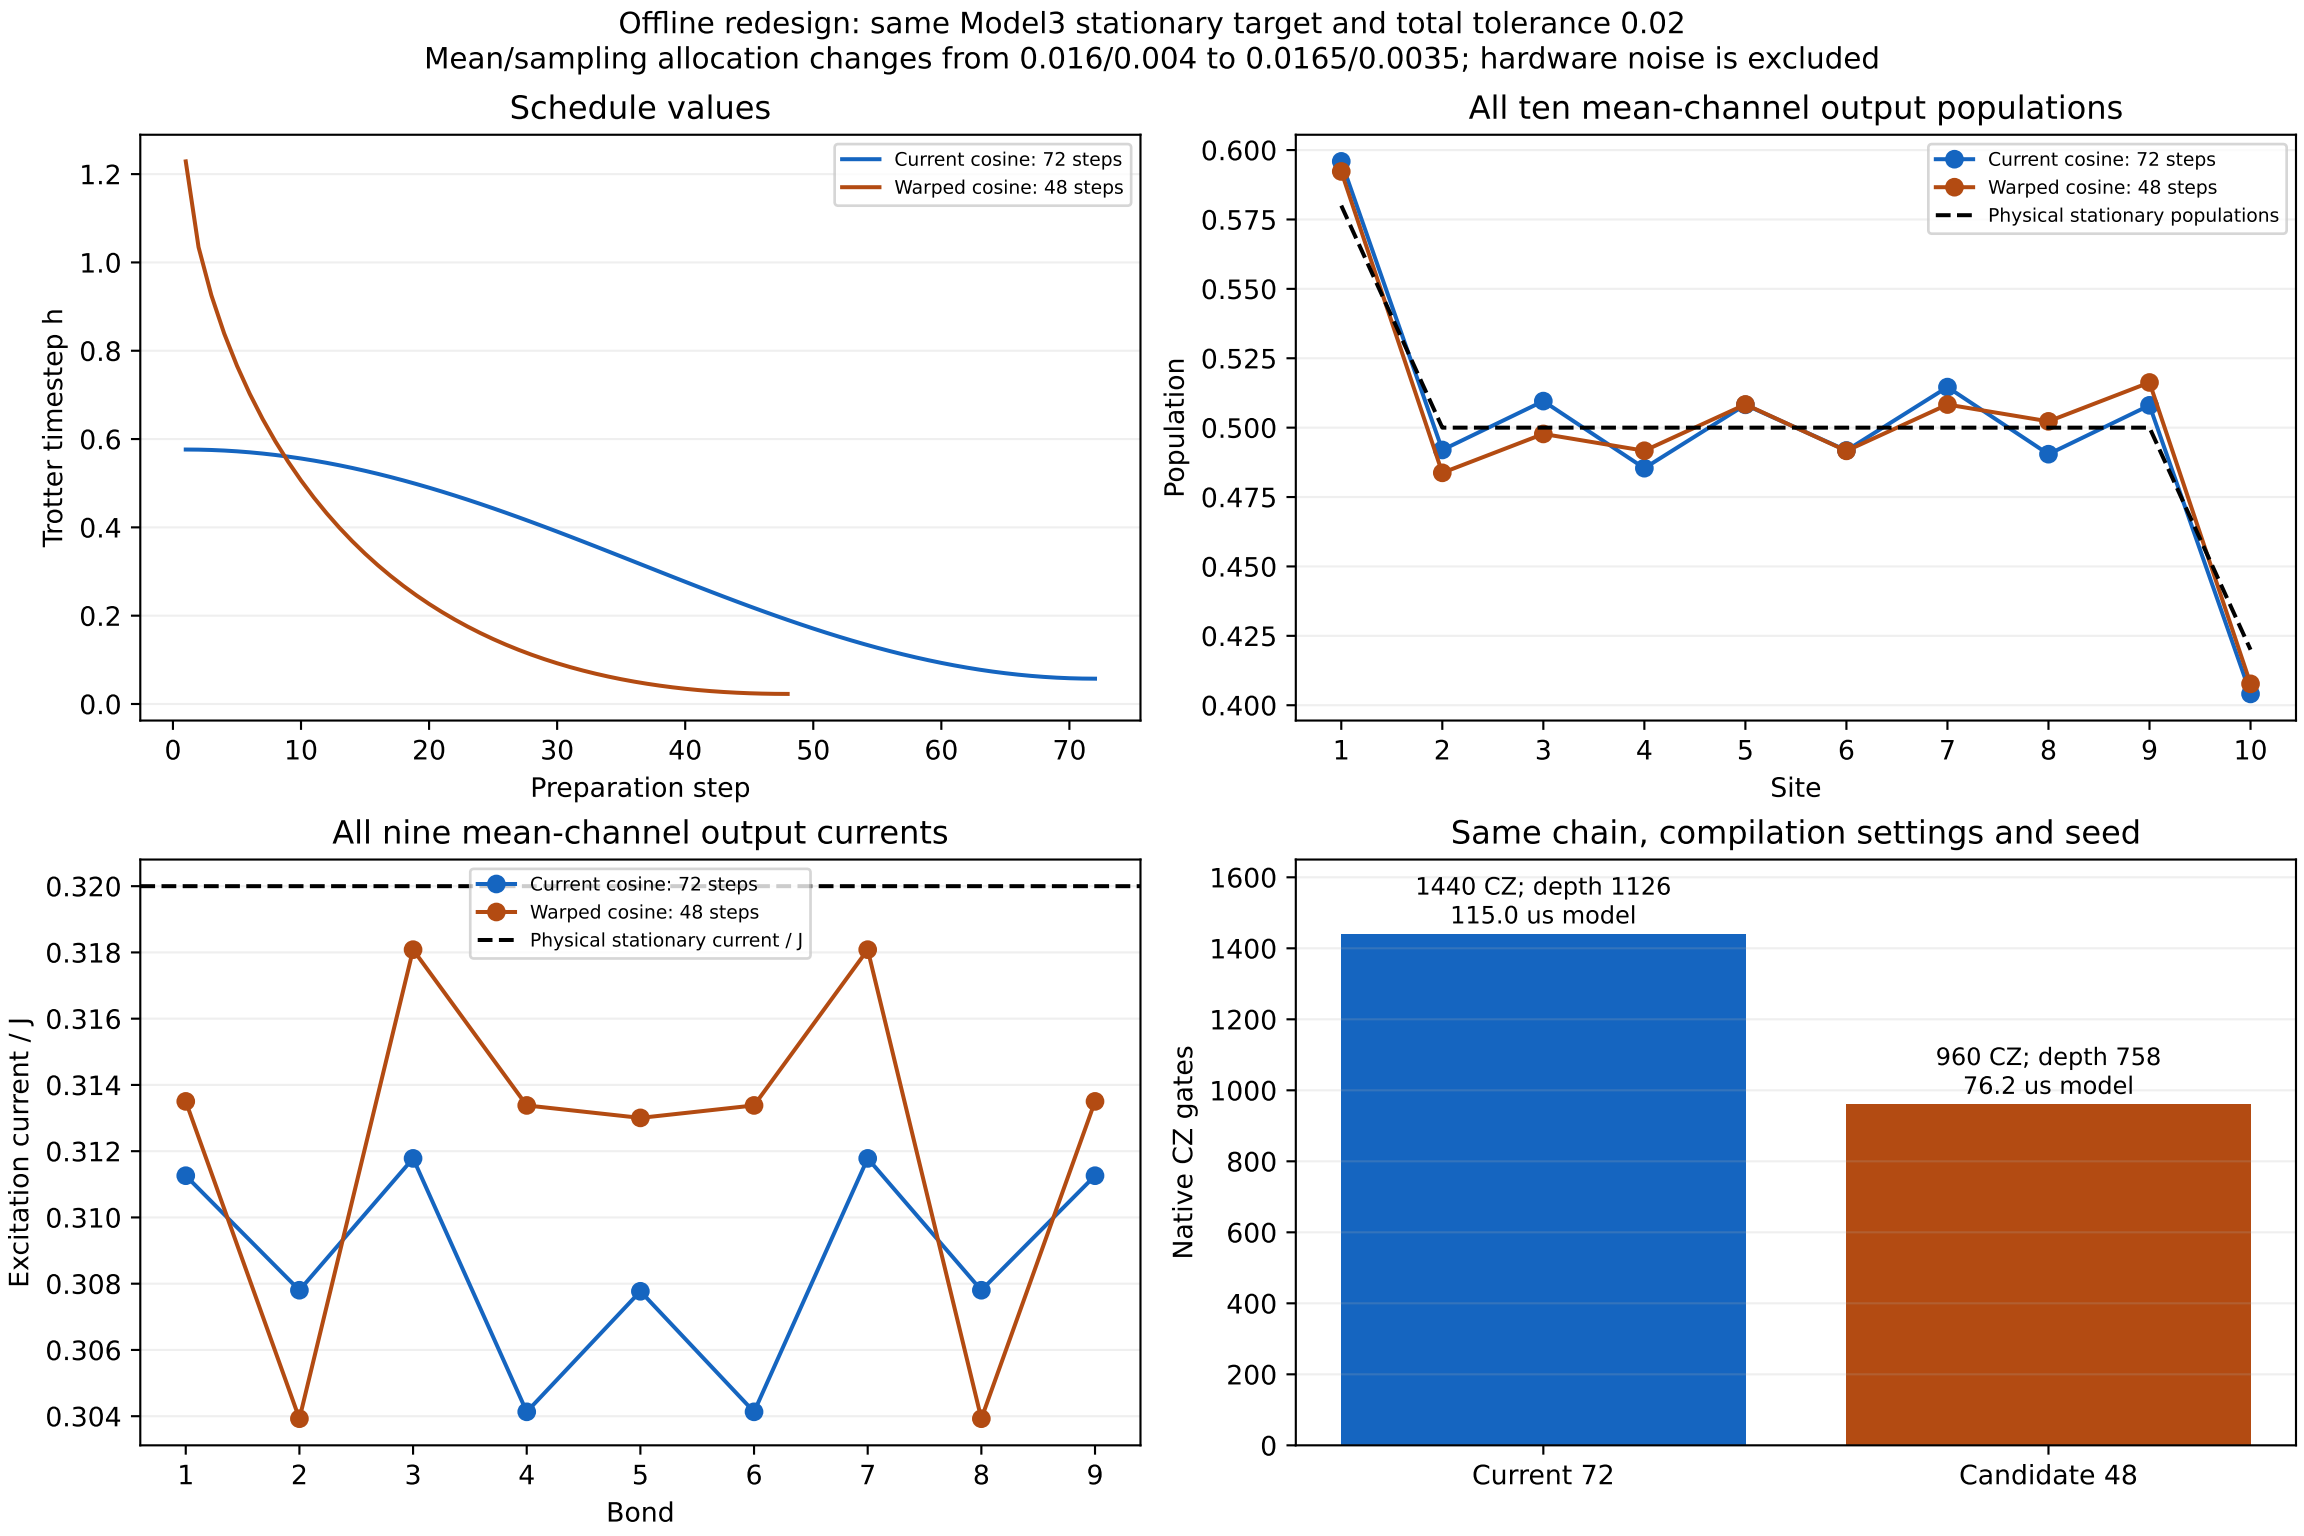
Offline redesign: same Model3 stationary target and total tolerance 0.02
Mean/sampling allocation changes from 0.016/0.004 to 0.0165/0.0035; hardware noise is excluded
Schedule values
Trotter timestep h
Preparation step
Current cosine: 72 steps
Warped cosine: 48 steps
All ten mean-channel output populations
Population
Site
Physical stationary populations
All nine mean-channel output currents
Excitation current / J
Bond
Physical stationary current / J
Same chain, compilation settings and seed
Native CZ gates
1440 CZ; depth 1126
115.0 us model
960 CZ; depth 758
76.2 us model
Current 72
Candidate 48