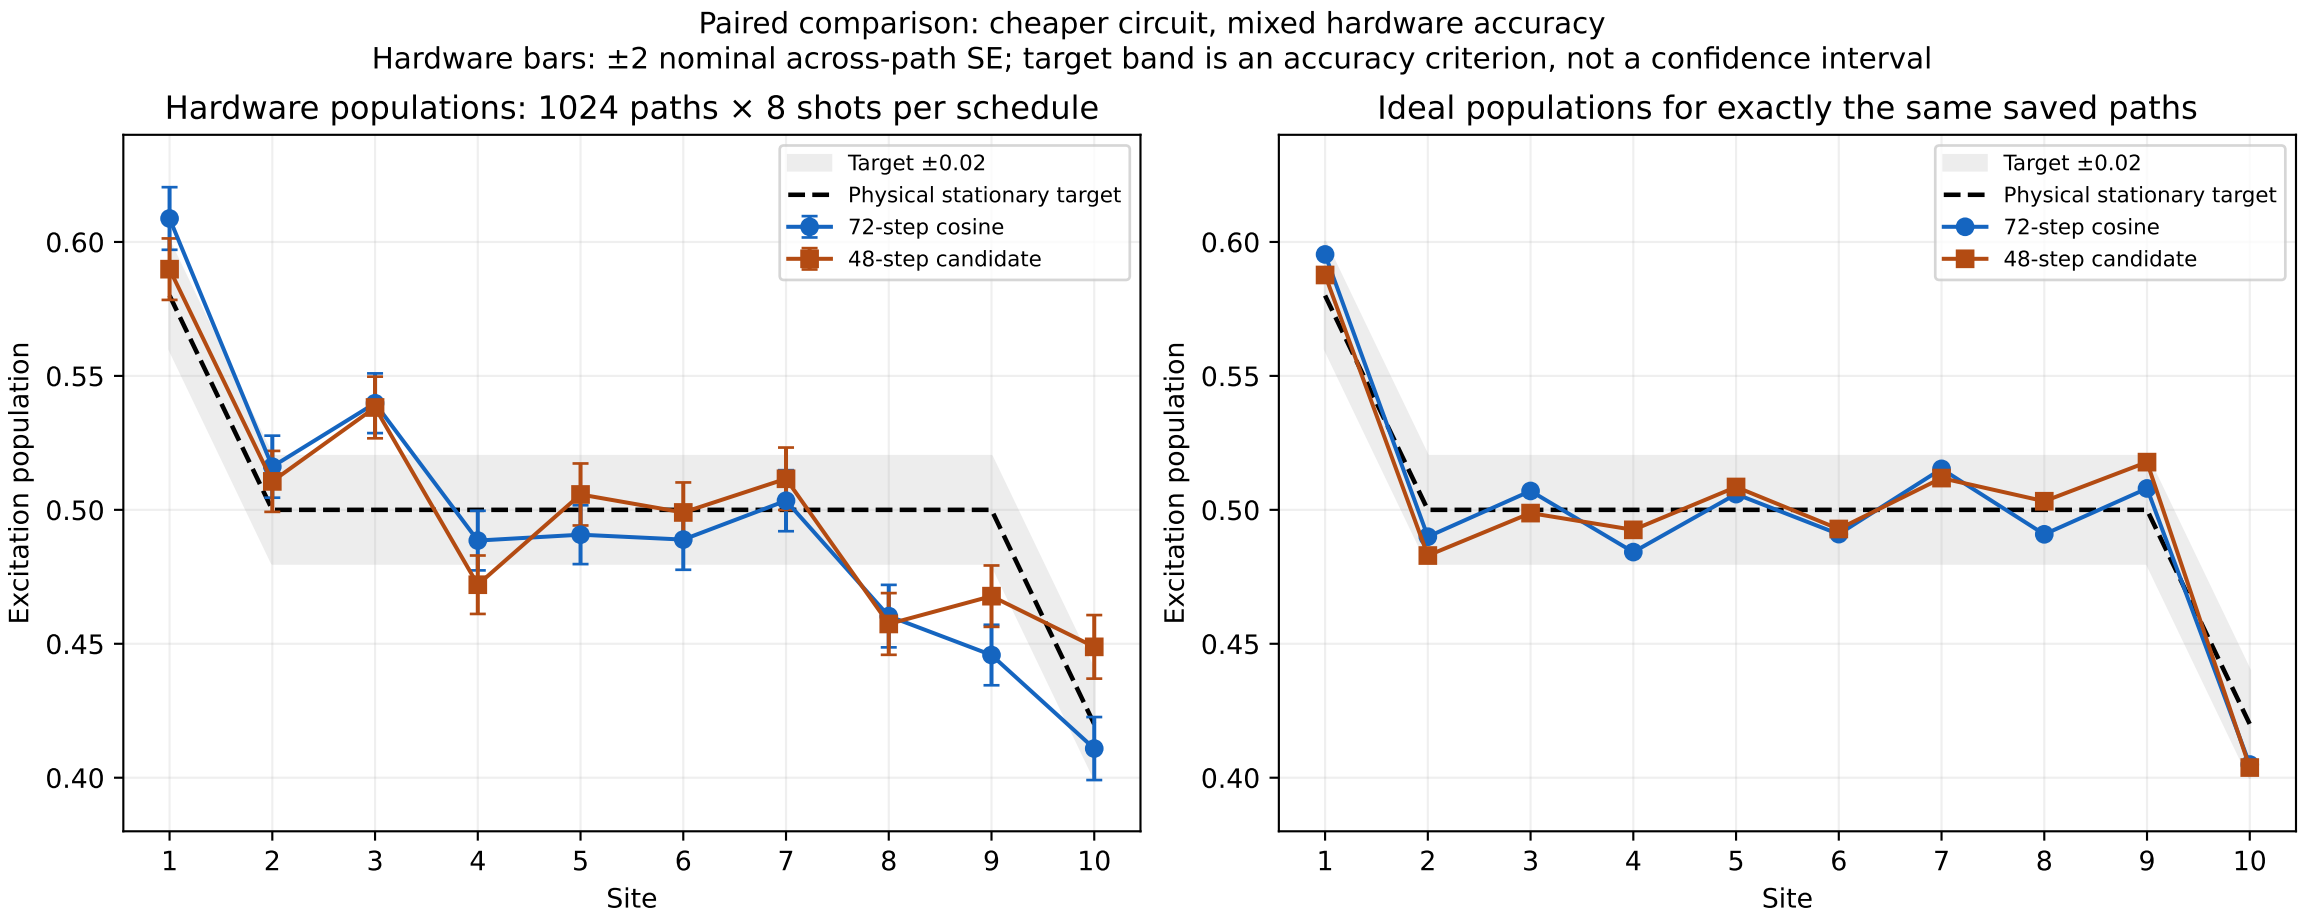
Paired comparison: cheaper circuit, mixed hardware accuracy
Hardware bars: ±2 nominal across-path SE; target band is an accuracy criterion, not a confidence interval
Hardware populations: 1024 paths × 8 shots per schedule
Ideal populations for exactly the same saved paths
Target ±0.02
Physical stationary target
72-step cosine
48-step candidate
Excitation population
0.60
0.55
0.50
0.45
0.40
1
2
3
4
5
6
7
8
9
10
Site