


1.Open Cisco Packet Tracer and create a new project file named 'HomeWiFiNetwork.pkt' with three PCs and one wireless router connected appropriately.

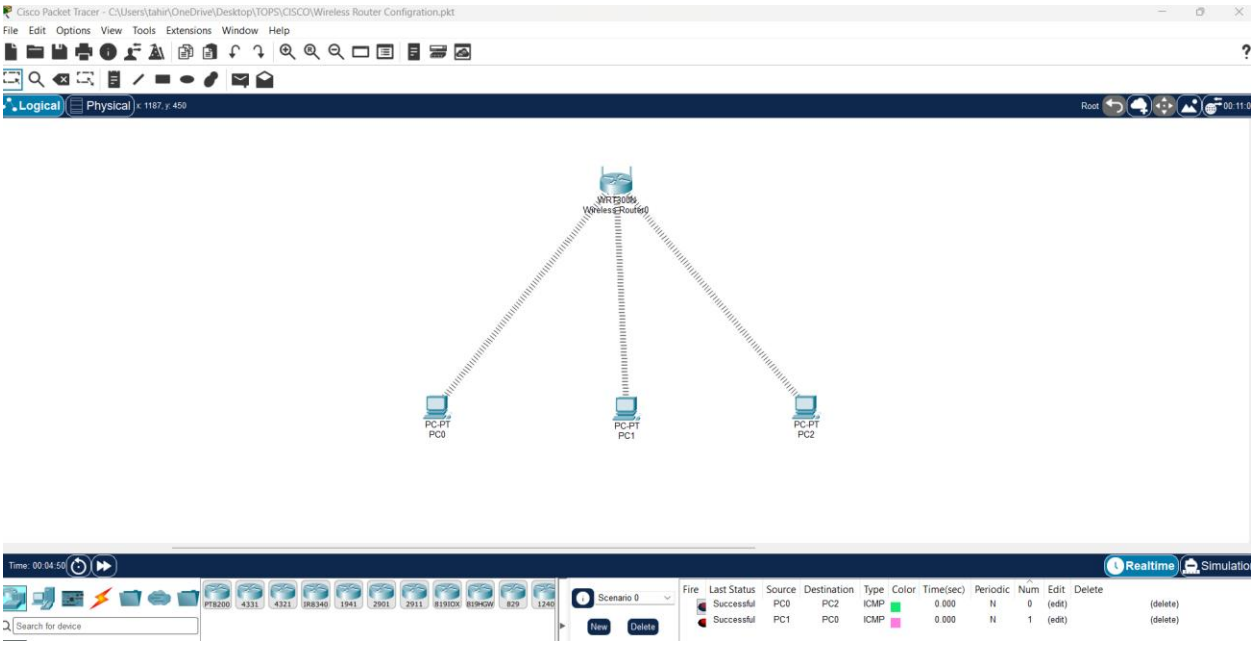

2.Assign static IP addresses to each PC in your Packet Tracer network so they are on the same subnet (e.g., 192.168.10.x), and configure the default gateway to the router's IP.

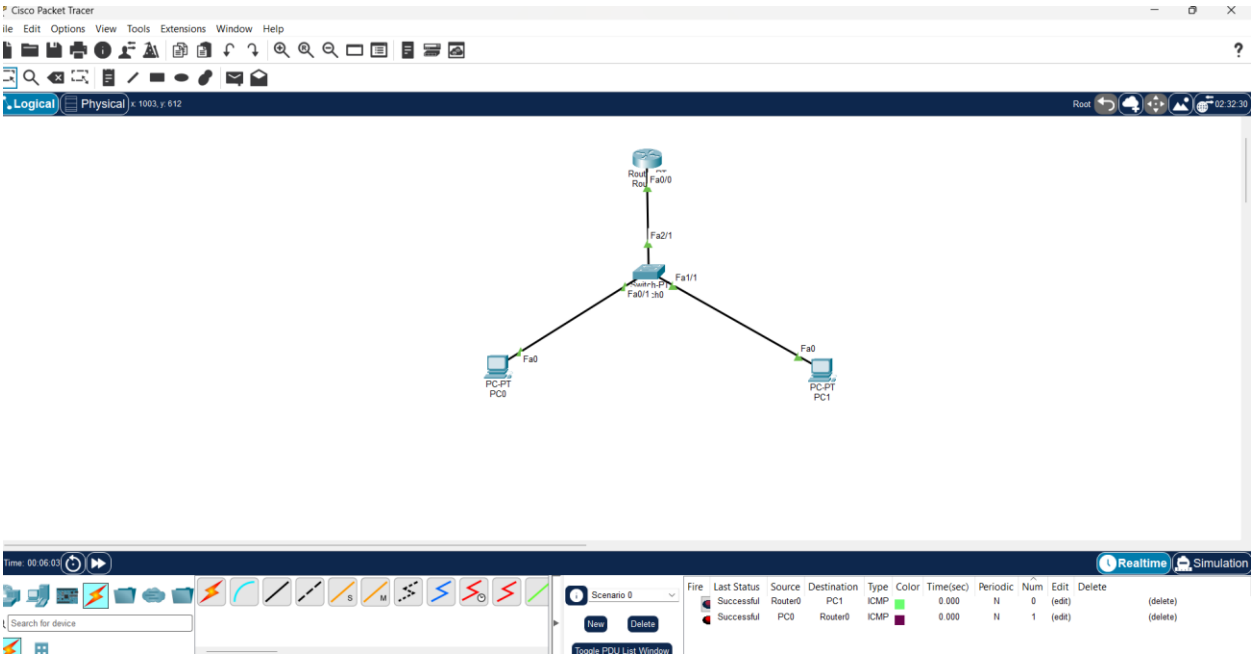


3.Test connectivity by using the Packet Tracer 'ping' tool to verify that all PCs can communicate with each other and the router.

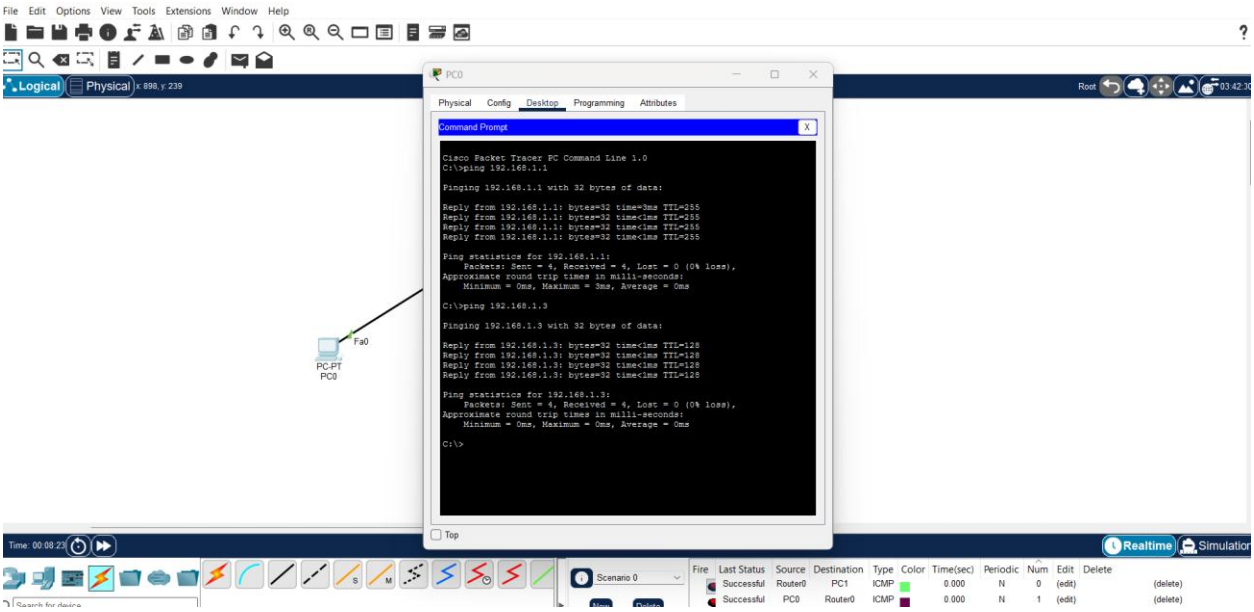

Result: Successfully tested connectivity using the ping command. All PCs can communicate with each other and the router.

4.Document each step you took to build and configure your Packet Tracer network, including screenshots of your topology and the IP configuration windows for each PC, in a Word or PDF file.

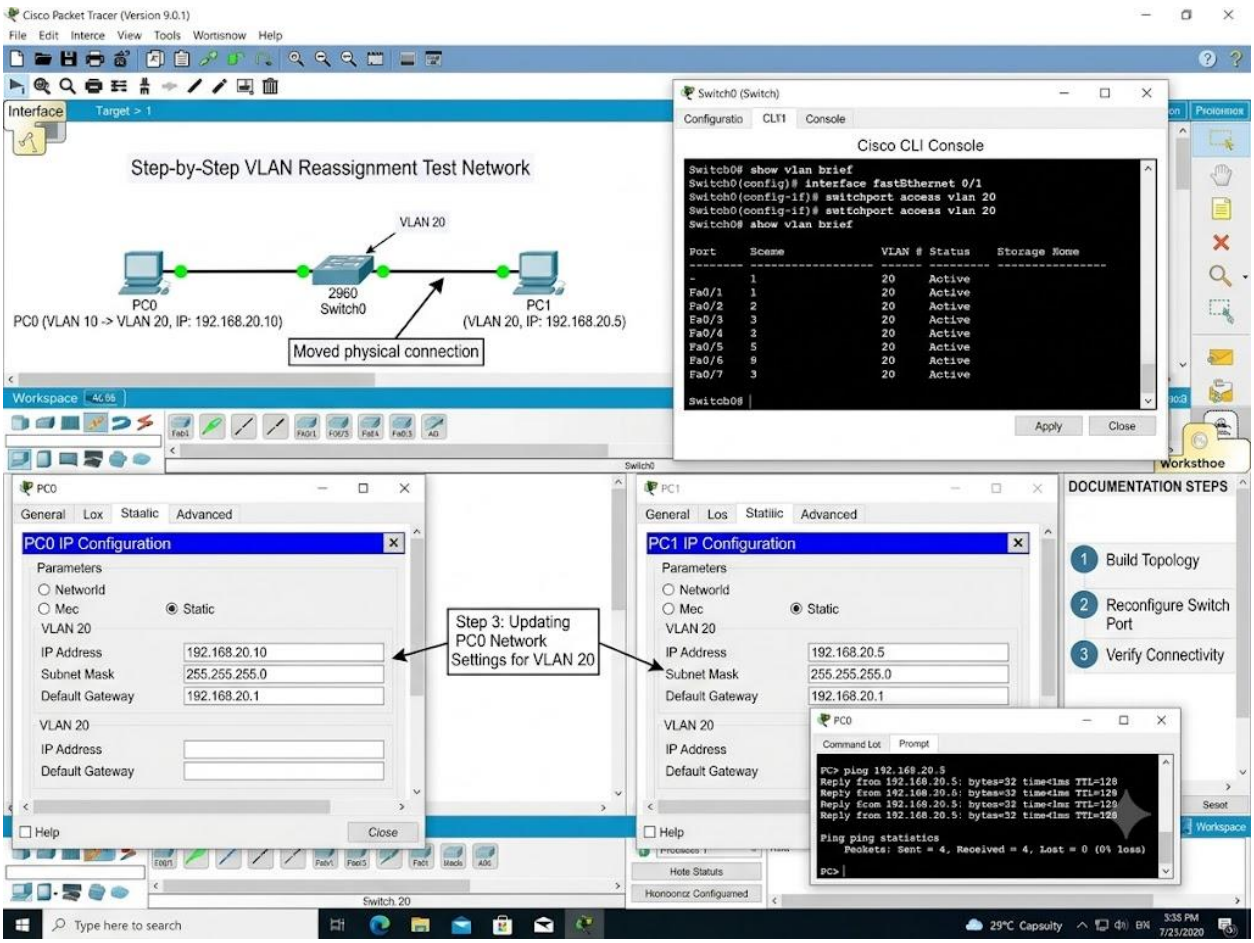

Steps to Build and Configure the Network in Cisco Packet Tracer

Step 1: Add Network Devices

I opened Cisco Packet Tracer and added PCs, switches, and routers according to my network requirements.

Step 2: Connect the Devices
I connected the PCs to the switches and connected the network devices using suitable cables.

Step 3: Configure IP Addresses
I opened each PC, selected Desktop → IP Configuration, and assigned a unique IP address, subnet mask, and default gateway.

Step 4: Configure the Network
I configured the required switch ports and VLANs, where applicable, to organize the network devices.

Step 5: Verify the Configuration
I checked the IP configuration of each PC and verified that the devices were connected correctly.

Step 6: Test Connectivity
I opened the Command Prompt on each PC and used the ping command to test communication between devices.

Step 7: Save the Network
I saved my Packet Tracer project and captured screenshots of the network topology, PC IP configurations, and connectivity test results for documentation.