

SOLARCELL



GH 36PCS POLY SERIES 1476X680X35MM

Electrical parameters

Electrical parameters at STC(1,000W/m²),25℃, AM 1.5 according to EN 60904-3

Module type	[P]	GH150P36	GH140P36	GH130P36	GH120P36
Power output	[W]	150	140	130	120
Power output tolerances	[%]	±3	±3	±3	±3
Module efficiency	[%]	15.5	15.0	14.5	14.0
Voltage at Pmax,Vmpp	[V]	18.2	18.0	17.2	17.2
Current at Pmax,Impp	[A]	8.35	7.80	7.56	7.05
Open circuit voltage Voc	[V]	22.20	22.20	22.00	21.60
Short circuit current Isc	[A]	8.85	8.67	8.50	8.40

Parameters of thermal characteristics




NOCT(Nominal Operating Cell Temperatures)	[℃]	46 ± 2
Temperature coefficient beta of Isc	[1/k]	+0.0006
Temperature coefficient alpha of Voc	[1/k]	-0.0037
Temperature coefficient gamma of Pmpp	[1/k]	-0.0045

Mechanical parameters

Dimensions(mm)	1,476*680*35
Weight(kg)	12.5
Cell type(quantity/technology)	36/polycrystalline/156x156
Encapsulation materials	Ethylene Vinyl Acetate(EVA)
Frame	Robust anodized aluminum alloy

Working conditions

Maximum system voltage	DC 1000V(TUV)/600V(UL)
Operating temperature	-40℃~+85℃
Maximum series fuse	15A
Max.wind load/Max.snow load	2400Pa/5400Pa
Grouding conductivity	<0.1
Insulation resistance	≥100M
Application class	Class A

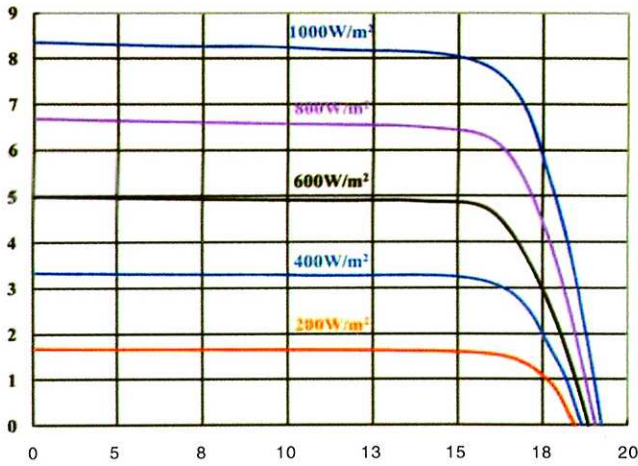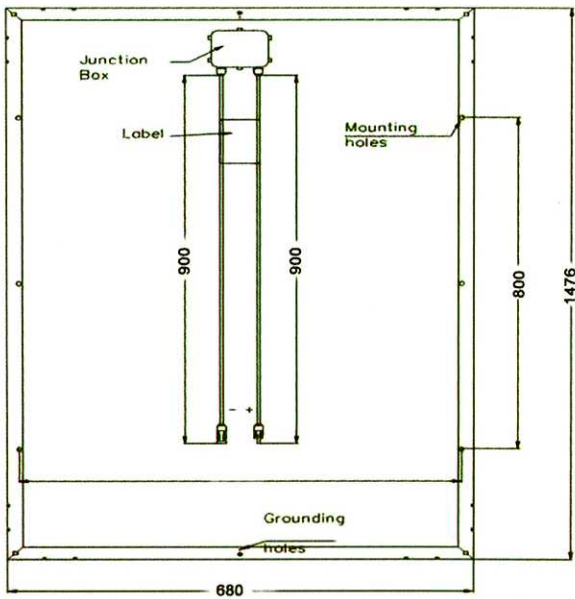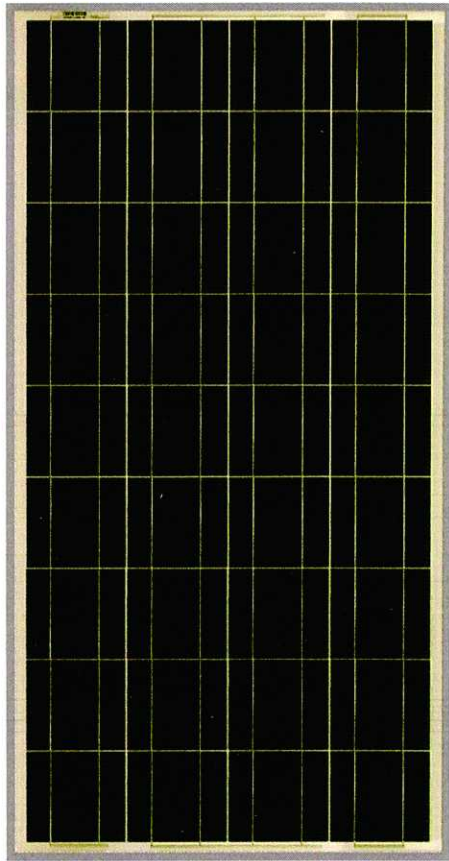

Solar Energy Product

Zhejiang Ganghang Solar Technology Co.,Ltd.

GH Solar

GH 36PCS MONO SERIES 1476X680X35MM

Monocrystalline series

Terbuat dari kristal silikon silinder yang memiliki efisiensi sel tertinggi.

Electrical parameters

Electrical parameters at STC(1,000W/m²), 25°C, AM 1.5 according to EN 60904-3

Module type	[M]	GH150M36	GH140M36	GH130M36	GH120M36
Power output	[W]	150	140	130	120
Power output tolerances	[%]	±3	±3	±3	±3
Module efficiency	[%]	18.0	17.5	17.0	16.5
Voltage at Pmax,Vmpp	[V]	18.0	18.0	17.2	17.2
Current at Pmax,Impp	[A]	8.35	7.80	7.56	7.05
Open circuit voltage Voc	[V]	22.20	22.20	22.20	21.60
Short circuit current Isc	[A]	8.85	8.67	8.50	8.40

Parameters of thermal characteristics




NOCT(Nominal Operating Cell Temperatures)	[°C]	46 ± 2
Temperature coefficient beta of Isc	[1/k]	+0.0006
Temperature coefficient alpha of Voc	[1/k]	-0.0037
Temperature coefficient gamma of Pmpp	[1/k]	-0.0045

Mechanical parameters

Dimensions(mm)	1,476*680*35
Weight(kg)	12.5
Cell type(quantity/technology)	36/mono crystalline/156x156
Encapsulation materials	Ethylene Vinyl Acetate(EVA)
Frame	Robust anodized aluminum alloy

Working conditions

Maximum system voltage	DC 1000V(TUV)/600V(UL)
Operating temperature	-40°C~+85°C
Maximum series fuse	15A
Max.wind load/Max.snow load	2400Pa/5400Pa
Grounding conductivity	<0.1
Insulation resistance	≥100M
Application class	Class A

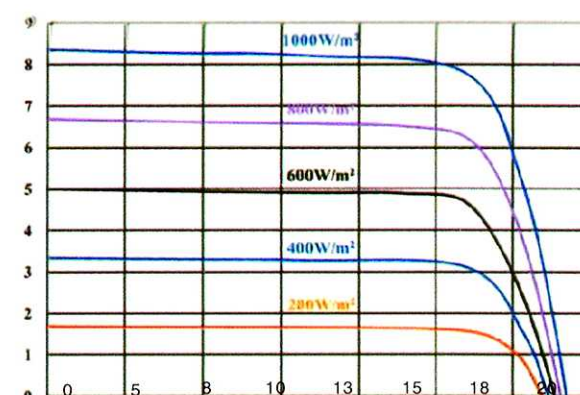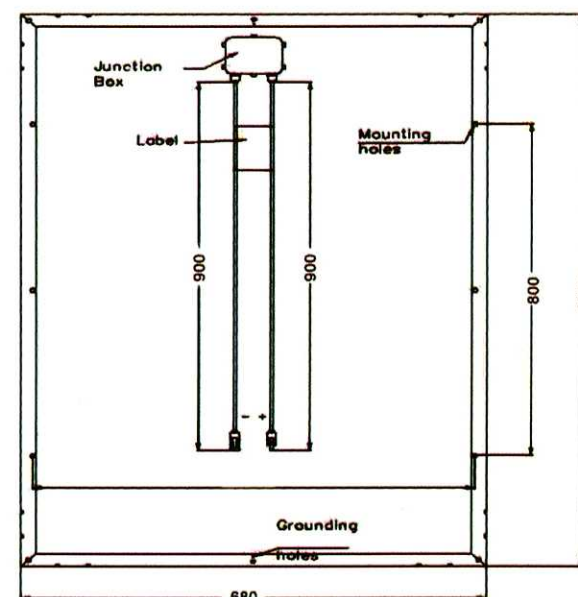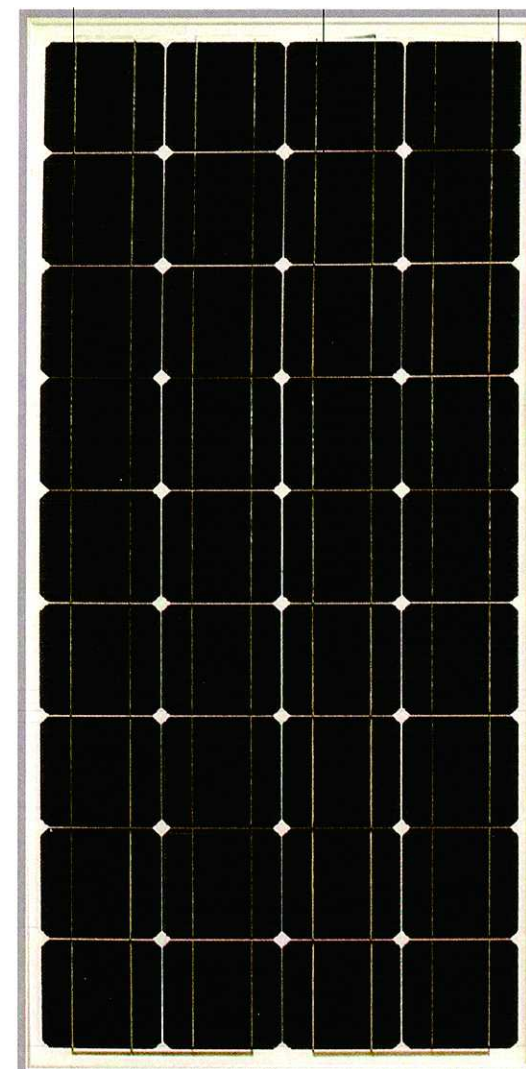

GH 36PCS MONO SERIES 1200X550X35MM

Electrical parameters

Electrical parameters at STC(1,000W/m²), 25°C, AM 1.5 according to EN 60904-3

Module type	[M]	GH100M36	GH90M36	GH85M36	GH80M36
Power output	[W]	100	90	85	80
Power output tolerances	[%]	±3	±3	±3	±3
Module efficiency	[%]	14.5	14.0	13.5	13.0
Voltage at Pmax, Vmpp	[V]	18.0	18.0	17.2	17.2
Current at Pmax, Imp	[A]	5.55	5.10	5.00	4.80
Open circuit voltage Voc	[V]	22.60	21.60	22.60	21.60
Short circuit current Isc	[A]	5.95	5.45	5.35	5.25

Parameters of thermal characteristics




NOCT(Nominal Operating Cell Temperatures)	[°C]	46 ± 2
Temperature coefficient beta of Isc	[1/k]	+0.0006
Temperature coefficient alpha of Voc	[1/k]	-0.0037
Temperature coefficient gamma of Pmpp	[1/k]	-0.0045

Mechanical parameters

Dimensions(mm)	1,200*550*35
Weight(kg)	8.0
Cell type(quantity/technology)	36/monocrystalline/125x125
Encapsulation materials	Ethylene Vinyl Acetate(EVA)
Frame	Robust anodized aluminum alloy

Working conditions

Maximum system voltage	DC 1000V(TUV)/600V(UL)
Operating temperature	-40°C~+85°C
Maximum series fuse	15A
Max.wind load/Max.snow load	2400Pa/5400Pa
Grouding conductivity	<0.1
Insulation resistance	≥100M
Application class	Class A

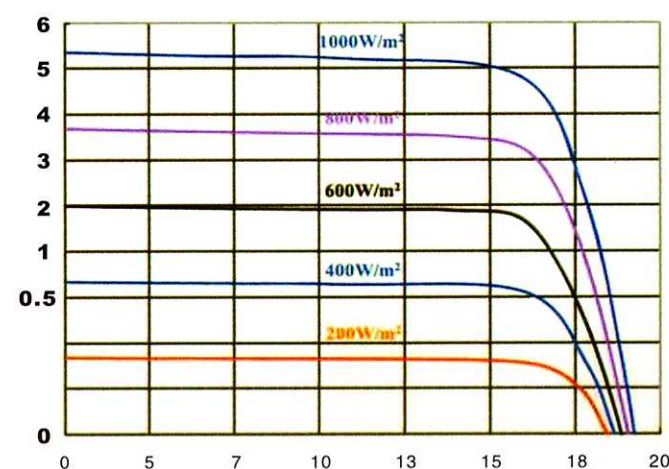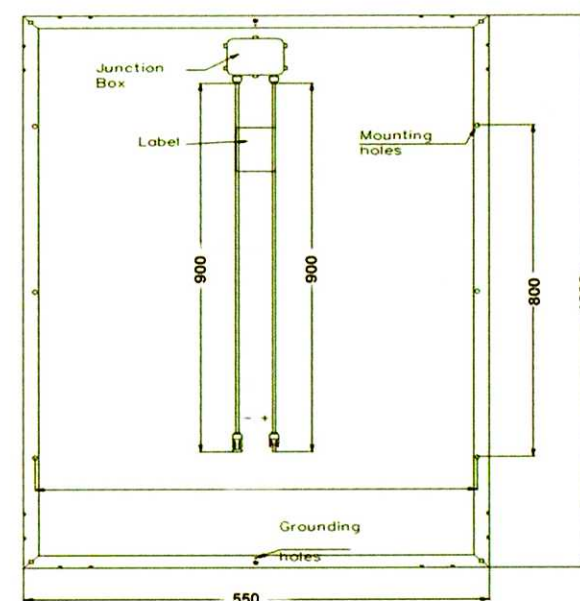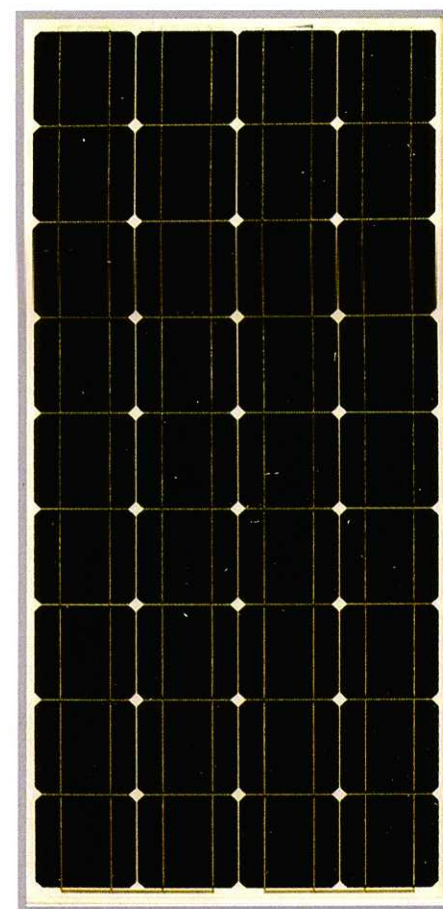

GH 60PCS POLY SERIES 1650X992X40MM

Polycrystalline series

Terbuat dari blok silikon berbentuk kubus dengan biaya yang lebih murah.

Electrical parameters

Electrical parameters at STC(1,000W/m²), 25°C, AM 1.5 according to EN 60904-3

Module type	[P]	GH240P60	GH230P60	GH220P60	GH210P60
Power output	[W]	240	230	220	210
Power output tolerances	[%]	±3	±3	±3	±3
Module efficiency	[%]	15.0	14.5	14.0	13.5
Voltage at Pmax,Vmpp	[V]	30.20	29.28	28.65	28.40
Current at Pmax,Impp	[A]	7.96	7.87	7.69	7.4
Open circuit voltage Voc	[V]	37.70	37.20	36.80	36.30
Short circuit current Isc	[A]	8.38	8.29	8.22	8.15

Parameters of thermal characteristics

NOCT(Nominal Operating Cell Temperatures)	[°C]	46 ± 2
Temperature coefficient beta of Isc	[1/k]	+0.0006
Temperature coefficient alpha of Voc	[1/k]	-0.0037
Temperature coefficient gamma of Pmpp	[1/k]	-0.0045

Mechanical parameters

Dimensions(mm)	1,650*992*40
Weight(kg)	18.5
Cell type(quantity/technology)	60/polycrystalline/156x156
Encapsulation materials	Ethylene Vinyl Acetate(EVA)
Frame	Robust anodized aluminum alloy

Working conditions

Maximum system voltage	DC 1000V(TUV)/600V(UL)
Operating temperature	-40°C~+85°C
Maximum series fuse	15A
Max.wind load/Max.snow load	2400Pa/5400Pa
Grouding conductivity	<0.1
Insulation resistance	≥100M
Application class	Class A

