

76 MD

PVC tilt and turn window & door system

Centre-seal (MD) PVC system on a 76 mm, six-chamber profile with galvanised steel reinforcement. Impact configurations are Large Missile HVHZ approved; non-impact variants cover regions outside HVHZ. Supplied and installed factory-direct by VALDA. Florida Product Approvals held by Kömmerling USA Inc.

76 mm	6	0.77	50 mm	47 dB	±75
BUILD DEPTH	CHAMBERS	UW W/M ² K FROM	GLAZING TO	RW ACOUSTIC TO	PSF DESIGN PRESSURE

At a glance

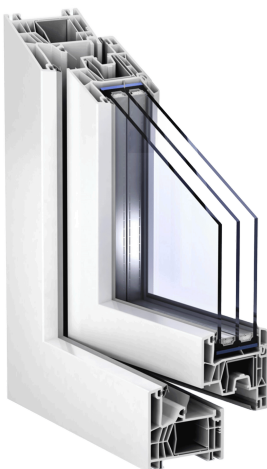
- Six-chamber 76 mm PVC profile with centre-seal (MD) three-gasket sealing
- Galvanised steel reinforcement through the frame and sash chambers
- Large Missile impact rating for HVHZ coastal projects
- Tilt and turn, fixed, balcony door and entry door configurations
- Any RAL as Renolit surface foil or solid colour, dual-colour standard
- Florida Product Approved, NAMI certified, tested to TAS and ASTM

Configurations

- Tilt and turn, single and double vent
- Fixed / picture
- Balcony door (HVHZ impact)
- Inswing and outswing entry doors (76 AD / 76 MD)

Performance

ENERGY	
Thermal transmittance, Uw	from 0.77 W/m ² K
Frame, Uf	from 1.0 W/m ² K
Glazing	double / triple, to 50 mm
COMFORT	
Air infiltration	ASTM E283
Water penetration	ASTM E331 / TAS 202
Acoustic reduction, Rw	up to 47 dB
SAFETY	
Impact	Large Missile · HVHZ
Design pressure	to +75 / -75 psf
Debris / cyclic	ASTM E1886 / E1996 · TAS 201/203



PROFILE SECTION · 76 MM

- 01 Six-chamber PVC profile**
76 mm build depth for thermal performance, drainage and rigidity.
- 02 Centre-seal gasketing**
Continuous co-extruded seals on glass and frame, three sealing planes.
- 03 Galvanised steel core**
Steel reinforcement inside the chambers carries the structural load.
- 04 Warm-edge IGU, to 50 mm**
Double or triple glazing with a low-conductivity warm-edge spacer.

Florida Product Approvals

HOLDER KÖMMERLING USA INC. · KEYSTONE CERTIFICATIONS · METHOD 1 OPTION A · EOR ROBERT J. AMORUSO PE 49752 · 2023 FBC

IMPACT / HVHZ

FL NUMBER	CONFIGURATION	DESIGN PRESSURE	EVAL REPORT
FL26935.1	76 MD Tilt & Turn — single	±65 psf	ACE-1003 Rev2
FL26935.2	76 MD Tilt & Turn — double	±65 psf	ACE-1004 Rev2
FL26936.1	76 MD Picture / Fixed	+75 / -75 psf	ACE-1005 Rev2
FL26937.1	76 MD Balcony Door	±65 psf	ACE-1006 Rev2

NON-IMPACT — OUTSIDE HVHZ

FL NUMBER	CONFIGURATION	DESIGN PRESSURE	EVAL REPORT
FL26935.3	HADK 76 MD Tilt & Turn — single	Per drawing	ACE-1024 Rev2
FL26935.4-.5	HADKZ 76 MD — double, false / fixed mullion	Per drawing	ACE-1024 Rev2
FL26935.6-.7	HADKZ 76 MD — transom, fixed / field mullion	Per drawing	ACE-1025 Rev2
FL26937.2	76 AD Inswing Entry Door	±50 psf	ACE-1162
FL26937.3	76 AD Outswing Entry Door	±50 psf	ACE-1164
FL26937.4	76 MD Inswing Entry Door	±50 psf	—




Technical properties

System depth	76 mm	Chambers	6
Sealing	Centre-seal, 3 gasket	Glazing thickness	24 - 50 mm
Reinforcement	Galvanised steel	Max vent weight	to 130 kg
Profile	Kömmerring 76 MD/AD	Max size	Per sealed drawing

Test standards

- AAMA/WDMA/CSA 101/I.S.2/A440
- ASTM E1886 / E1996 — impact & wind-borne debris
- TAS 201 / 202 / 203 — missile, static, cyclic
- ASTM E283 / E330 / E331 — air, structural, water

Colours & finishes

							
White RAL 9016	Cream RAL 9001	Quartz Grey RAL 7039	Basalt Grey RAL 7012	Anthracite RAL 7016	Black Brown RAL 8022	Golden Oak Foil	Mahogany Foil

Documentation

Technical spec sheet PDF · THIS DOCUMENT	CAD section detail DWG / DXF	BIM object IFC	FL Product Approval FLORIDABUILDING.ORG
---	---------------------------------	-------------------	--

Data compiled from the manufacturer system documentation and the Florida Product Approval record, verified against the DBPR portal (2023 FBC). Thermal and acoustic values are system and glazing dependent. Design pressures, sizes and limits of use are governed by the sealed installation drawings. Confirm approval coverage for the specific opening before specifying. Colour swatches are screen approximations; confirm against a physical foil sample.