

VALDA GROUP · CERTIFIED FOR THE UNITED STATES

Certified Systems

Every window, door, sliding and curtain wall system we supply to the United States. Tested to the North American performance standards, with certified configurations, limits of use and supporting documentation for each.

ABOUT THIS DOCUMENT

What this catalogue is for.

A specification reference for the United States. Every system here is tested to the North American performance standards, and every certified configuration is listed with the installation drawing and evaluation report that govern it.

Design pressures, maximum sizes, anchorage and glazing limitations are configuration specific. Where this catalogue gives a figure, it is the figure carried on the certification. Where it does not, the governing installation drawing is named so it can be requested.

Nothing here replaces the sealed installation instructions. Confirm the current revision before specifying.

SPECIFYING OUTSIDE FLORIDA

Our systems are tested to AAMA / WDMA / CSA 101 / I.S.2 / A440 and the ASTM series, the standards used by code officials nationwide. They also hold Florida Product Approval, which is the most demanding fenestration jurisdiction in the country. For a project anywhere else, the performance class and design pressure are the figures to specify against. The FL numbers are evidence of the standard met, not a limit on where the systems can be used.

HOW TO READ AN ENTRY

FL number	The state approval. A number such as FL39802 is the application; FL39802.3 is the individual certified product within it. Both are given.
HVHZ	Approved for the High Velocity Hurricane Zone, meaning Miami - Dade and Broward counties.
Impact	Large missile, small missile, or non - impact. Non - impact products need an approved external covering in wind - borne debris regions.
WZ3	Wind Zone 3. Impact rated outside the HVHZ. An impact resistant covering is required in Wind Zone 4.
Design pressure	Positive and negative, in pounds per square foot, as carried on the approval.

PERFORMANCE CLASS

Written as a letter grade and a pressure, for example CW - PG65. R residential, LC light commercial, CW commercial, AW architectural. The number after PG is the design pressure rating in psf. This is the figure most jurisdictions specify against.

Contents

01	About this document	02
	Standards and certification	04
02	Summary tables	05
	VALDA certified systems	05
	Reynaers systems	06
	Kömmerling systems	07
03	VALDA	08
	Vista Guard — aluminium, impact	09
	Vision Guard — PVC, impact	10
	Vision — PVC, non-impact	11
04	VALDA by Reynaers	12
	MasterLine 8 — windows	13
	MasterLine 8 — doors	14
	MasterPatio and ConceptWall 50	15
	CP 155 lift and slide	16
	CS 77 windows	17
	Non-impact performance, NAMI tested	18
05	VALDA by Kömmerling	20
	76 MD windows	21
	Series 88 windows	22
	Doors	23
	Premidoor 88 lift and slide	24
06	Approval register	25
	Contact	26



CERTIFICATIONS

Certified to perform, across the country.

Each approval names the standards the product was tested against and the certified configurations it covers. Allowable sizes, anchorage and glazing are defined in the sealed installation instructions named on each page.

AAMA / WDMA / CSA	101 / I.S.2 / A440. The North American fenestration standard, used by code officials nationwide. Editions 2008, 2011 and 2017 depending on the system.
ASTM	E283 air infiltration, E330 structural load, E331 water penetration. E1886 and E1996 for impact and cyclic pressure.
NAMI	National Accreditation and Management Institute. Certification agency for the VALDA proprietary systems.
Performance class	R, LC, CW and AW grades with a design pressure rating in psf. The figure to specify against in most jurisdictions.
FL Product Approval	Florida Building Code. The most demanding fenestration approval in the country, administered by the Department of Business and Professional Regulation.
HVHZ	High Velocity Hurricane Zone. Miami-Dade and Broward counties, the strictest wind and impact requirement in the United States.
TAS	201, 202 and 203, 1994 editions. Large missile impact, uniform static air pressure and cyclic wind pressure, required for the HVHZ.

VALDA certified systems

Manufactured, tested and certified in VALDA's own name. Approval holder Valda 90 OOD.

SYSTEM	MATERIAL	OPERATION	PERFORMANCE CLASS	DESIGN PRESSURE PSF	IMPACT	HVHZ	FL NUMBER	MAX CERTIFIED SIZE
Vista Guard	Aluminium	Picture / fixed	CW-PG65	±65	Large missile	Yes	FL39802.3	59 × 98.4 in
Vista Guard	Aluminium	Tilt & turn	CW-PG65	±65	Large missile	Yes	FL39801.4	48 × 78 in
Vision Guard	PVC	Picture / fixed	CW-PG65	±65	Large missile	Yes	FL39802.1	59.1 × 98.4 in
Vision Guard	PVC	Tilt & turn	CW-PG65	±65	Large missile	Yes	FL39801.1	48 × 78 in
Vision	PVC	Picture / fixed	CW-PG65	±65	Non-impact	No	FL39802.2	59.1 × 98.4 in
Vision	PVC	Tilt & turn, single	CW-PG65	±65	Non-impact	No	FL39801.2	48 × 78 in
Vision	PVC	Tilt & turn, double	CW-PG50	±50	Non-impact	No	FL39801.3	96 × 78 in

Applications FL39801-R2 and FL39802-R2. Sizes as carried on the certification and the sealed installation instructions NL-0142 to NL-0152.

VALDA by Reynaers

Aluminium partner systems. Approval holder Reynaers.

SYSTEM	OPERATION	FL NUMBER	HVHZ	IMPACT	DESIGN PRESSURE
MasterLine 8	Fixed window	FL47832.1	No	WZ3 impact	Per REY001
MasterLine 8	Tilt & turn / turn & tilt	FL47833.1	No	WZ3 impact	Per REY002
MasterLine 8	Casement	FL47834.1	No	WZ3 impact	Per REY003
MasterLine 8	Awning	FL47835.1	No	WZ3 impact	Per REY004
MasterLine 8	Entrance side hinged door	FL47836.1	No	WZ3 impact	Per REY006
MasterLine 8	Terrace side hinged door	FL47836.2	No	WZ3 impact	Per REY005
MasterPatio	Sliding glass door	FL47837.1	No	WZ3 impact	Per REY007
ConceptWall 50 STD	Curtain wall	FL47838.1	No	WZ3 impact	Per REY008
CP 155	Lift and slide door	FL39164.1	Yes	Large missile	±65 psf
CS 77	Fixed window	FL28671.1 / .2	.2 only	Impact rated	±65 psf
CS 77	Casement	FL28672.1 / .2	.2 only	Impact rated	±65 psf
CS 77	Tilt & turn inswing	FL38158.1 / .2	.2 only	Impact rated	±65 psf

MasterLine 8, MasterPatio and ConceptWall 50 carry no design pressure on the approval record. Allowable sizes and pressures are configuration specific and defined in the sealed installation drawings named above. CS 77 approvals list a standard and an HVHZ variant under each application.

VALDA by Kömmerling

German PVC profile systems. Approval holder Kommerling USA Inc.

SYSTEM	OPERATION	FL NUMBER	HVHZ	IMPACT	DESIGN PRESSURE PSF
76 MD	Tilt & turn, single	FL26935.1	Yes	Large missile	±65
76 MD	Tilt & turn, double	FL26935.2	Yes	Large missile	±65
HADK 76 MD	Tilt & turn, single	FL26935.3	No	Non - impact	Per SCS / NL-0137
HADKZ 76 MD	Tilt & turn, double and transom variants	FL26935.4–.7	No	Non - impact	Per NL-0137 / NL-0138
76 MD	Picture / fixed	FL26936.1	Yes	Large missile	+75 / –75
Series 88	Fixed	FL26936.2	No	Non - impact	+40 / –40
Series 88	Dual action	FL31360.1	No	Non - impact	+60 / –60
76 MD	Balcony door	FL26937.1	Yes	Large missile	±65
76 AD	Inswing entry door	FL26937.2	No	Non - impact	±50
76 AD	Outswing entry door	FL26937.3	No	Non - impact	±50
76 MD	Inswing entry door	FL26937.4	No	Non - impact	±50
Premidoor 88	Lift and slide, XO / OX	FL26934.1	Yes	Large missile	±55
Premidoor 88	Lift and slide, OXXO	FL26934.2	Yes	Large missile	±55

PART 03 · MANUFACTURER

VALDA

Proprietary aluminium and PVC systems, designed, tested and certified in VALDA's own name for the United States. CW-PG65 performance class, in impact rated and non-impact configurations.

SYSTEMS IN THIS SECTION

Vista Guard

ALUMINIUM · LARGE MISSILE

Vision Guard

PVC · LARGE MISSILE

Vision

PVC · NON-IMPACT

Vista Guard


Aluminium. Large missile impact, approved inside and outside the HVHZ. Application FL39802 -R2 (fixed) and FL39801 -R2 (dual action).

Picture / fixed window FL39802.3

HVHZ APPROVED

LARGE MISSILE

ALUMINIUM



Operation	Fixed, non - operable
Performance class	CW-PG65
Design pressure	±65 psf
Water penetration	15.0 psf
Impact rating	Large missile
HVHZ	Approved
Max certified size	1499 × 2499 mm · 59 × 98.4 in

DOCUMENTATION

Installation	NL-0145 Rev0
Evaluation report	ACE-1070 Rev1
NAMI certificate	NI015425

LIMITS OF USE

- Approved for use in and outside the HVHZ
- No external impact protection required
- Anchorage and glazing per NL-0145

Tilt & turn window FL39801.4

HVHZ APPROVED

LARGE MISSILE

ALUMINIUM



Operation	Tilt & turn, dual action
Performance class	CW-PG65
Design pressure	±65 psf
Water penetration	9.75 psf
Impact rating	Large missile
HVHZ	Approved
Max certified size	1219 × 1981 mm · 48 × 78 in

DOCUMENTATION

Installation	NL-0144 Rev0
Evaluation report	ACE-1069 Rev1
NAMI certificate	NI015433


LIMITS OF USE

- Approved for use in and outside the HVHZ
- European dual action operation, inward tilt and inward opening
- Anchorage and glazing per NL-0144

Vision Guard

PVC with laminated impact glazing. Large missile impact, approved inside and outside the HVHZ.

Picture / fixed window FL39802.1

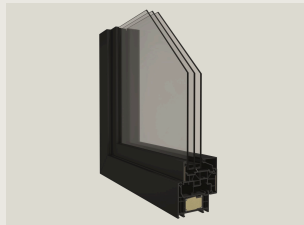HVHZ APPROVED		LARGE MISSILE		PVC	
				Operation	Fixed, non-operable
				Performance class	CW-PG65
				Design pressure	±65 psf
				Water penetration	15.0 psf
				Impact rating	Large missile
				HVHZ	Approved
				Max certified size	1500 × 2500 mm · 59.1 × 98.4 in

DOCUMENTATION

Installation	NL-0143 Rev0
Evaluation report	ACE-1068 Rev2
NAMI certificate	NI015426

LIMITS OF USE


- Approved for use in and outside the HVHZ
- Laminated impact glazing
- Anchorage and glazing per NL-0143

Tilt & turn window FL39801.1

HVHZ APPROVED

LARGE MISSILE

PVC

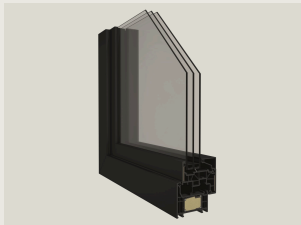

Operation	Tilt & turn, dual action
Performance class	CW-PG65
Design pressure	±65 psf
Water penetration	9.75 psf
Impact rating	Large missile
HVHZ	Approved
Max certified size	1219 × 1981 mm · 48 × 78 in

DOCUMENTATION

Installation	NL-0142 Rev0
Evaluation report	ACE-1067 Rev2
NAMI certificate	NI015434

LIMITS OF USE

- Approved for use in and outside the HVHZ
- Laminated impact glazing
- Anchorage and glazing per NL-0142

Vision

Non-impact PVC for projects outside wind-borne debris regions. An approved external covering is required where debris protection applies.

Picture / fixed FL39802.2

NON - HVHZ		NON - IMPACT		PVC	
Operation			Fixed		
Performance class			CW-PG65		
Design pressure			±65 psf		
Impact rating			Non-impact		
HVHZ			Not approved		
Max size			59.1 × 98.4 in		
DOCUMENTATION					
Installation			NL-0151 Rev0		
Evaluation report			ACE-1071 Rev1		
NAMI certificate			NI015427		

Tilt & turn, single FL39801.2

NON - HVHZ		NON - IMPACT		PVC	
Operation			Tilt & turn, single sash		
Performance class			CW-PG65		
Design pressure			±65 psf		
Impact rating			Non-impact		
HVHZ			Not approved		
Max size			48 × 78 in		
DOCUMENTATION					
Installation			NL-0152 Rev0		
Evaluation report			ACE-1073 Rev1		
NAMI certificate			NI015428		

Tilt & turn, double FL39801.3

NON - HVHZ		NON - IMPACT		PVC	
Operation			Tilt & turn, double sash		
Performance class			CW-PG50		
Design pressure			±50 psf		
Impact rating			Non-impact		
HVHZ			Not approved		
Max size			96 × 78 in		
DOCUMENTATION					
Installation			NL-0152 Rev0		
Evaluation report			ACE-1073 Rev1		
NAMI certificate			NI015428.01		

The double sash configuration covers openings to 96 in at a reduced design pressure of ±50 psf. Confirm against the governing wind load before specifying.

PART 04 · PARTNER SYSTEM

VALDA by Reynaers

Aluminium windows, doors, sliding glass, curtain wall and lift and slide. Impact rated for Wind Zone 3 and for the HVHZ, with non-impact configurations tested to NAMI.

SYSTEMS IN THIS SECTION

MasterLine 8

WINDOWS AND DOORS · WZ3

CP 155

LIFT AND SLIDE · HVHZ

MasterPatio

SLIDING GLASS · WZ3

CS 77

WINDOWS · HVHZ AND OUTSIDE

ConceptWall 50 STD

CURTAIN WALL · WZ3

MasterLine 8 — windows

Impact rated for Wind Zone 3, outside the HVHZ.



OUTSIDE HVHZ

WZ3 IMPACT

ALUMINIUM

CONFIGURATION	FL NUMBER	INSTALLATION DRAWING	EVALUATION REPORT
Fixed window	FL47832.1	REY001	PER10055
Tilt & turn / turn & tilt	FL47833.1	REY002	PER10056
Casement	FL47834.1	REY003	PER10057
Awning	FL47835.1	REY004	PER10058

LIMITS OF USE

- Complies with the Florida Building Code excluding the HVHZ
- Impact rated for Wind Zone 3. An impact resistant covering is required in Wind Zone 4
- No design pressure is carried on the approval. Allowable sizes and pressures are configuration specific and defined in the sealed installation drawings
- Product anchors must be installed per the governing REY drawing

MasterLine 8 — doors


Side hinged entrance and terrace doors, impact rated for Wind Zone 3 under application FL47836.

Entrance side hinged door FL47836.1

OUTSIDE HVHZ

WZ3 IMPACT

ALUMINIUM



Operation	Side hinged entrance door
Impact rating	Wind Zone 3
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	Per installation drawing

DOCUMENTATION

Installation	REY006
Evaluation report	PER10060
Category	Swinging exterior door

LIMITS OF USE


- Complies with the FBC excluding the HVHZ
- Impact resistant covering required in Wind Zone 4
- Refer to REY006 for allowable sizes and design pressures

Terrace side hinged door FL47836.2

OUTSIDE HVHZ

WZ3 IMPACT

ALUMINIUM



Operation	Side hinged terrace door
Impact rating	Wind Zone 3
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	Per installation drawing

DOCUMENTATION

Installation	REY005
Evaluation report	PER10059
Category	Swinging exterior door

LIMITS OF USE

- Complies with the FBC excluding the HVHZ
- Impact resistant covering required in Wind Zone 4
- Refer to REY005 for allowable sizes and design pressures

MasterPatio and ConceptWall 50


Sliding glass and curtain wall, both impact rated for Wind Zone 3 outside the HVHZ.

MasterPatio sliding glass door FL47837.1

OUTSIDE HVHZ

WZ3 IMPACT

SLIDING



System	Sliding glass door assembly
Material	Aluminium 6060-T66
Impact rating	Wind Zone 3
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	Per installation drawing

DOCUMENTATION

Installation	REY007
Evaluation report	PER10061

LIMITS OF USE


- No additional impact covering required in Wind Zone 3 or less
- Impact resistant covering required in Wind Zone 4
- Anchors and allowable sizes per REY007

ConceptWall 50 STD curtain wall FL47838.1

OUTSIDE HVHZ

WZ3 IMPACT

CURTAIN WALL



System	Curtain wall, panel wall category
Material	Aluminium 6060-T66
Impact rating	Wind Zone 3
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	Per installation drawing

DOCUMENTATION


Installation	REY008, signed and sealed
Evaluation report	PER10062

LIMITS OF USE

- Wind-borne debris compliant per Chapter 16 of the FBC
- Impact resistant covering required in Wind Zone 4
- Anchor embedment must follow REY008. Site conditions deviating from it require site-specific engineering

CP 155 lift and slide

The only Reynaers system in this catalogue approved for the High Velocity Hurricane Zone. Large missile impact under TAS 201 and TAS 203.

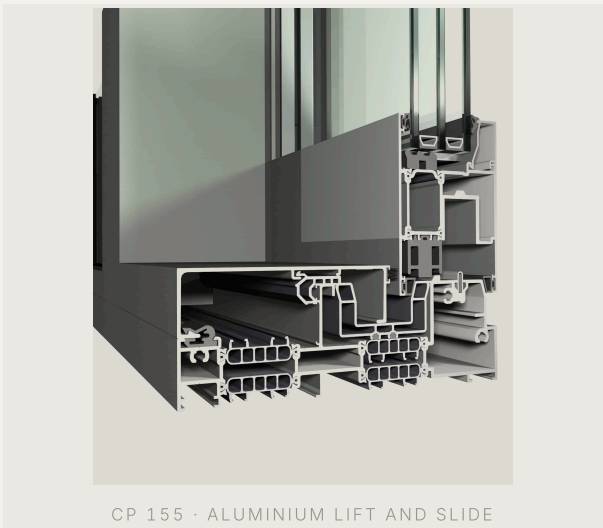

- HVHZ APPROVED
- LARGE MISSILE
- LIFT & SLIDE

FL number	FL39164.1, application FL39164-R1
Operation	Lift and slide sliding door system
Impact rating	Large missile, TAS 201 and TAS 203
HVHZ	Approved
Outside HVHZ	Approved
Design pressure	+65 / -65 psf
Compliance	2023 Florida Building Code
Category	Sliding exterior door assemblies

DOCUMENTATION

Installation drawing	DWG 21-31F 2023
Evaluation report	CP155 Lift and Slide LMI PAE 2023

TEST STANDARDS

- ASTM E283 air infiltration
- ASTM E330 structural load
- ASTM E331 / TAS 202 water penetration
- ASTM F842 forced entry
- TAS 201 and TAS 203 large missile and cyclic

Maximum sizes, span against load combinations, anchor type and glazing limitations must follow installation drawing 21-31F.

CS 77 windows

Impact rated aluminium windows with a standard and an HVHZ variant under each application. All configurations carry ±65 psf design pressure.



- HVHZ VARIANTS
- IMPACT RATED
- ALUMINIUM

CONFIGURATION	FL NUMBER	HVHZ	INSTALLATION DRAWING
Fixed window	FL28671.1	No	CS77 Fix Dwg3
Fixed window, HVHZ	FL28671.2	Yes	CS77 FixHZ Dwg3
Casement	FL28672.1	No	CS77 Case Dwg3
Casement, HVHZ	FL28672.2	Yes	CS77 CaseHZ Dwg3
Tilt & turn inswing	FL38158.1	No	CS77 TT Dwg3
Tilt & turn inswing, HVHZ	FL38158.2	Yes	CS77 TTHZ Dwg3

LIMITS OF USE

- The .1 products are approved outside the HVHZ only. Shutters are not required in wind-borne debris regions
- The .2 products are approved inside and outside the HVHZ. Shutters are required above 30 ft within the HVHZ
- All glazing configurations comply with ASTM E1300 per the installation drawings

Non - impact performance — windows and doors

Configurations for projects outside wind - borne debris regions, certified by NAMI for structural, air and water performance. Specify against the performance class.

WINDOWS

SYSTEM	OPERATION	PERFORMANCE CLASS	TEST SIZE	WATER
CS 68 (TC-14-118)	Inswing casement	AW-PG100	35.44 × 59.06 in	15.66 psf
MasterLine 8	Casement	CW-PG95 / AW-PG100	34.69 × 58.69 in	15.04 psf
CS 68 (TC-14-129)	Inswing hopper / awning	AW-PG40	59.06 × 35.44 in	15.66 psf
MasterLine 8	Awning	AW-PG100	59 × 35.75 in	15.04 psf
CS 68	Fixed	AW-PG75	60 × 99 in	15.20 psf
MasterLine 8	Fixed	AW-PG100	58.88 × 98.44 in	15.04 psf
SlimLine 38	Fixed	AW-PG100	59.06 × 98.44 in	12.11 psf

DOORS

SYSTEM	OPERATION	PERFORMANCE CLASS	TEST SIZE	WATER
MasterLine 8	Side hinged	+45 / -70 psf	40.38 × 105.69 in	12 psf
CS 68	Outswing side hinged	CW-PG90	47.31 × 95.75 in	12.11 psf
CS 68	Inswing side hinged	R-PG20	47.31 × 95.69 in	3.13 psf
CS 68 low sill	Outswing / inswing side hinged	R-PG15 / CW-PG30	47.25–47.31 × 94.50 in	2.92–4.59 psf
CS 38 low sill	Inswing / outswing side hinged	CW-PG30 / CW-PG40	47.25 × 94.50 in	4.59–6.06 psf
CS 68 (TC-15-006)	Inswing / outswing side hinged	CW-PG50	47.25 × 94.50 in	7.52–9.40 psf

These configurations carry NAMI certification rather than a Florida Product Approval. Confirm the jurisdiction accepts NAMI certification before specifying.

Non - impact performance — sliding and window wall

NAMI tested sliding glass and window wall configurations.

SYSTEM	CONFIGURATION AND TEST SIZE	PERFORMANCE CLASS	WATER PENETRATION
HFP 147 HiFinity	XO · 190.40 × 136.70 in	R-PG15	2.86 psf
HFP 147 HiFinity	XO · 122.05 × 118.11 in	AW-PG60 / CW-PG60	12.11 psf
HFP 147	XO · 189 × 118 in	CW-PG30	8.15 psf
HFP 147	OXXO · 196.81 × 137.75 in	LC-PG25	5.25 psf
CP 68 SGD	XO · 94.50 × 84.25 in	CW-PG60	12 psf
CP 68 SGD	XO · 122.06 × 98.19 in	CW-PG60	9 psf
CP 155-LS SGD	XO · 122 × 94.50 in	AW-PG60	12 psf
CT20_166 window wall	OOO / OOO · 148.66 × 261.69 in	60 psf	15 psf

Performance class notation follows AAMA / WDMA / CSA 101 / I.S.2 / A440. R residential, LC light commercial, CW commercial, AW architectural. The figure after PG is the design pressure rating in psf.

PART 05 · PARTNER SYSTEM

VALDA by Kömmerling

German PVC profile systems fabricated by VALDA. Large missile impact configurations approved for the HVHZ, alongside a non-impact range for the rest of the country.

SYSTEMS IN THIS SECTION

76 MD

WINDOWS · IMPACT AND NON-IMPACT

Premidoor 88

LIFT AND SLIDE · HVHZ

76 MD / 76 AD


BALCONY AND ENTRY DOORS

Series 88

FIXED AND DUAL ACTION WINDOWS

76 MD windows

Application FL26935-R6. Two large missile impact tilt and turn configurations approved for the HVHZ, and five non-impact HADK and HADKZ variants.

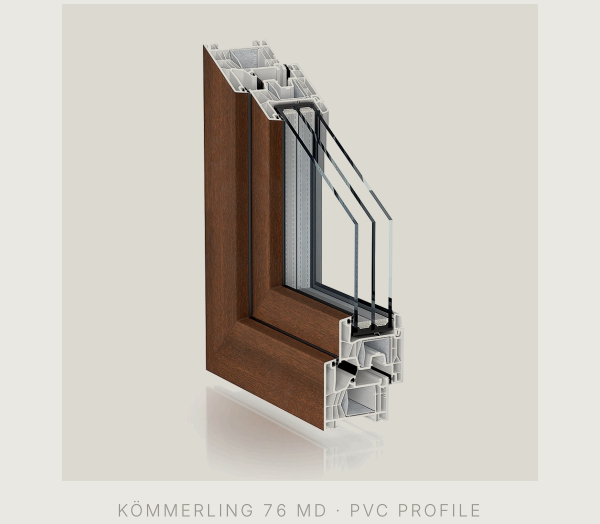

HVHZ APPROVEDLARGE MISSILEPVC				
CONFIGURATION	FL NUMBER	DESIGN PRESSURE	INSTALLATION	EVALUATION REPORT
Tilt & turn, single sash	FL26935.1	±65 psf	NL-0098	ACE-1003 Rev2
Tilt & turn, double sash	FL26935.2	±65 psf	NL-0099	ACE-1004 Rev2
Picture / fixed	FL26936.1	+75 / -75 psf	NL-0100	ACE-1005 Rev2
NON-HVHZNON-IMPACTPVC				
PROFILE	CONFIGURATION	FL NUMBER	INSTALLATION	EVALUATION REPORT
HADK 76 MD	Tilt & turn, single	FL26935.3	NL-0137	ACE-1024 Rev2
HADKZ 76 MD	Double, false mull post	FL26935.4	NL-0137	ACE-1024 Rev2
HADKZ 76 MD	Double, fixed mull post	FL26935.5	NL-0137	ACE-1024 Rev2
HADKZ 76 MD	Transom, fixed mull post	FL26935.6	NL-0138	ACE-1025 Rev2
HADKZ 76 MD	Transom, field mull post	FL26935.7	NL-0138	ACE-1025 Rev2


The HADK and HADKZ variants carry no design pressure on the approval. See the governing installation instructions for allowable pressures.

Series 88 windows

88 mm PVC profile. Non-impact fixed and dual action configurations for use outside the HVHZ.

Fixed window FL26936.2

NON-HVHZ **NON-IMPACT** PVC

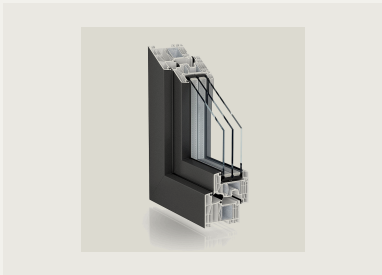

Operation	Fixed
Impact rating	Non-impact
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	+40 / -40 psf
Application	FL26936-R5

DOCUMENTATION


Installation	SCS-0021 Rev0
Evaluation report	ACE-1086 Rev0

LIMITS OF USE

- Approved for use outside the HVHZ only
- An approved external covering is required in wind-borne debris regions
- Anchorage per SCS-0021

Dual action window FL31360.1

NON-HVHZ **NON-IMPACT** PVC

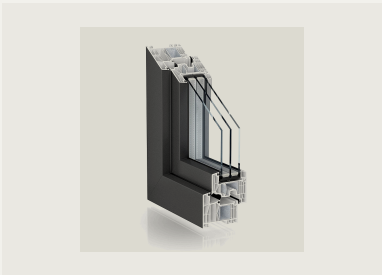

Operation	Dual action, tilt & turn
Impact rating	Non-impact
HVHZ	Not approved
Outside HVHZ	Approved
Design pressure	+60 / -60 psf
Application	FL31360-R3

DOCUMENTATION

Installation	SCS-0022 Rev0
Evaluation report	See approval record

LIMITS OF USE

- Approved for use outside the HVHZ only
- An approved external covering is required in wind-borne debris regions
- Anchorage per SCS-0022

Doors

Application FL26937 -R5. One large missile impact balcony door approved for the HVHZ, and three non - impact entry doors.



- HVHZ APPROVED
- LARGE MISSILE
- PVC

System	Series 76 MD vinyl balcony door
FL number	FL26937.1
HVHZ	Approved
Outside HVHZ	Approved
Design pressure	±65 psf
Installation	NL-0101 Rev0, evaluation report ACE - 1006 Rev2


- NON - HVHZ
- NON - IMPACT
- PVC

CONFIGURATION	FL NUMBER	DESIGN PRESSURE	INSTALLATION	EVALUATION REPORT
76 AD inswing entry door	FL26937.2	±50 psf	SCS-0047	ACE-1162
76 AD outswing entry door	FL26937.3	±50 psf	SCS-0049	ACE-1164
76 MD inswing entry door	FL26937.4	±50 psf	See approval record	—

The non - impact entry doors are approved outside the HVHZ only and require an approved external covering in wind - borne debris regions.

Premidoor 88 lift and slide

88 mm PVC lift and slide. Both the two panel and four panel configurations are large missile impact rated and approved for the HVHZ.

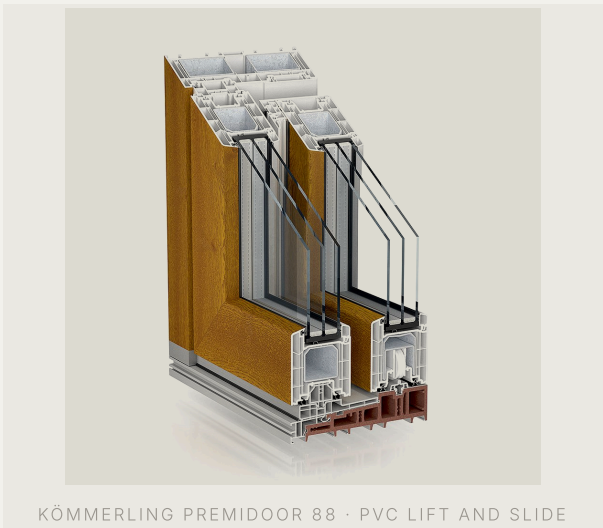

- HVHZ APPROVED
- LARGE MISSILE
- LIFT & SLIDE

CONFIGURATION	FL NUMBER	HVHZ	DESIGN PRESSURE	INSTALLATION	EVALUATION REPORT
XO / OX, two panel	FL26934.1	Yes	±55 psf	NL-0090	ACE-1001 Rev2
OXXO, four panel	FL26934.2	Yes	±55 psf	NL-0097	ACE-1002 Rev2

APPROVAL DETAIL

Application	FL26934-R4
Category	Sliding exterior door assemblies

TEST STANDARDS

- TAS 201, 1994 — large missile impact
- TAS 202, 1994 — uniform static air pressure
- TAS 203, 1994 — cyclic wind pressure

Design pressure is ±55 psf, lower than the ±65 psf carried by the 76 MD window range. Check against the governing wind load.

Approval register

Florida Product Approvals held against the systems in this catalogue, recorded under the 2023 Florida Building Code. Outside Florida, specify against the performance class and design pressure given on the system pages.

APPLICATION	APPROVAL HOLDER	CATEGORY
FL39801-R2	Valda 90 OOD	Windows / dual action
FL39802-R2	Valda 90 OOD	Windows / fixed
FL47832 – FL47836	Reynaers	Windows and swinging exterior doors
FL47837	Reynaers	Sliding exterior doors
FL47838	Reynaers	Panel walls / curtain walls
FL39164-R1	Reynaers	Sliding exterior doors
FL28671-R3	Reynaers	Windows / fixed
FL28672-R3	Reynaers	Windows / casement
FL38158-R1	Reynaers	Windows / dual action
FL26934-R4	Kommerling USA Inc.	Sliding exterior doors
FL26935-R6	Kommerling USA Inc.	Windows / casement
FL26936-R5	Kommerling USA Inc.	Windows / fixed
FL26937-R5	Kommerling USA Inc.	Swinging exterior doors
FL31360-R3	Kommerling USA Inc.	Windows / dual action

Individual certified products sit beneath each application, numbered FL00000.1, FL00000.2 and so on. Product numbers, limits of use and governing installation drawings are given on the system pages.

PART 06 · CONTACT

Let's talk about your project.

UNITED STATES

+1 689 280 2337

UNITED KINGDOM

+44 7495 418 555

BULGARIA

+359 894 781 200

WEBSITE

valdagroup.com

EMAIL

al.nikolcheva@valdagroup.com

Aleksandra Nikolcheva

CLIENT & PROJECT DIRECTOR

ENGINEERED IN EUROPE · DELIVERED WORLDWIDE

© 2026 VALDA 90 OOD