

Neuroprothetik Exercise 3

Mathematical Basics 2

Aleksandra Teska

29. May 2018

1 Implementation of following functions

Following methods were implemented as functions in Python:

- Forward (Explicit) Euler
- Heun Method
- Exponential Euler

2 Solve Functions

This exercise contain solving differential equation:

$$\frac{dV}{dt} = 1 - V - t \quad (1)$$

where $V(t = -4.5) = V_0 = 0.4$ with the, solvers implemented above. Vary the step size (1s, 0.5s, 0.1s, 0.012) and plot the results.

Plots can be found in section 4 on 1, 2, 3

Based on the plots we can notice the impact of the chosen step-size. As suggested, the resulted error of numerical approximation depends on the incremental step size. One can notice that with the biggest step size of 1s the suggested solutions overshoots/undershoots the desired solution.

Using a very small step size would be computationally problematic and also time costly. Additionally with a very small time step, the accumulated step error of t gets squared.

3 The Leaky Integrate and Fire Neuron

The goal of this exercise was to implement a model of the leaky integrate and fire neuron. The following implementation was used:

```
def LIFsin(T, dt, I):
    Cm = 1e-6
    g_leak = 100e-6
    V_rest = -60e-3
    V_thr = -20e-3
    V_spike = 20e-3

    t = np.linspace(0, T, int(T/dt))
    V = np.zeros(len(Isin))
    V[0] = V_rest

    for n in np.arange(0, len(Isin)-1):
        if (V[n] < V_thr):
            V[n+1] = V[n] + dt/Cm * (-g_leak * (V[n] - V_rest) + I[n])
        elif (V[n] == V_spike):
            V[n+1] = V_rest
        elif (V[n] >= V_thr):
            V[n+1] = V_spike
    return V, t
```

Given following parameters:

- $g_{leak} = 100 \mu S$
- $V_{rest} = -60 \text{ mV}$

And simulate the cell for 50 ms ($\Delta t = 25 \mu s$ should be sufficient) with the following current inputs:

- constant $10 \mu A$
- constant $20 \mu A$
- rectified 50Hz sinus with $10 \mu A$ amplitude
- rectified 50Hz sinus with $30 \mu A$ amplitude

3.1 Results interpretation

On the plots we can notice the spiking behavior of implemented integrated fire neuron. With this kind of implementation, the spike and reset of the potential value are happening almost instantaneously (within $2 \Delta t$), without any hyperpolarization.

Additionally, we can notice differences in between each simulation. with stimulation of $10 \mu A$ reaching the threshold value of potential takes around 5 ms, while for the same stimulus with an amplitude of $20 \mu A$ the needed time a bit shorter then 2.5 ms.

When the input was changed to sinusoidal wave with frequency of 50 Hz, we can notice that also the responses are happening with the given frequency. With lower amplitude of that signal, we can see one spike in each period of the sinusoidal wave. For higher amplitude of $30 \mu A$, we can observe multiple spikes.

4 Plots

4.1 Plots of functions implemented in section 1

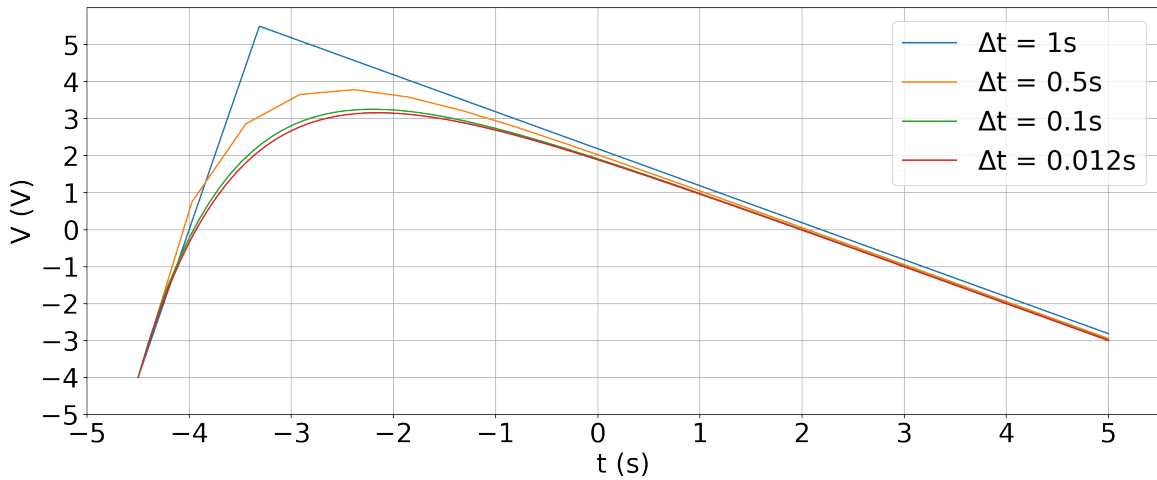


Figure 1: Approximations of the given differential equation in 2 with different methods and different step sizes Forward-Euler-Method. The different colors resemble the given timesteps visible in the legend.

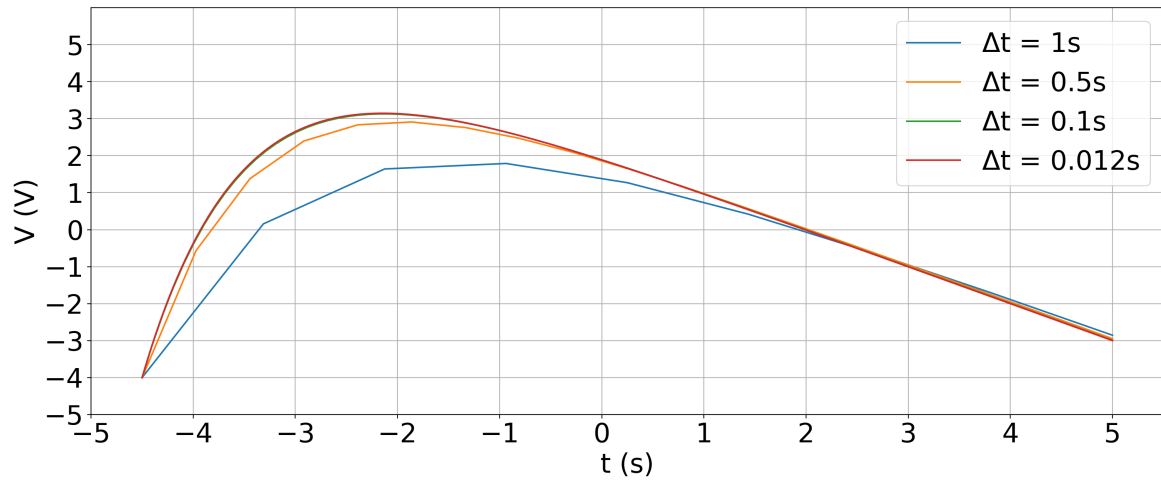


Figure 2: Approximations of the given differential equation in 2 with different methods and different step sizes Heun-Method. The different colors resemble the given timesteps visible in the legend.

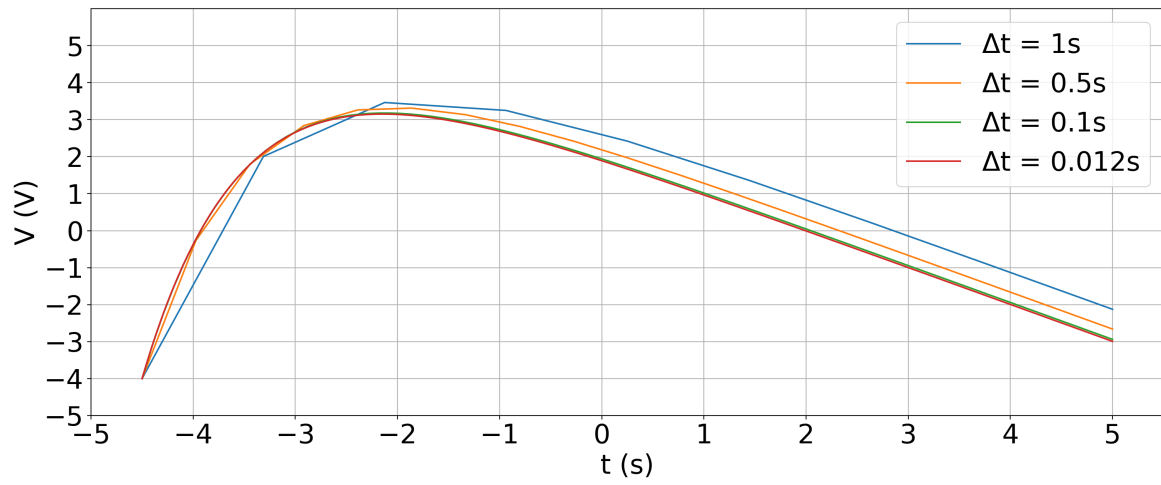


Figure 3: Approximations of the given differential equation in 2 with different methods and different step sizes Exponential-Euler Method. The different colors resemble the given timesteps visible in the legend.

4.2 Plots of the rectified 50 Hz sinusoidal input

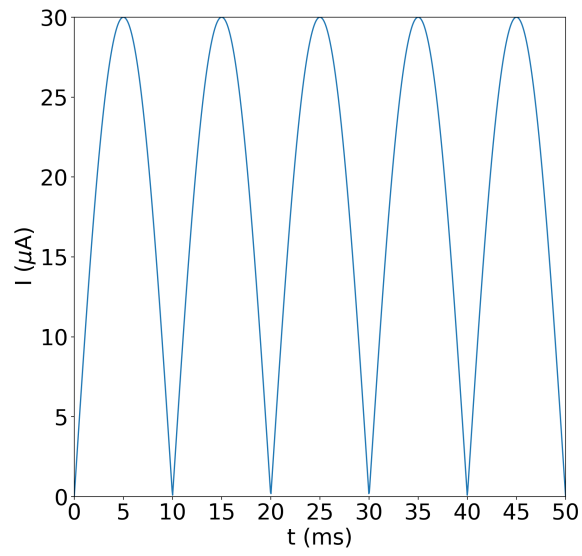


Figure 4: Rectified Sine with an amplitude of $10 \mu A$ for the model visible in Figure 8

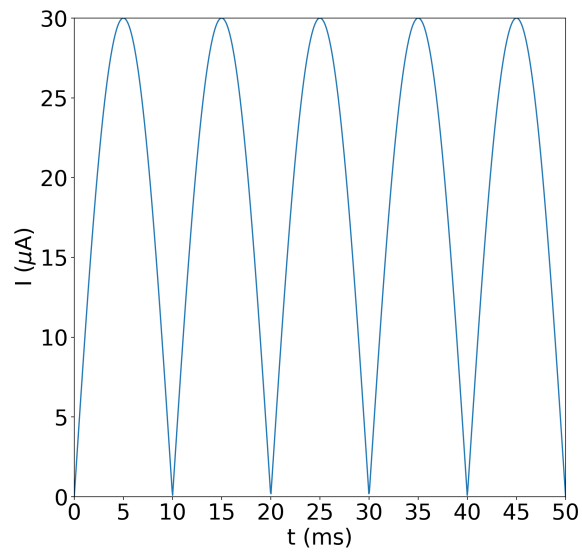


Figure 5: Rectified Sine with an amplitude of $10 \mu A$ for the model visible in Figure 9

4.3 Plots of the stimulated LIF Neuron

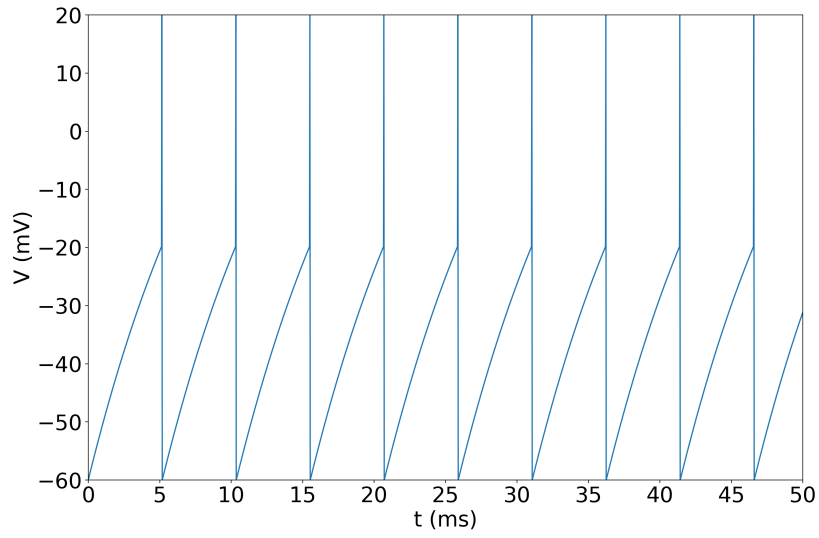


Figure 6: Results for the LIF-Model for different current inputs, for constant current input of $10 \mu\text{A}$

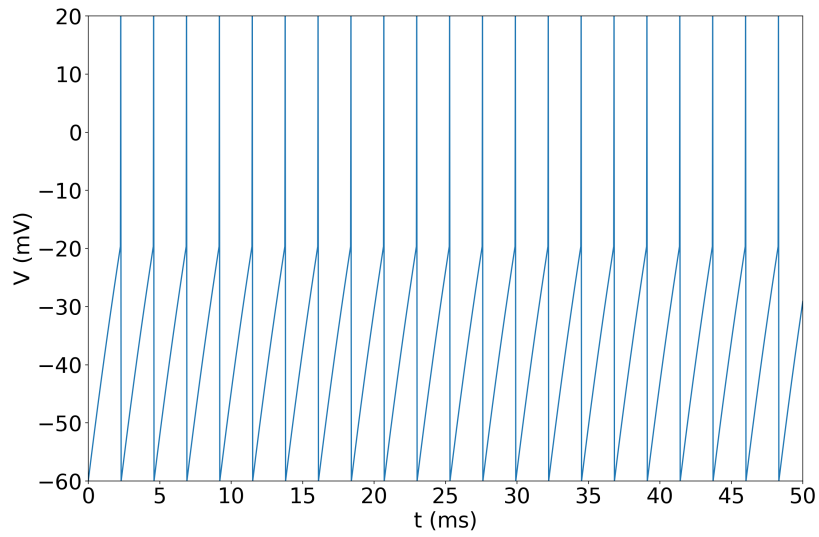


Figure 7: Results for the LIF-Model for different current inputs, for constant current input of $20 \mu\text{A}$

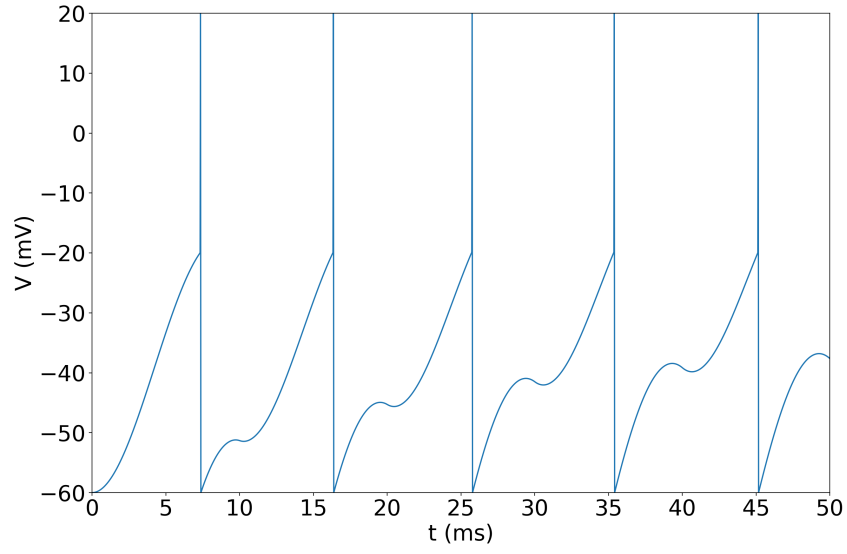


Figure 8: Results for the LIF-Model for different current inputs, for Rectified Sine-Input with an amplitude of $10 \mu\text{A}$, input signal visible in figure 4.

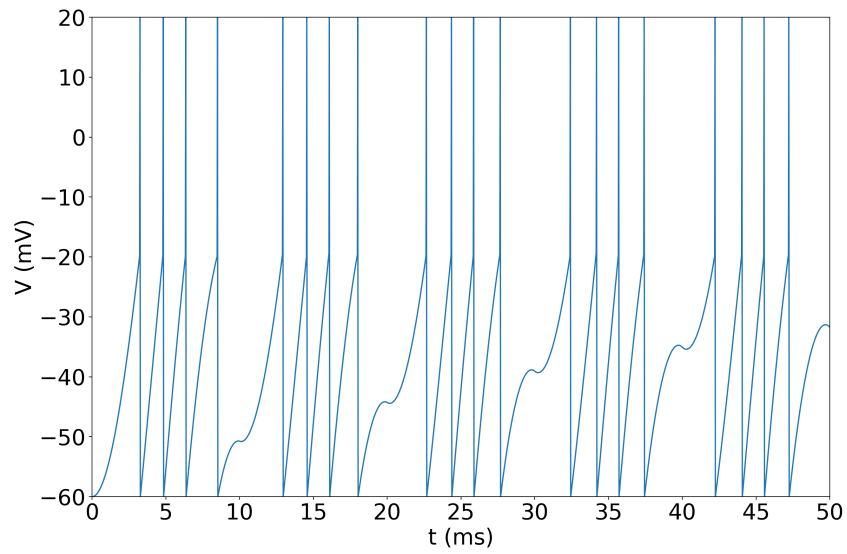


Figure 9: Results for the LIF-Model for different current inputs, for Rectified Sine-Input with an amplitude of $30 \mu\text{A}$, input signal visible in figure 5.