


TEI0003 Getting Started

Created by John Hartfiel, last modified on 18.04.2018

Table of Contents

- Overview
- Power supply
- Buttons
- LEDs
- JTAG/UART
- Reference Designs
- Notes

Overview

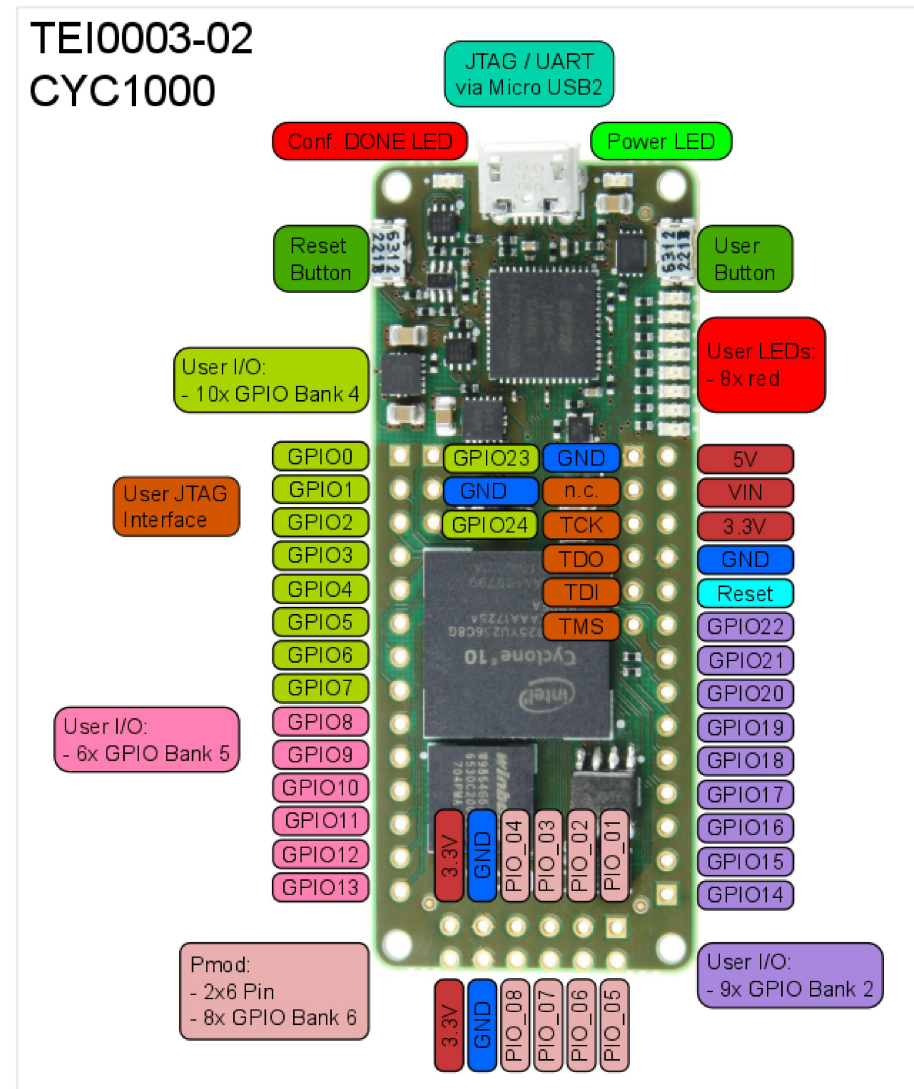

Power supply

Over Micro USB or VIN Pin (5V) possible.

Buttons

Reset Button: reset Cyclone 10 (nConfig Pin).

User Button: FPGA Pin N6

LEDs

See overview picture.