

Control for transportation vehicle & urban traffic networks

Course: Intelligent Transportation Systems (ITS)
ITS for Smart Mobility

Andres Ladino

<http://bit.ly/ITS2020-Control>
andres.ladino@univ-eiffel.fr

Lyon, 16th December 2020

Université Gustave Eiffel (UGE)

- Modeling & Characterization
 - Multi network traffic approach mode, physical, scale, criteria
 - Cooperation and autonomous vehicles CAV - platooning
 - Realtime operations Short-term traffic forecast





- Modeling & Characterization
 - Multi network traffic approach mode, physical, scale, criteria
 - Cooperation and autonomous vehicles CAV - platooning
 - Realtime operations Short-term traffic forecast
- Optimal & decision making
 - Model optimization via Dynamic control, route choice
 - Integrated & hierarchical control Tactical, operational
 - Demand management Dynamic traffic assignment

Opportunities & Partnerships


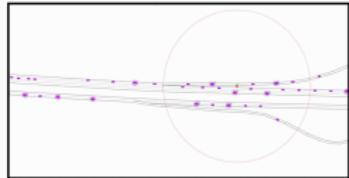


Figure 1: Traffic simulation in Symuvia

Example

- **SymuVia:** Inhouse simulator →Open Source
- **Transpolis:** Field Operational Tests
 - Autonomous vehicles
 - Controlled tests
 - C-ITS services

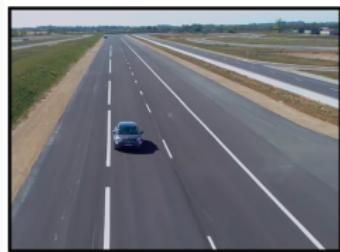


Motivation

Top-companies investing in R&D on road traffic management



Motivation

Top-companies investing in R&D on road traffic management

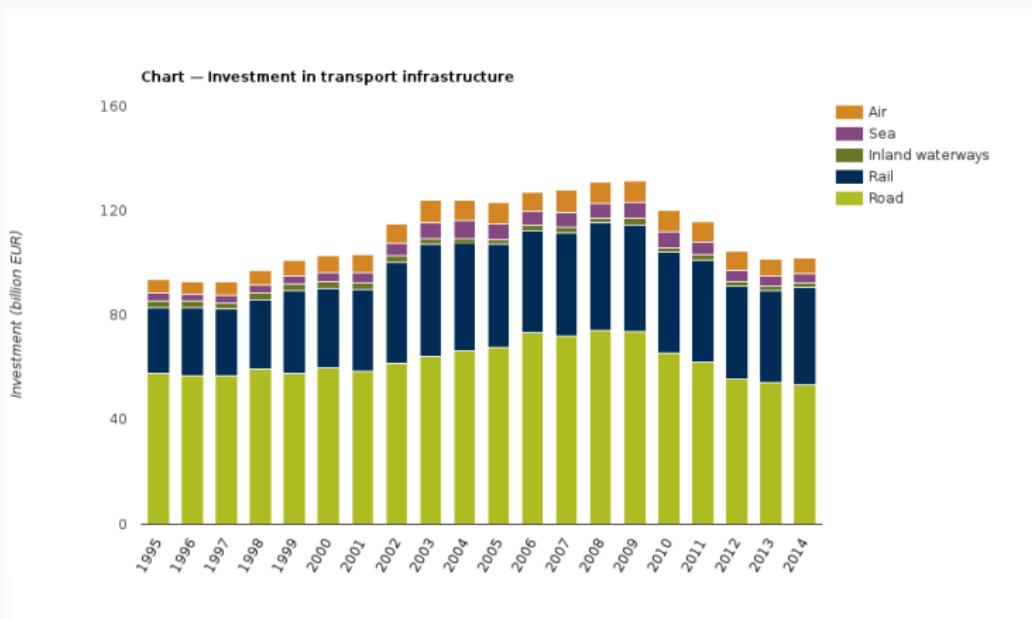

Some traffic statistics ...

Are we improving the conditions? ¹

Inrix

URBAN AREA	IMPACT RANK (2018 RANK)-	HOURS LOST IN CONGESTION (2019 RANK)-	YEAR-OVER-YEAR CHANGE-	LAST MILE SPEED (MPH) -	INCIDENT IMPACT-	BIKE -	TRANSIT -
Bogota	1 (2)	191 (1)	3%	9			
Rio de Janeiro	2 (1)	190 (2)	-5%	11			
Mexico City	3 (5)	158 (6)	2%	12			
Istanbul	4 (9)	153 (8)	6%	11			
Sao Paulo	5 (10)	152 (9)	5%	13			
Rome	6 (7)	166 (3)	1%	11			
Paris	7 (4)	165 (4)	-4%	10			

¹<https://inrix.com/scorecard/>

Some traffic statistics ...

Are we improving the conditions? ¹

Inrix

URBAN AREA	IMPACT RANK (2018 RANK)-	HOURS LOST IN CONGESTION (2019 RANK)-	YEAR-OVER-YEAR CHANGE-	LAST MILE SPEED (MPH) -	INCIDENT IMPACT-	BIKE -	TRANSIT -
Bogota	1 (2)	191 (1)	3%	9			
Rio de Janeiro	2 (1)	190 (2)	-5%	11			
Mexico City	3 (5)	158 (6)	2%	12			
Istanbul	4 (9)	153 (8)	6%	11			
Sao Paulo	5 (10)	152 (9)	5%	13			
Rome	6 (7)	166 (3)	1%	11			
Paris	7 (4)	165 (4)	-4%	10			

¹<https://inrix.com/scorecard/>

Some traffic statistics ...

Are we improving the conditions? ¹

Inrix

URBAN AREA	IMPACT RANK (2018 RANK)-	HOURS LOST IN CONGESTION (2019 RANK)-	YEAR-OVER-YEAR CHANGE-	LAST MILE SPEED (MPH) -	INCIDENT IMPACT-	BIKE -	TRANSIT -
Bogota	1 (2)	191 (1)	3%	9			
Rio de Janeiro	2 (1)	190 (2)	-5%	11			
Mexico City	3 (5)	158 (6)	2%	12			
Istanbul	4 (9)	153 (8)	6%	11			
Sao Paulo	5 (10)	152 (9)	5%	13			
Rome	6 (7)	166 (3)	1%	11			
Paris	7 (4)	165 (4)	-4%	10			

¹<https://inrix.com/scorecard/>

Some traffic statistics ...

Are we improving the conditions? ¹

Inrix

URBAN AREA	IMPACT RANK (2018 RANK)-	HOURS LOST IN CONGESTION (2019 RANK)-	YEAR-OVER-YEAR CHANGE-	LAST MILE SPEED (MPH) -	INCIDENT IMPACT-	BIKE -	TRANSIT -
Bogota	1 (2)	191 (1)	3%	9			
Rio de Janeiro	2 (1)	190 (2)	-5%	11			
Mexico City	3 (5)	158 (6)	2%	12			
Istanbul	4 (9)	153 (8)	6%	11			
Sao Paulo	5 (10)	152 (9)	5%	13			
Rome	6 (7)	166 (3)	1%	11			
Paris	7 (4)	165 (4)	-4%	10			
URBAN AREA	IMPACT RANK (2018 RANK)-	HOURS LOST IN CONGESTION (2019 RANK)-	YEAR-OVER-YEAR CHANGE-	LAST MILE SPEED (MPH) -	INCIDENT IMPACT-	BIKE -	TRANSIT -
Lyon	39 (40)	105 (35)	1%	10			


¹<https://inrix.com/scorecard/>

Motivation & Current trends...

Evolution of new technologies

Motivation & Current trends...

Evolution of new technologies

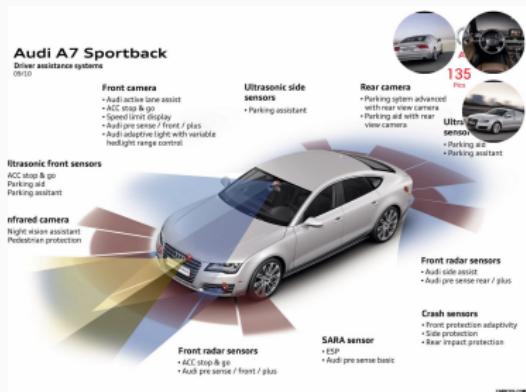


Current trends

1. Development of *Small Network Sensors*
2. From *Infrastructure towards Vehicle services*
3. Introduction of automation

Motivation & Current trends...

Evolution of new technologies

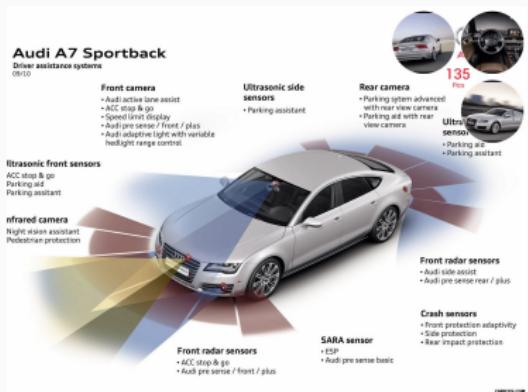

Current trends

1. Development of *Small Network Sensors*
2. From *Infrastructure towards Vehicle services*
3. Introduction of automation

Current needs

1. *Standardization: Technologies & services*
2. *Certification: Testing and regulation*
3. *Modality: Efficient network exploitation*

Big challenge...

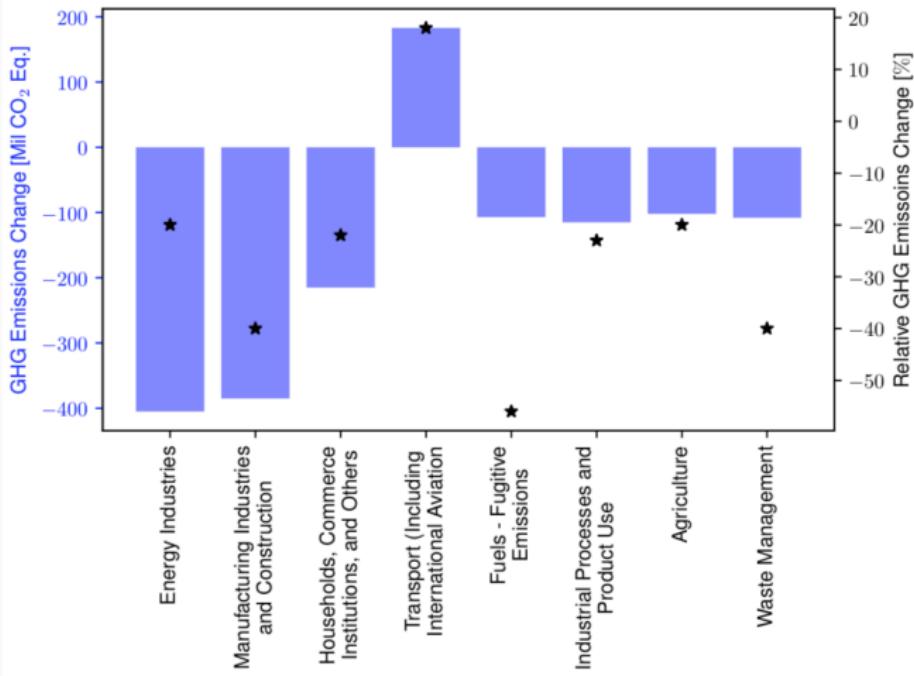


Figure 3: Green house emissions change due to transportation from 1990-2005

Big challenge...

GHG Emissions up to the date

1. From 1990-2005 the relative increase in GHG is still important
2. Policies have been adopted
EURO1-EURO6

Big challenge...

GHG Emissions up to the date

1. From 1990-2005 the relative increase in GHG is still important
2. Policies have been adopted EURO1-EURO6

On the other hand

1. *Standardization:* Technologies are reaching efficiency limits for fossil fuel
2. *Certification:* New alternative energies on the market
3. *Modality:* We understand mobility in a different way

Big challenge...

GHG Emissions up to the date

1. From 1990-2005 the relative increase in GHG is still important
2. Policies have been adopted EURO1-EURO6

On the other hand

1. *Standardization:* Technologies are reaching efficiency limits for fossil fuel
2. *Certification:* New alternative energies on the market
3. *Modality:* We understand mobility in a different way

Potential on new technologies

There is potential on new *ITS* systems that may provide new capabilities and improve efficiency leveraged by new technologies such as *data, models and automation*.

General outline

Topics for today

1. Introduction to: Automation in transportation systems.
 - Models in transportation and current technologies

General outline

Topics for today


1. Introduction to: Automation in transportation systems.
 - Models in transportation and current technologies
2. Traffic control from infrastructure point of view.
 - Control of traffic lights
 - Scalable control laws for traffic networks

General outline


Topics for today

1. Introduction to: Automation in transportation systems.
 - Models in transportation and current technologies
2. Traffic control from infrastructure point of view.
 - Control of traffic lights
 - Scalable control laws for traffic networks
3. Vehicle control to improve traffic network performance.
 - Connected vehicles and connected infrastructures
 - Vehicle platooning and vehicle automation.


Basic concepts of control



Basic concepts of control

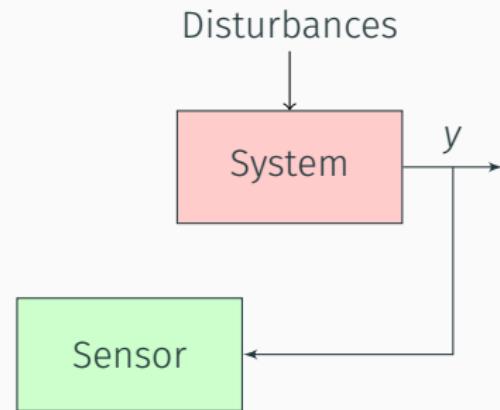


Basic concepts of control

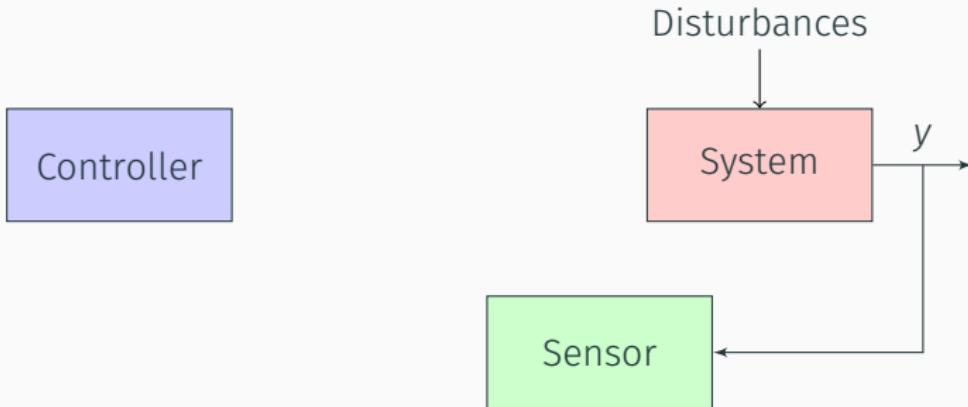

Objective

- u - Control input
 - u_a - Actuation input
 - y - Output system
- Track a particular value in the output of the system.
 - Regularize a value in the output (Stabilize).


Basic concepts of control

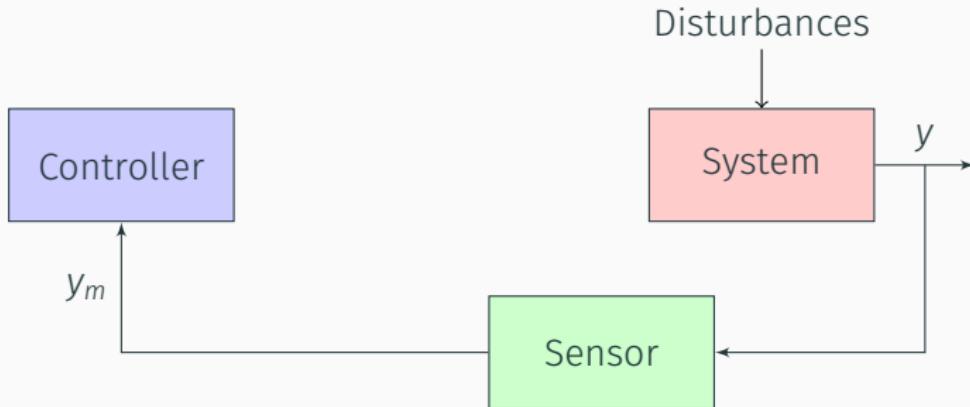

Objective

- u - Control input
 - u_a - Actuation input
 - y - Output system
- Track a particular value in the output of the system.
 - Regularize a value in the output (Stabilize).


Basic concepts of control

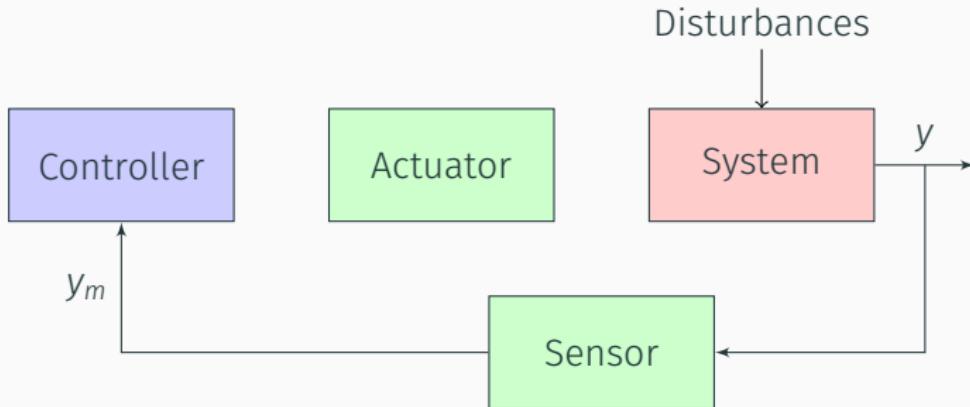

Objective

- u - Control input
 - u_a - Actuation input
 - y - Output system
- Track a particular value in the output of the system.
 - Regularize a value in the output (Stabilize).


Basic concepts of control

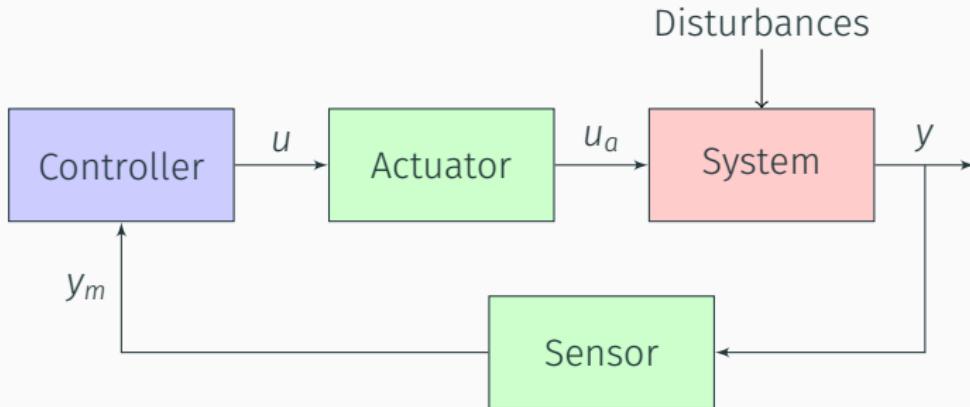


Objective

- u - Control input
- u_a - Actuation input
- y - Output system
- Track a particular value in the output of the system.
- Regularize a value in the output (Stabilize).


Control approach to traffic systems ...

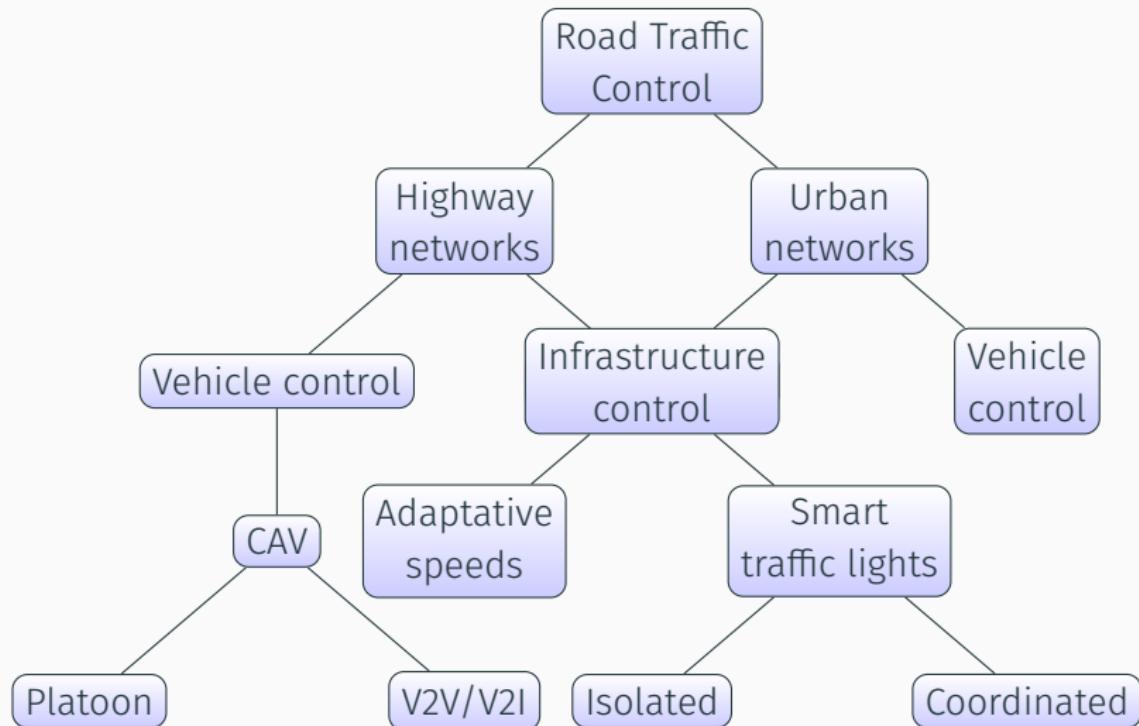

Control approach to traffic systems ...

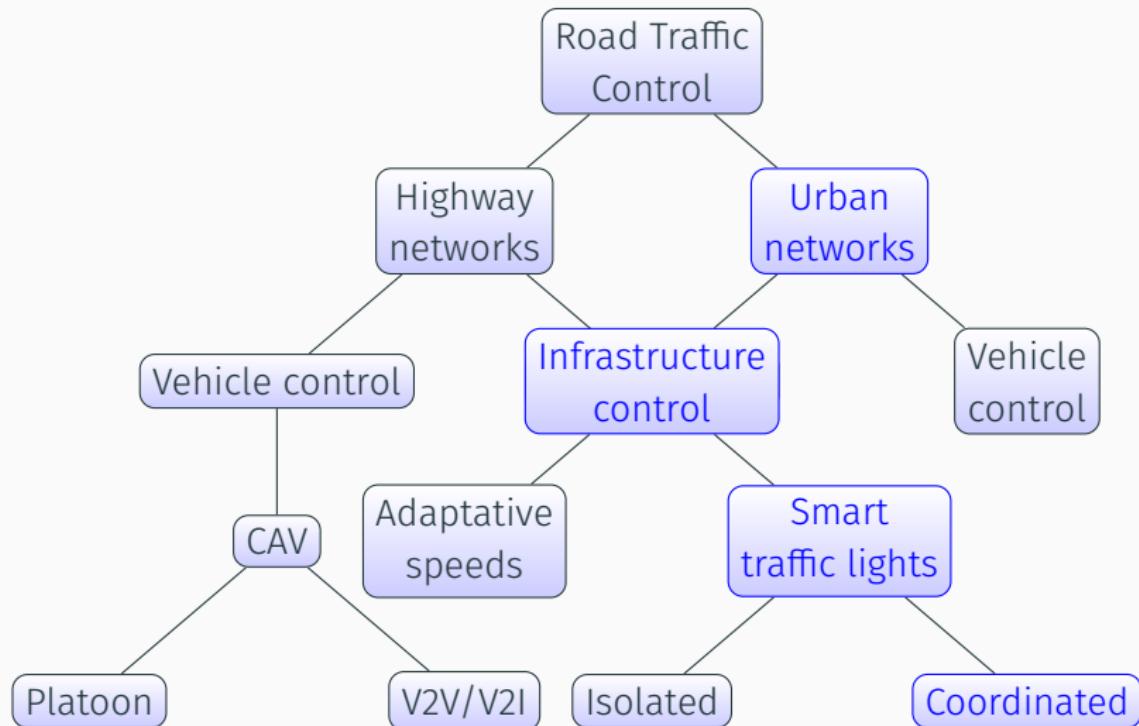

Control approach to traffic systems ...

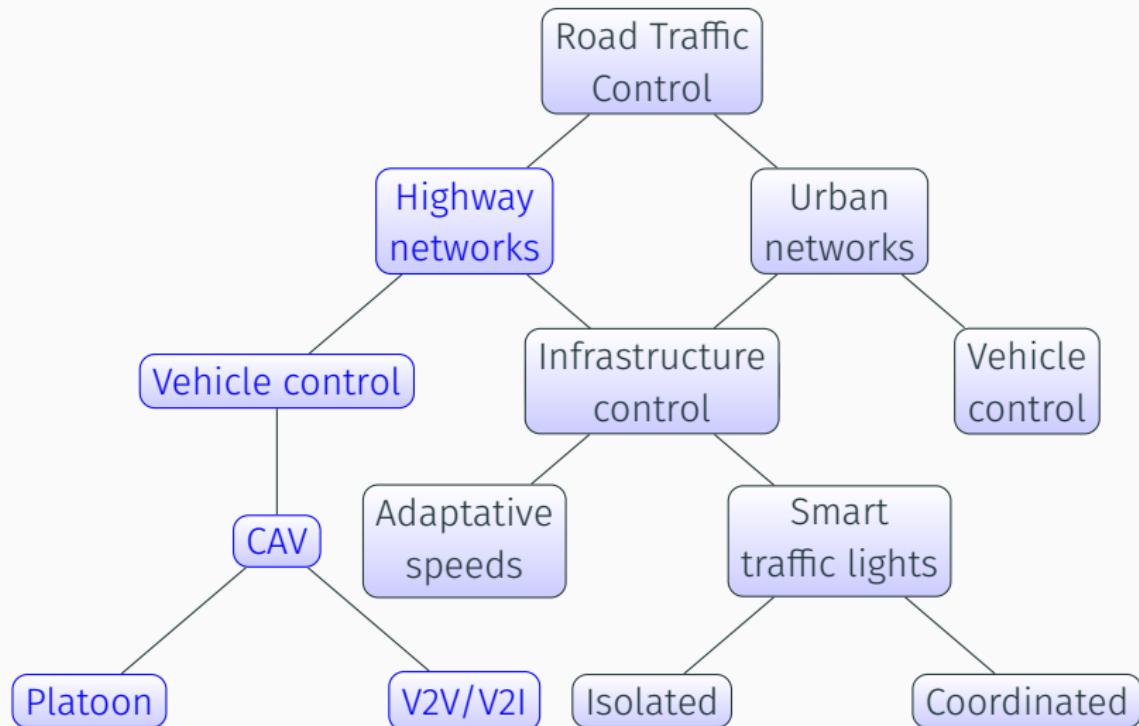

Disclaimer about today's talk

Good solutions for mobility:



Figure 4: Bikesharing



Figure 5: Carsharing



Figure 6: Ridesharing

Alternative Intelligent Transportation Systems

- Leveraged by data and incentives.
- Complex but interesting algorithms for *Dynamic traffic assignment*
- Sorry ☹ not the topic for today, but these are efficient systems from user's point of view.
- Focus of today is *single mode transport optimization*

Traffic light control

Motivation


Scope for traffic light control:

- Focus: Urban area networks.
- Objective: Improve urban traffic conditions via control of traffic light (Macroscopic approach)².
- How: Efficient and distributed optimization methods for the aforementioned problems³.

²Pietro Grandinetti, Carlos Canudas de Wit, and Federica Garin. "An efficient one-step-ahead optimal control for urban signalized traffic networks based on an averaged Cell-Transmission-Model". In: *2015 European Control Conference (ECC)*. July 2015, pp. 3478–3483.

³Pietro Grandinetti, Federica Garin, and Carlos Canudas de Wit. "Towards scalable optimal traffic control". In: *2015 54th IEEE Conference on Decision and Control (CDC)*. Oct. 2015, pp. 2175–2180.

Light control in traffic networks

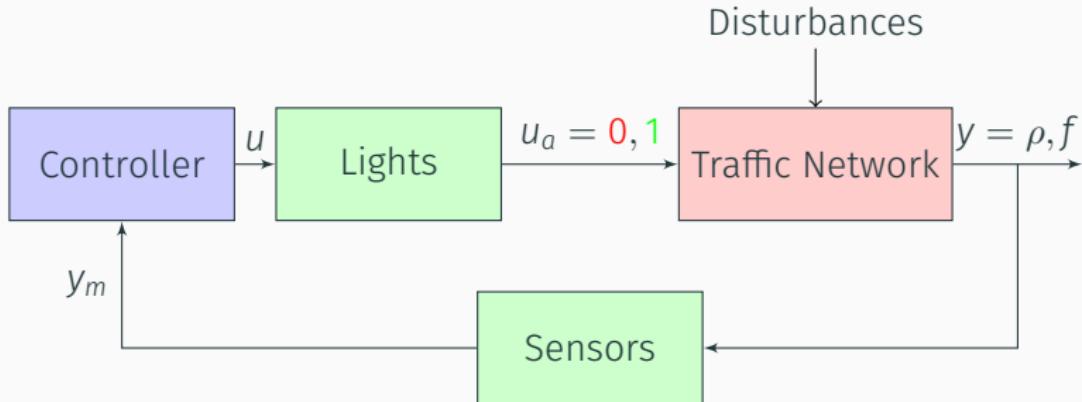


- u - Green times / Red times
- u_a - Actuation input (Green/Red)
- y - Output system (Densities, Flows)


Objective

- Alleviate congestions over the network.
- Adapt green times based on measurements.

Urban vs Highway model

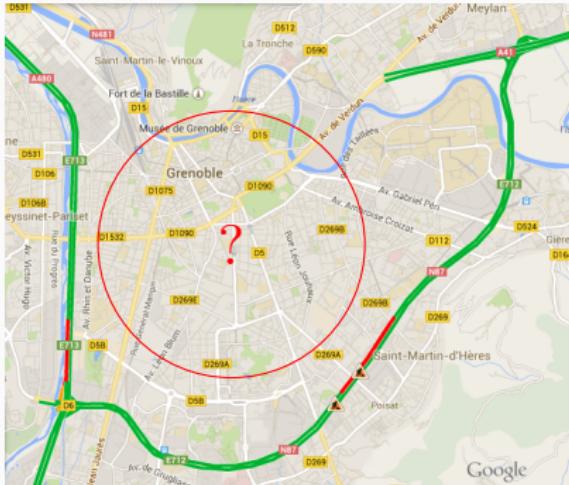

Urban vs Highway model

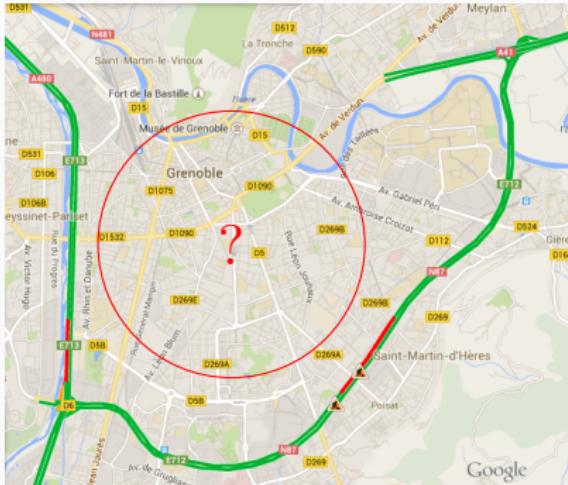

Topology gap

- Control strategies from *highways* can be *adapted* to urban cases?
- Is it possible to design control for the full network?

Traffic light modeling

Two level of complexity


- Size of the network's model
- Traffic light almost each intersection

Traffic light modeling

Two level of complexity

- Size of the network's model
- Traffic light almost each intersection

Piece-wise system representation




CTM still possible (each road is a cell) but the choice Free/Congested can give dimensional problem ($\sim 2^{\# \text{roads}}$)

Traffic light modeling

Two level of complexity


- Size of the network's model
- Traffic light almost each intersection

Piece-wise system representation



CTM still possible (each road is a cell) but the choice Free/Congested can give dimensional problem ($\sim 2^{\# \text{roads}}$)


Discontinuities in traffic signal




A traffic light is a T -periodic, discontinuous signal

$$u(t) \in \{0, 1\}, \text{ with duty cycle } \frac{1}{T} \int_0^T u(t) dt = \frac{\bar{u}}{T}$$


Traffic light control

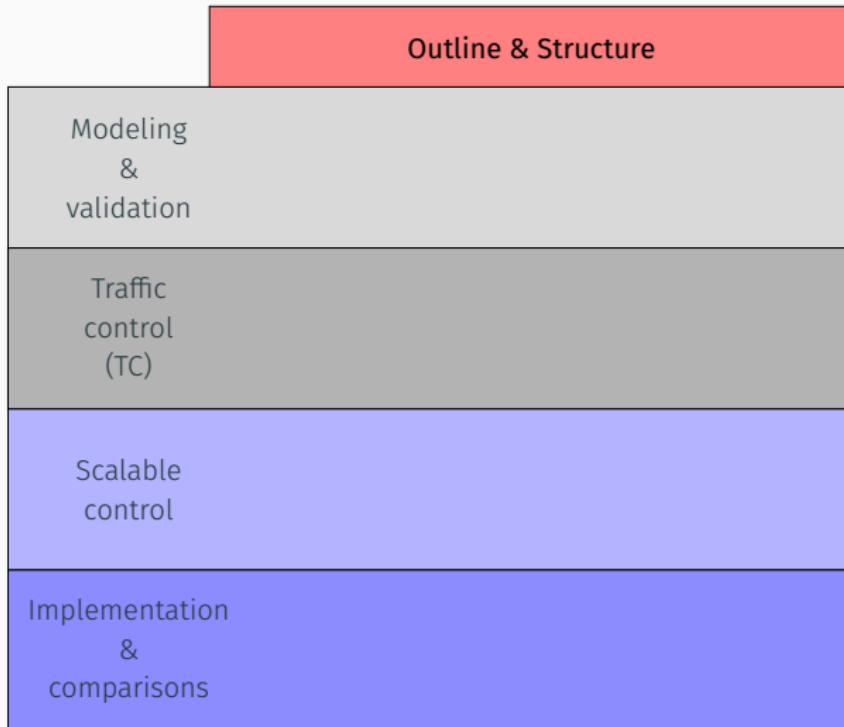


Traffic light control

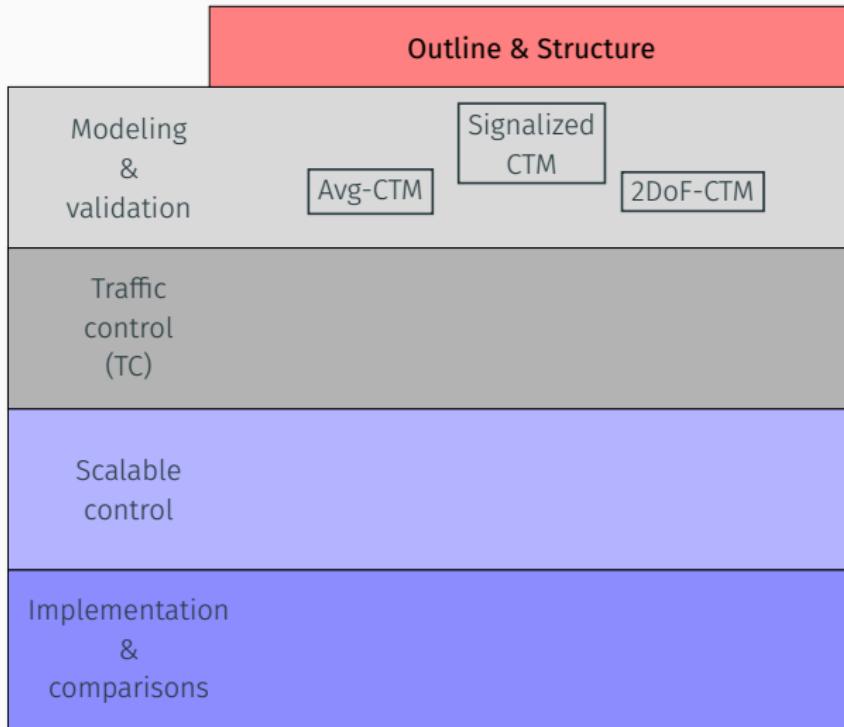


Traffic light control

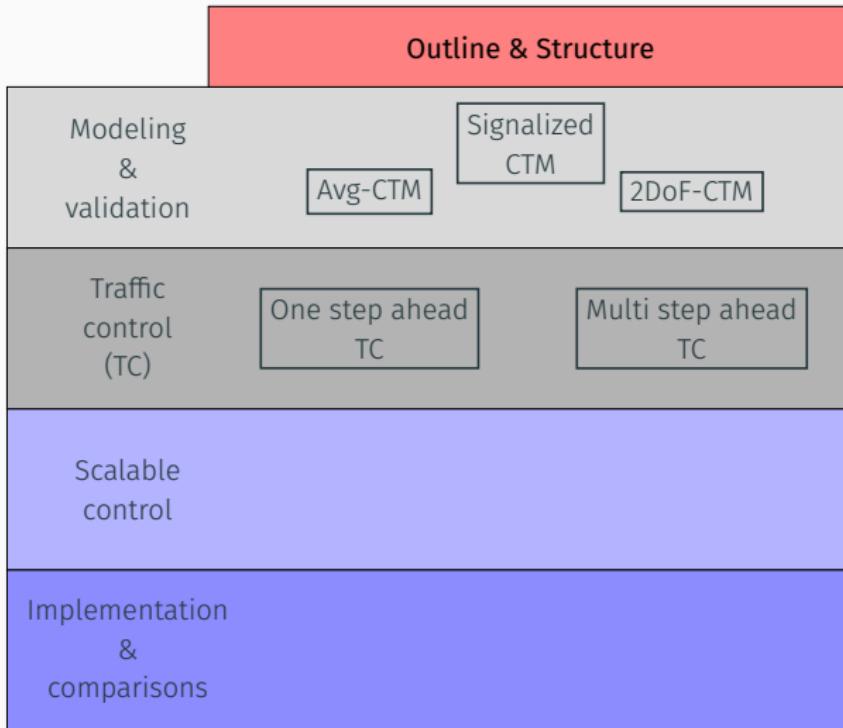


Traffic light control

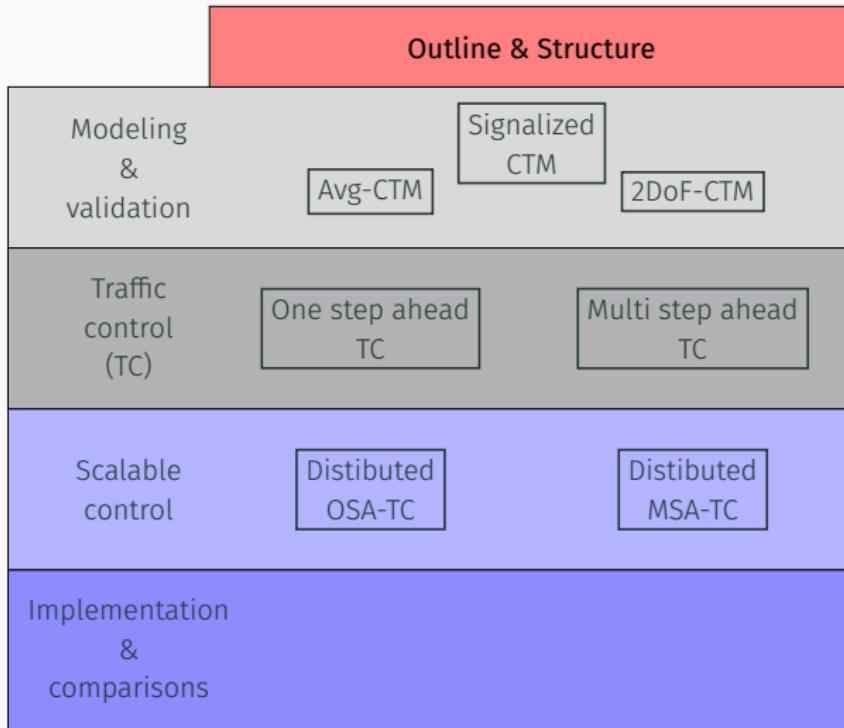

Traffic light control

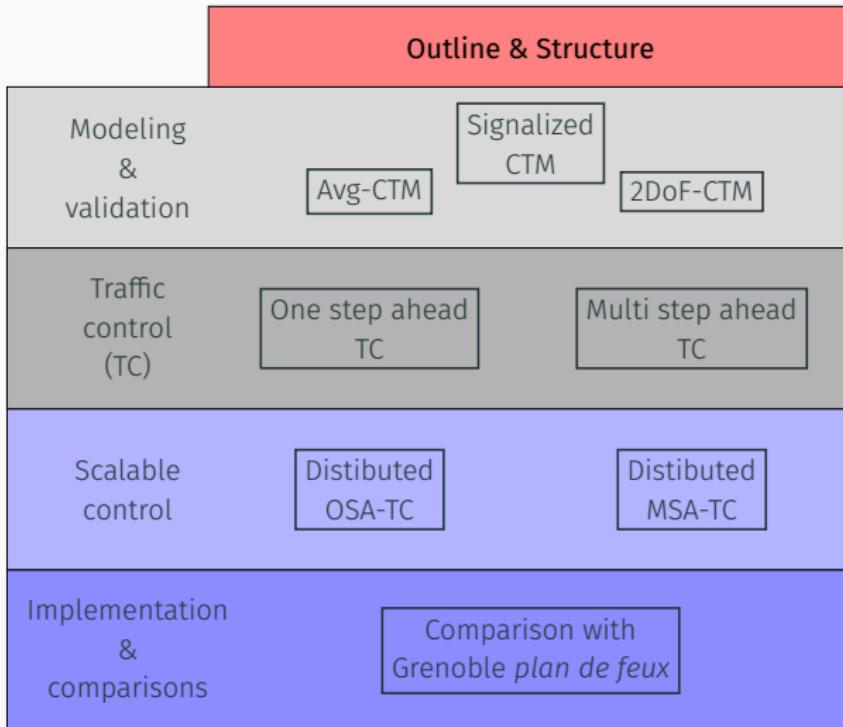

Traffic light control

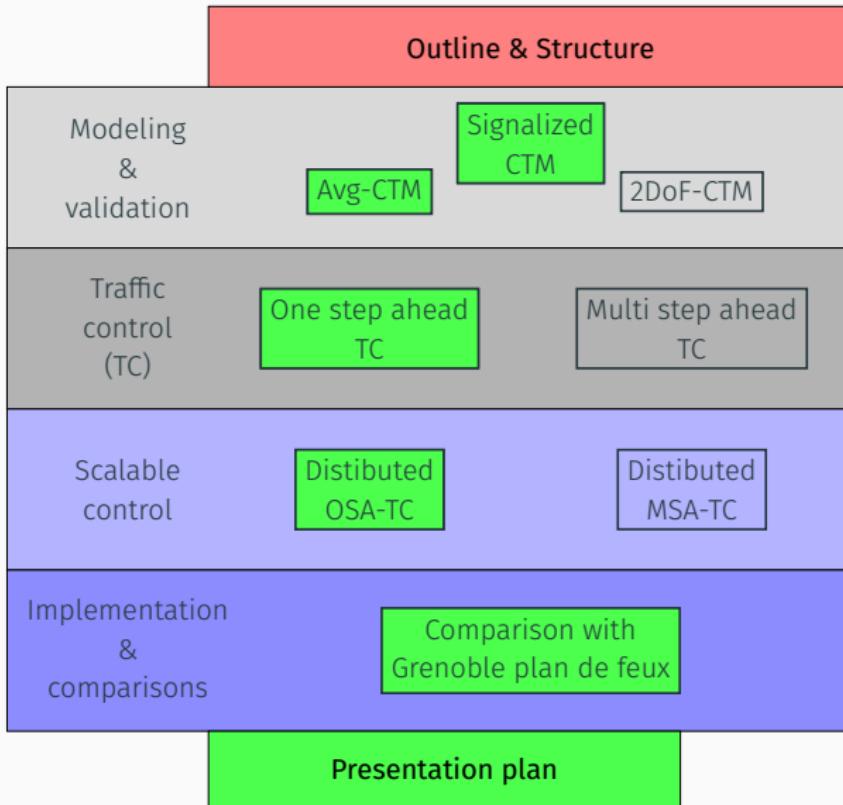

The signalized cell transmission model (S-CTM)

CTM properties:

- Macroscopic model
- Network partitioned into cells

The signalized cell transmission model (S-CTM)

CTM properties:

- Macroscopic model
- Network partitioned into cells



Notation	Value
ρ_i^{\max}	Cell i jam density
v_i	Free-flow speed
w_i	Congestion wave speed
f_i^{\max}	Capacity flow
L_i	Cell i length

The signalized cell transmission model (S-CTM)

CTM properties:

- Macroscopic model
- Network partitioned into cells

Notation	Value
ρ_i^{\max}	Cell i jam density
v_i	Free-flow speed
w_i	Congestion wave speed
f_i^{\max}	Capacity flow
L_i	Cell i length

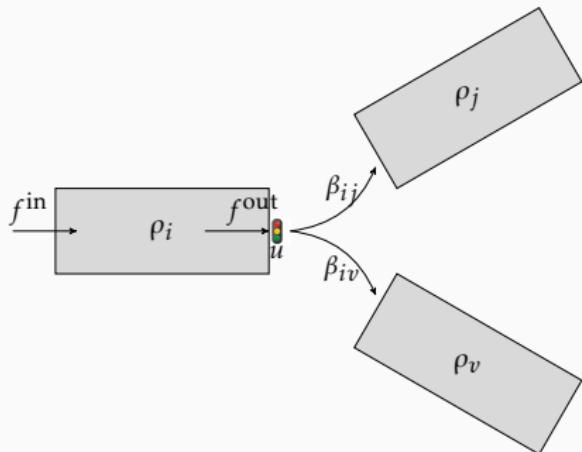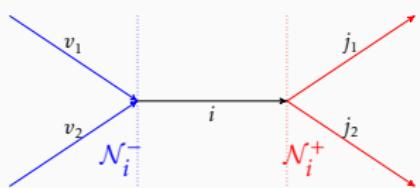


Model for urban traffic network

Demand & Supply paradigm

For a road r we define


- Demand of r the flow of vehicles that can go out from r
- Supply of r the flow of vehicles that r can receive

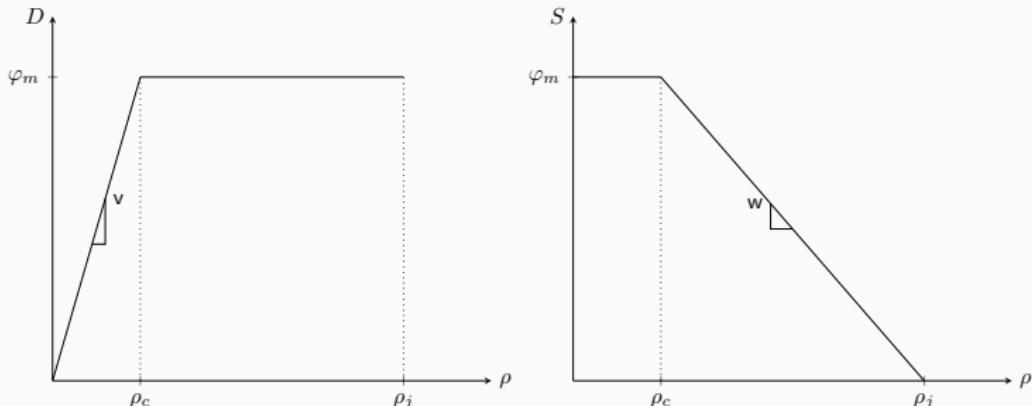

$$D_r = \min\{v\rho_r, \varphi_m\} \quad S_r = \min\{w(\rho_j - \rho), \varphi_m\}$$


Model for urban traffic network

Diverge network (Daganzo, 1994)

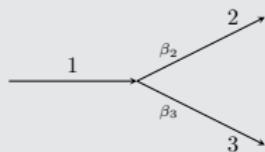

Model for urban traffic network

Diverge network (Daganzo, 1994)



$$f_1^{out} = \max \phi$$


$$\text{s.t. } \phi \leq D_1$$

$$\beta_2 \phi \leq S_2$$

$$\beta_3 \phi \leq S_3$$

Model for urban traffic network

Diverge network (Daganzo, 1994)



$$f_1^{out} = \max \phi$$

$$\text{s.t. } \phi \leq D_1$$


$$\beta_2 \phi \leq S_2$$

$$\beta_3 \phi \leq S_3$$

$$f_1^{out} = \min \left\{ D_1, \frac{S_2}{\beta_2}, \frac{S_3}{\beta_3} \right\}$$

Model for urban traffic network

Diverge network (Daganzo, 1994)



$$f_1^{out} = \max \phi$$

$$\text{s.t. } \phi \leq D_1$$

$$\beta_2 \phi \leq S_2$$

$$\beta_3 \phi \leq S_3$$

$$f_1^{out} = \min \left\{ D_1, \frac{S_2}{\beta_2}, \frac{S_3}{\beta_3} \right\}$$

Split ratio

Several different choices for the β s are possible, e.g. defining β_{ij} which express the percentage of drivers in road i that want to go in road j

The signalized cell transmission model (S-CTM)

$$\rho_i(t + T_s) = \rho_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - u_i(t) f_i^{\text{out}}(t) \right)$$

$D_i(t), S_i(t)$: demand (supply) of cell i

The signalized cell transmission model (S-CTM)

$$\rho_i(t + T_s) = \rho_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - u_i(t) f_i^{\text{out}}(t) \right)$$

$D_i(t), S_i(t)$: demand (supply) of cell i

f^{in} weighted sum of f^{out} $\longrightarrow f_i^{\text{in}}(t) = \sum_{j \in \mathcal{N}_i^-} \beta_{ji} f_j^{\text{out}}(t) u_j(t)$

The signalized cell transmission model (S-CTM)

$$\rho_i(t + T_s) = \rho_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - u_i(t) f_i^{\text{out}}(t) \right)$$

$D_i(t), S_i(t)$: demand (supply) of cell i

f^{in} weighted sum of f^{out} $\longrightarrow f_i^{\text{in}}(t) = \sum_{j \in \mathcal{N}_i^-} \beta_{ji} f_j^{\text{out}}(t) u_j(t)$

f^{out} with FIFO policy $\longrightarrow f_i^{\text{out}}(t) = \min \left(D_i(t), \left\{ \frac{S_j(t)}{\beta_{ij}} \right\}_{j \in \mathcal{N}_i^+} \right)$

The signalized cell transmission model (S-CTM)

$$\rho_i(t + T_s) = \rho_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - u_i(t) f_i^{\text{out}}(t) \right)$$

$D_i(t), S_i(t)$: demand (supply) of cell i

f^{in} weighted sum of f^{out} $\longrightarrow f_i^{\text{in}}(t) = \sum_{j \in \mathcal{N}_i^-} \beta_{ji} f_j^{\text{out}}(t) u_j(t)$


f^{out} with FIFO policy $\longrightarrow f_i^{\text{out}}(t) = \min \left(D_i(t), \left\{ \frac{S_j(t)}{\beta_{ij}} \right\}_{j \in \mathcal{N}_i^+} \right)$

$$f_i^{\text{out}}(t) = \max \phi$$

subj. to: $\phi \leq D_i(t)$


$$\beta_{ij} \phi \leq S_j(t) \quad \forall j \in \mathcal{N}_i^+$$

Diverge network




$$\dot{\rho}_1 = \frac{\cdot}{L_1}$$

Diverge network



$$\dot{\rho}_1 = \frac{f_1^{in} - f_1^{out}}{L_1}$$


Diverge network



$$\dot{\rho}_1 = \frac{f_1^{in} - f_1^{out}}{L_1} u_1(t)$$


S-CTM - Example

Diverge network



$$\dot{\rho}_1 = \frac{f_1^{in} - f_1^{out} u_1(t)}{L_1}$$


4-roads intersection

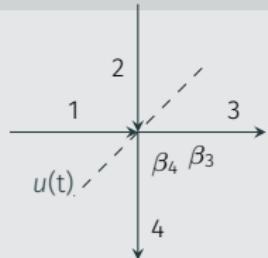

$$\dot{\rho}_3 = \frac{1}{L_3} \left(f_3^{in} - f_3^{out} \right) = \frac{\left((\quad + \quad) - f_3^{out} \right)}{L_3}$$


S-CTM - Example

Diverge network



$$\dot{\rho}_1 = \frac{f_1^{in} - f_1^{out}}{L_1} u_1(t)$$


4-roads intersection



$$\dot{\rho}_3 = \frac{1}{L_3} \left(f_3^{in} - f_3^{out} \right) = \frac{\left((f_1^{out} \beta_{13} + f_2^{out} \beta_{23}) - f_3^{out} \right)}{L_3}$$


S-CTM - Example

Diverge network



$$\dot{\rho}_1 = \frac{f_1^{in} - f_1^{out} u_1(t)}{L_1}$$

4-roads intersection



$$\dot{\rho}_3 = \frac{1}{L_3} \left(f_3^{in} - f_3^{out} \right) = \frac{\left((u_1(t) f_1^{out} \beta_{13} + (1-u_1(t)) f_2^{out} \beta_{23}) - f_3^{out} \right)}{L_3}$$

Model simplification

Why simplification/approximation ?

- To have a more scalable model (thanks to continuous instead of binary function)
- To include duty cycle as a new variable (towards control application)

Model simplification


Why simplification/approximation ?

- To have a more scalable model (thanks to continuous instead of binary function)
- To include duty cycle as a new variable (towards control application)

Store & forward method (Aboudolas et al., 2008)

Provided that spills are avoided (Demand & Supply paradigm) a flow f becomes

$$f = \begin{cases} 0 & \text{if } u(t) = 0 \\ \varphi & \text{otherwise} \end{cases}$$

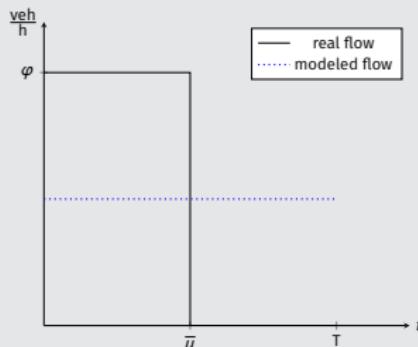

The average cell transmission model (Avg-CTM)


Model reduction

Can the binary behavior of the S-CTM be simplified?

The average cell transmission model (Avg-CTM)

Model reduction

Can the binary behavior of the S-CTM be simplified?

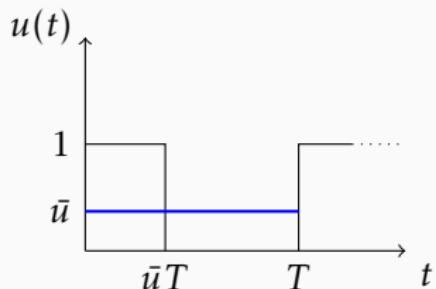


Compute the average value

$$\bar{u}_i(t) = \frac{1}{T/T_s} \sum_{k=1}^{T/T_s} u_i(t + kT_s)$$

The average cell transmission model (Avg-CTM)

Model reduction

Can the binary behavior of the S-CTM be simplified?

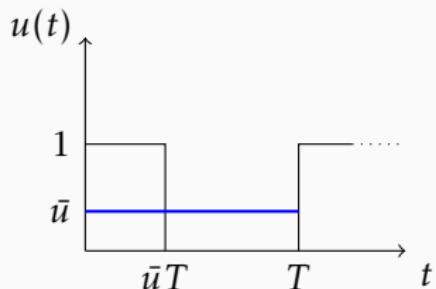

Compute the average value


$$\bar{u}_i(t) = \frac{1}{T/T_s} \sum_{k=1}^{T/T_s} u_i(t + kT_s)$$

$$\bar{\rho}_i(t + T_s) = \bar{\rho}_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - \bar{u}_i(t) f_i^{\text{out}}(t) \right)$$

The average cell transmission model (Avg-CTM)

Model reduction

Can the binary behavior of the S-CTM be simplified?

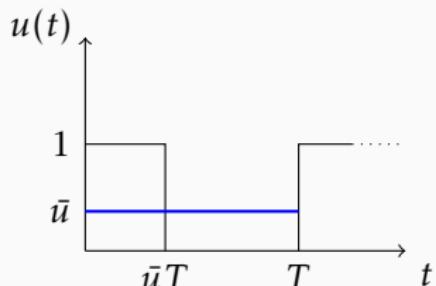

Compute the average value

$$\bar{u}_i(t) = \frac{1}{T/T_s} \sum_{k=1}^{T/T_s} u_i(t + kT_s)$$


$$\bar{\rho}_i(t + T_s) = \bar{\rho}_i(t) + \frac{T_s}{L_i} \left(f_i^{\text{in}}(t) - \bar{u}_i(t) f_i^{\text{out}}(t) \right)$$

subj. to constraints from the S-CTM

$$\forall i \in \mathcal{R} \setminus \mathcal{R}^{\text{in}}, \forall t \in \mathbb{N}_+ \quad \sum_{j \in \mathcal{N}_i^-} \bar{u}_j(t) \leq 1.$$

Note: $\mathcal{R} \setminus \mathcal{R}^{\text{in}}$ denote the set of *internal roads* in the network.

Avg-CTM: Example

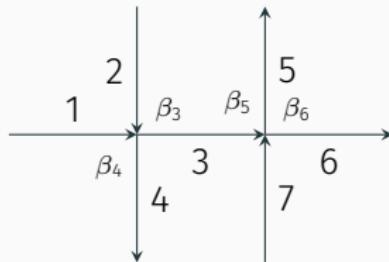


$$\frac{L_3}{T_s}(\bar{\rho}_3^+ - \bar{\rho}_3^-) =$$

Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM: Example

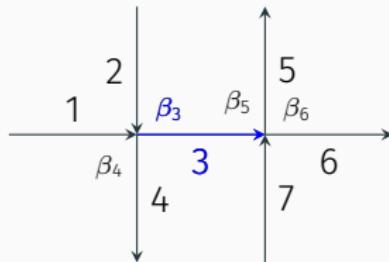


$$\frac{L_3}{T_s} (\bar{\rho}_3^+ - \bar{\rho}_3^-) = f_3^{in} - \bar{u}_3 f_3^{out} =$$

Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM: Example

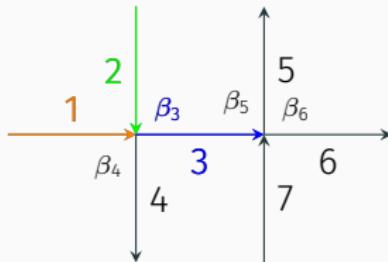


$$\frac{L_3}{T_s}(\bar{\rho}_3^+ - \bar{\rho}_3^-) = f_3^{in} - \bar{u}_3 f_3^{out} = \bar{u}_1 \beta_{13} f_1^{out} + (1 - \bar{u}_1) \beta_{23} f_2^{out} - \bar{u}_3 f_3^{out} =$$

Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM: Example

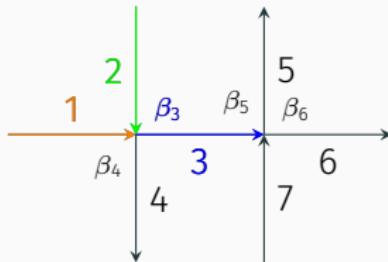


$$\frac{L_3}{T_s} (\bar{\rho}_3^+ - \bar{\rho}_3^-) = f_3^{in} - \bar{u}_3 f_3^{out} = \bar{u}_1 \beta_{13} f_1^{out} + (1 - \bar{u}_1) \beta_{23} f_2^{out} - \bar{u}_3 f_3^{out} = \\ = \bar{u}_1 \beta_{13} \min \left\{ D_1, \frac{S_3}{\beta_{13}}, \frac{S_4}{\beta_{14}} \right\}$$

Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM: Example

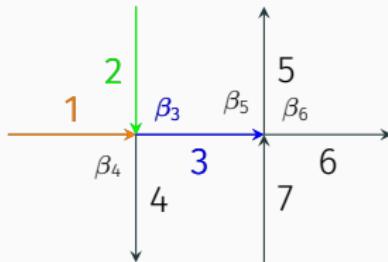


$$\begin{aligned} \frac{L_3}{T_s} (\bar{\rho}_3^+ - \bar{\rho}_3^-) &= f_3^{in} - \bar{u}_3 f_3^{out} = \bar{u}_1 \beta_{13} f_1^{out} + (1 - \bar{u}_1) \beta_{23} f_2^{out} - \bar{u}_3 f_3^{out} = \\ &= \bar{u}_1 \beta_{13} \min \left\{ D_1, \frac{S_3}{\beta_{13}}, \frac{S_4}{\beta_{14}} \right\} + (1 - \bar{u}_1) \beta_3 \min \left\{ D_2, \frac{S_3}{\beta_{23}}, \frac{S_4}{\beta_{24}} \right\} \end{aligned}$$

Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM: Example


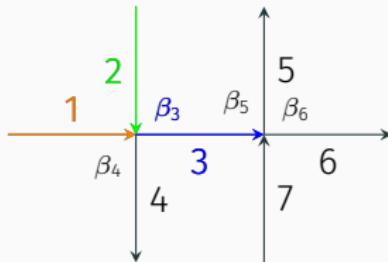


$$\begin{aligned} \frac{L_3}{T_s} (\bar{\rho}_3^+ - \bar{\rho}_3^-) &= f_3^{in} - \bar{u}_3 f_3^{out} = \bar{u}_1 \beta_{13} f_1^{out} + (1 - \bar{u}_1) \beta_{23} f_2^{out} - \bar{u}_3 f_3^{out} = \\ &= \bar{u}_1 \beta_{13} \min \left\{ D_1, \frac{S_3}{\beta_{13}}, \frac{S_4}{\beta_{14}} \right\} + (1 - \bar{u}_1) \beta_3 \min \left\{ D_2, \frac{S_3}{\beta_{23}}, \frac{S_4}{\beta_{24}} \right\} \\ &\quad - \bar{u}_2 \min \left\{ D_3, \frac{S_5}{\beta_5}, \frac{S_6}{\beta_6} \right\} \end{aligned}$$



Consistency of the model

- Total outflow never bigger than inflow
- Inflow/outflow respect the Demand & Supply paradigm

Avg-CTM – Macroscopic validation

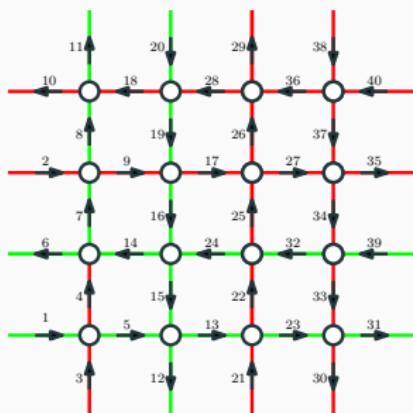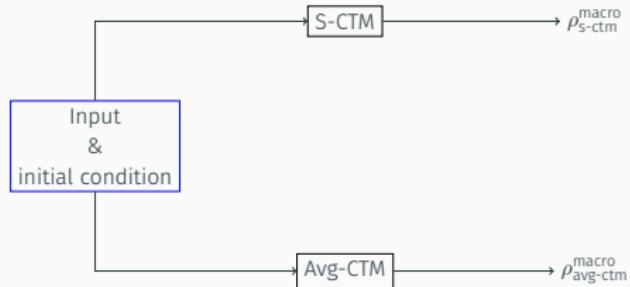

Results – Macroscopic validation

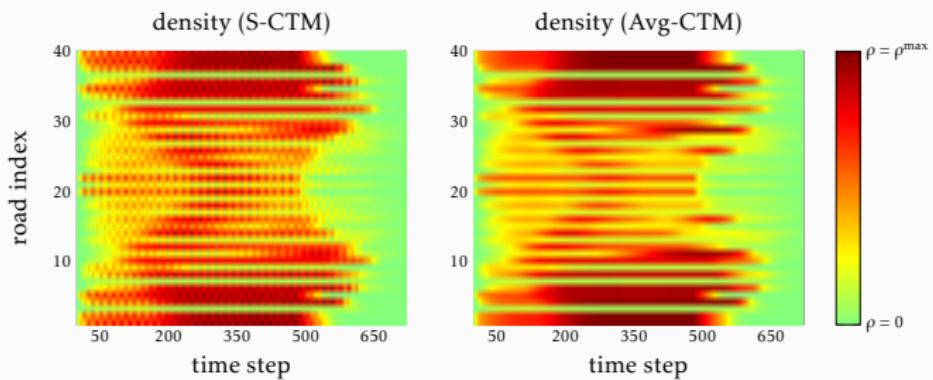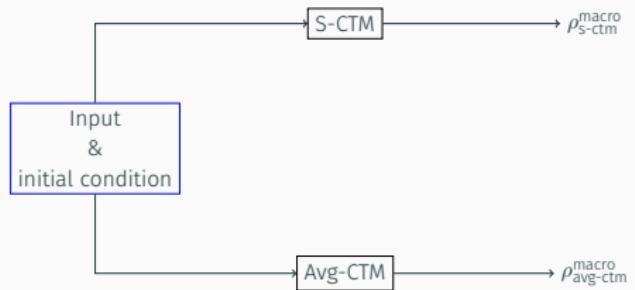


S-CTM – Microscopic validation

Validation objective

How close is the signalized CTM to a realistic behavior (e.g., microscopic models)?



S-CTM – Microscopic validation

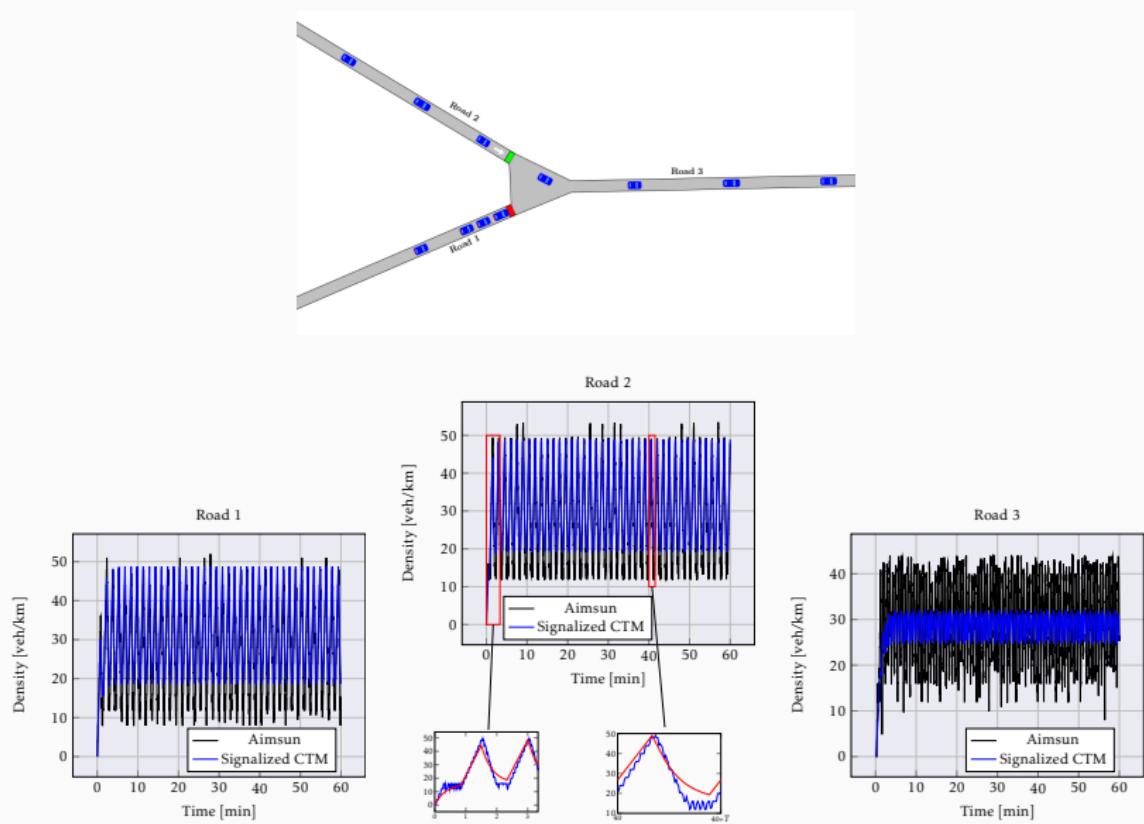

Comments

- The intrinsic complexity of the most descriptive traffic models (microscopic) makes them unsuitable for control synthesis

Comments

- The intrinsic complexity of the most descriptive traffic models (microscopic) makes them unsuitable for control synthesis
- We rely on macroscopic representations, starting off with the CTM and extending it to account for signalized intersections (S-CTM)

Comments

- The intrinsic complexity of the most descriptive traffic models (microscopic) makes them unsuitable for control synthesis
- We rely on macroscopic representations, starting off with the CTM and extending it to account for signalized intersections (S-CTM)
- The binary dynamics of traffic lights can be approximated with an average trajectory (Avg-CTM) that proves in practice to be a good approximation of the former

Comments

- The intrinsic complexity of the most descriptive traffic models (microscopic) makes them unsuitable for control synthesis
- We rely on macroscopic representations, starting off with the CTM and extending it to account for signalized intersections (S-CTM)
- The binary dynamics of traffic lights can be approximated with an average trajectory (Avg-CTM) that proves in practice to be a good approximation of the former
- The Avg-CTM is a smoother model, suitable for control design with duty cycle as control variables

Comments

- The intrinsic complexity of the most descriptive traffic models (microscopic) makes them unsuitable for control synthesis
- We rely on macroscopic representations, starting off with the CTM and extending it to account for signalized intersections (S-CTM)
- The binary dynamics of traffic lights can be approximated with an average trajectory (Avg-CTM) that proves in practice to be a good approximation of the former
- The Avg-CTM is a smoother model, suitable for control design with duty cycle as control variables

Remaining question

How to design a control for such a model?

Control history

- 1772 - Manual of traffic flow control
- 1866 - Heritage from railway systems
- 1960 - Driver Aided Information and Routing (DAIR)
- 1990 - Loop detectors + Message signs
- 1991 - ALINEA
- 2000 - Hierarchical control
- 2010+ - Vehicle focus/ MAAS



Control history

- 1772 - Manual of traffic flow control
- 1866 - Heritage from railway systems
- 1960 - Driver Aided Information and Routing (DAIR)
- 1990 - Loop detectors + Message signs
- 1991 - ALINEA
- 2000 - Hierarchical control
- 2010+ - Vehicle focus/ MAAS



TODAY'S COMPLEX ROADWAYS, increased vehicle speeds, and heavy traffic intensity the driver's need for frequent directions and information. DAIR meets this need for increased safety and driving enjoyment with a simple, low-cost communications system. Features include two-way radio communication, a display panel with warnings to supplement upcoming traffic signs, messages about the road ahead, and an in-car route direction indicator.

Picture yourself on a long, lonely segment of highway. It's a rainy night, and you're trying to stretch your gasoline to the next service station.

Sure enough, the engine begins to sputter. You coast to the shoulder and stop. Your wife, who suggested a stop at the last town, gives you the special look she saves for such occasions.



It's a bad situation at best. But if the car is equipped with GMR DAIR, you simply dial a series of numbers on a small instrument panel. The message is received

Highway Communications for Safety



The Visual Sign Minder alerts Clark Quinn with a "beep" as it repeats an upcoming Stop sign on the display panel inside the car. The inset shows the panel with all features lighted for a better view. The DAIR console fits between the seat and the dashboard next to the driver.

Control objective

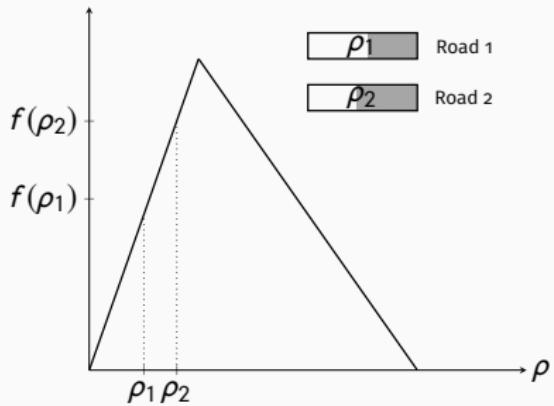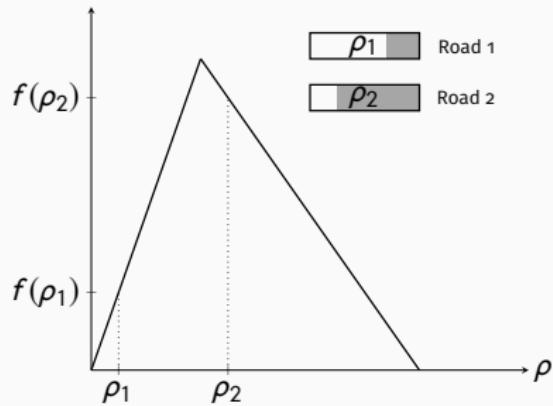

Objectives of u

- Maximize the throughput of the network.
- Homogenize the use of the network (when possible)

Traffic performance metrics

Total travel distance:

Full amount of distance travelled by all vehicles in the network

$$\text{TTD}(t) = \sum_{k=0}^{\lfloor t/T_s \rfloor} \sum_{i \in \mathcal{R}} f_i(kT_s)$$

Density balancing

Notion on how uniformly vehicles spread in the network. Ideally *uniform* vehicle distribution.

$$\text{Bal}(t) = \sum_{k=0}^{\lfloor t/T_s \rfloor} \sum_{i \in \mathcal{R}} \sum_{j \in \mathcal{N}_i^+} (\rho_i(kT_s) - \rho_j(kT_s))^2 = \sum_{k=0}^{\lfloor t/T_s \rfloor} \rho'(kT_s) \mathcal{L} \rho(kT_s)$$

where

$$\mathcal{L}_{ii} = |\mathcal{N}_i|, \mathcal{L}_{ij} = \begin{cases} -1 & \text{if } j \in \mathcal{N}_i \\ 0 & \text{elsewhere.} \end{cases}$$

Traffic signal regularization

This intends to reduce strong changes in the control cycle of the traffic signal.

$$R(\bar{u}(t, T)) = \|\bar{u}(t) - \bar{u}(t - T)\|_2^2$$

Note: T represents the full signal cycle period.

Other traffic indicators:


- Service of demand
- Total travel time
- Queues length
- Stop time

Tools to improve traffic indicators

Optimization

In order to optimize the *cost* $f(x)$,
the value of x should be found,
while respecting the constraints

$$\begin{aligned} x^* &= \min_x f(x) \\ \text{s.t. } &x \geq 0.5 \end{aligned}$$

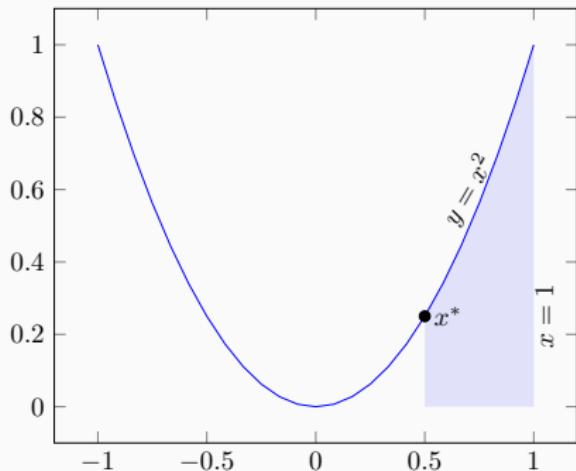


Tools to improve traffic indicators

Optimization

In order to optimize the *cost* $f(x)$,
the value of x should be found,
while respecting the constraints

$$\begin{aligned}x^* &= \min_x f(x) \\ \text{s.t. } &x \geq 0.5\end{aligned}$$

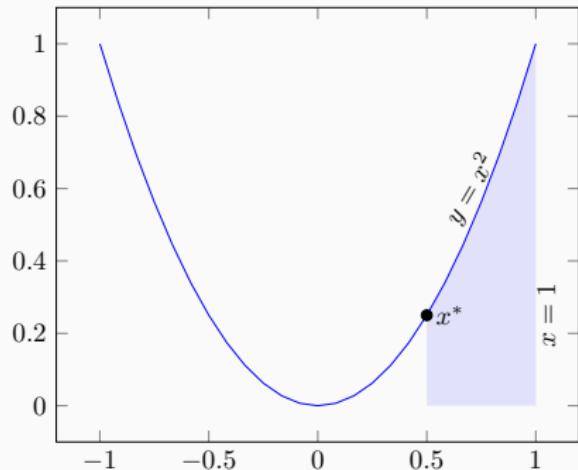


Optimal criteria

$$\min_{\bar{u}} Bal(\bar{u}(t)) - TTD(\bar{u}(t)) + R(\bar{u}(t, T))$$

Tools to improve traffic indicators

Design & Constraints

- Duty cycle \bar{u} as control variable
- Maximize network throughput + minimize the balance
- Model-based predictions computed by using the Avg-CTM

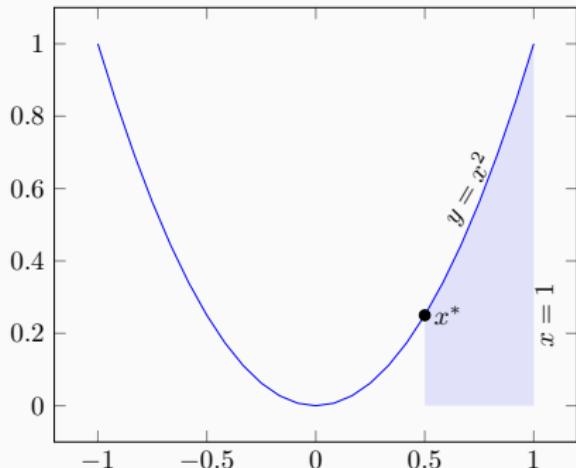

Optimal criteria

$$\min_{\bar{u}} \text{Bal}(\bar{u}(t)) - \text{TTD}(\bar{u}(t)) + R(\bar{u}(t, T))$$

Control problem formulation

The traffic signal control problem then consists in finding a solution to the following optimization problem:

$$\min_{\bar{u}} \quad \sum_{k=1}^K \left(k_{\text{bal}} \bar{\rho}'(t + kT_s) \mathcal{L} \bar{\rho}(t + kT_s) - k_{\text{ttd}} \sum_{i \in \mathcal{R}} f_i(t + kT_s) \right) + \|\bar{u} - \bar{u}(t - T)\|_2^2$$

subj. to: $\forall i, \forall t \quad 0 \leq \bar{u}_i(t) \leq 1$

$$\sum_{j \in \mathcal{N}_i^-} \bar{u}_j(t) \leq 1.$$

Control problem characteristics

- Minimize density balancing
- Maximize total travel distance
- A convex formulation is achievable when $K = 1$

Comments

Observations

- Pros:
 - The relaxed formulation is provably *equivalent* to the original problem
 - Convex problems are generally considered "easy" to solve
- Cons:
 - Although efficient, the solution does not scale well with the size of the network

Remaining question

How to design scale the control to large traffic networks?

Comments

Observations

- Pros:
 - The relaxed formulation is provably *equivalent* to the original problem
 - Convex problems are generally considered "easy" to solve
- Cons:
 - Although efficient, the solution does not scale well with the size of the network

Remaining question


How to design scale the control to large traffic networks?

Scalability requirements

- Decomposition in subproblems
- Communication of efficient information
- Iterative and distributed algorithm
- Optimality of the distributed algorithm

Scalability - Communication graph

Minimum information required to determine the solution of a single traffic light \bar{u}_i



Set of roads that can "talk" to i :

$$\mathcal{S}_i = \mathcal{N}_i^- \cup \mathcal{N}_i^+ \cup \mathcal{I}_i,$$

where

$$\mathcal{I}_i = \{q : \mathcal{N}_q^+ \equiv \mathcal{N}_i^+\}.$$

Why?

\mathcal{N}_i^- and \mathcal{N}_i^+ are needed for density prediction. \mathcal{I}_i is needed for constraints over traffic lights.

Scalability - Problem decomposition

Problem set-up (e.g., problem i):

$$\begin{aligned} \min_{\bar{u}} \quad & \sum_{i \in \mathcal{R}} g_i(\bar{u}_{[p \in \mathcal{S}_i]}^{(i)}) \\ \text{s.t. } \quad & \bar{u}_{[p \in \mathcal{S}_i]}^{(i)} \in \mathcal{X}_i, \forall i \in \mathcal{R}, \\ & \bar{u}_i^{(i)} = \bar{u}_i^{(p)}, \quad \forall i \in \mathcal{R}, \forall p \in \mathcal{S}_i \setminus i \\ & \bar{u}_p^{(i)} = \bar{u}_p^{(p)}, \quad \forall i \in \mathcal{R}, \forall p \in \mathcal{S}_i \setminus i. \end{aligned}$$

where $\bar{u}_p^{(i)}$ is the copy of the global variable \bar{u}_p kept in memory locally by subproblem i .

Why?


Each subproblem needs to be self-contained: variables will be requested from others according to the communication graph

Two-fold evaluation


- Time to convergence of the distributed algorithm
 - Number of iteration before the iterative procedure stabilizes, measured in different numerical scenarios
- Traffic performance
 - Measure of traffic metrics, both macroscopic and microscopic
- Simulation setup
 - Several network dimensions (from 4 to 180 roads)
 - Initial state randomly selected (in 300 simulations)

Traffic performance


- Comparisons with a best practice (BP) schedule, chosen to optimize the statistical traffic behavior

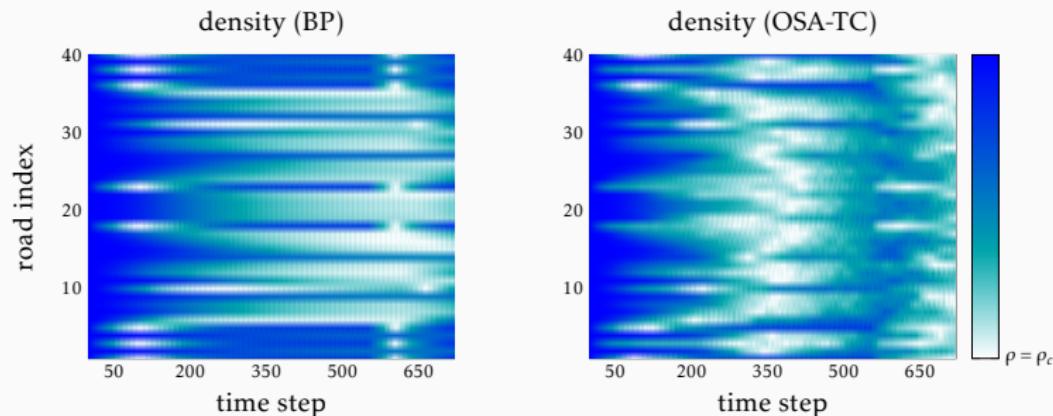

Traffic performance

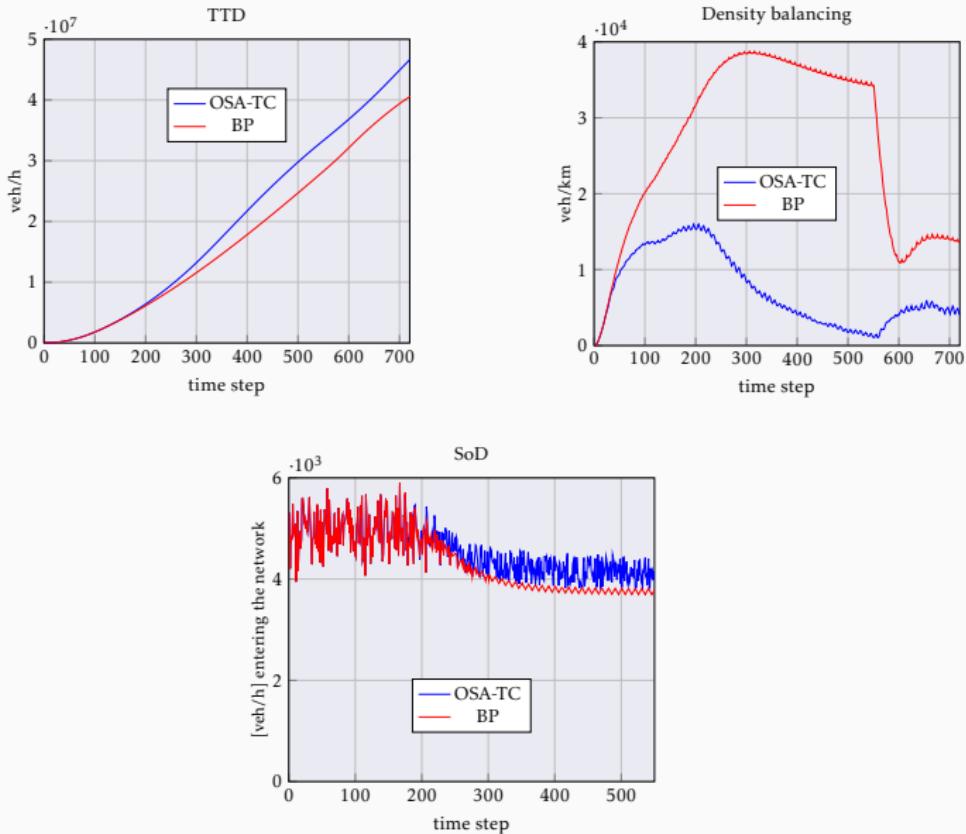

Microscopic simulation

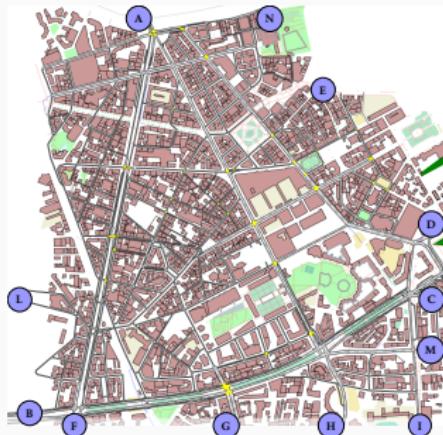

Index	Scenario 1		Scenario 2	
	BP	OSA-TC	BP	OSA-TC
Travelled distance [km]	23396	26471	19772	17003
Travel time [h]	1775	1462	1955	1583
Mean queue [veh]	496	441	627	564
Stop time [sec/km]	123	97	172	139



Scenario description - Case study Grenoble



General characteristics

- Intersection are equipped with several on-off detectors
- Every intersection is controlled by a single-intersection controller
- A fusion of data from GPS and magnetic detectors is used in order to say to the controller how far the trams are
- Several constant parameters (min/max green time, amber time) are decided as function of the speed limit, the number and size of lanes, the size of the intersections

Grenoble traffic lights plan (plan de feux)

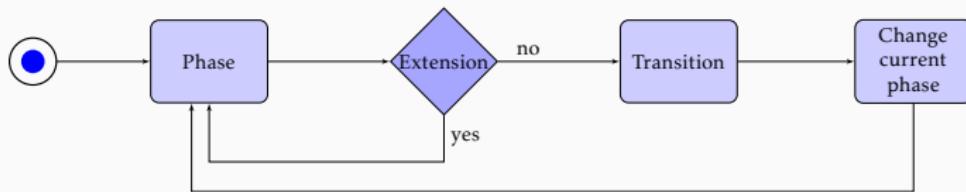


General characteristics - Light traffic plan

Set up:


- Traffic lights plan virtually replicated into Aimsun
- Input flow and supply estimated by real data extracted by loop detectors...
- ...as well as split ratios at intersections...
- ...from 7am to 10am
- Adaptation of the OSA-TC to fit this scenario's technological requirements
- A posteriori analysis of on-line measured data (within Aimsun)

Numerical results


Index	Plan de feux	Optimal control
Input flow [veh/h]	6097	6151
Mean queue [veh]	152	113
Stop time [sec/km]	110	83
TTD [km]	16307	16411
TTT [h]	794	680
Veh. waiting [veh]	333	240

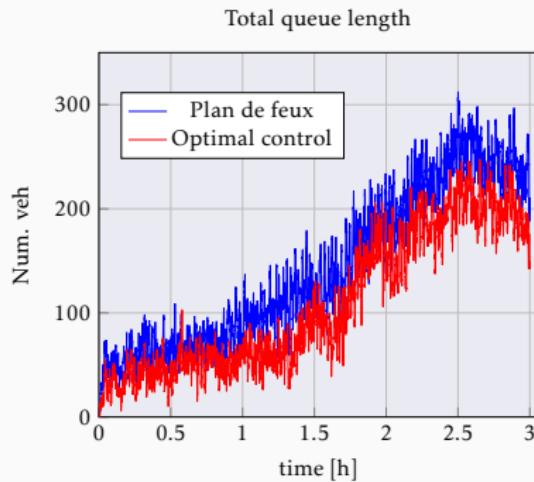

Numerical results

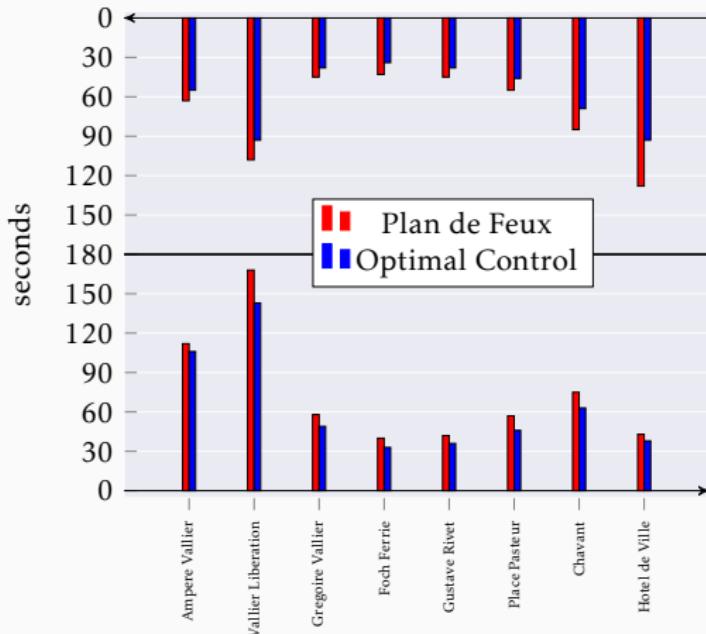


Numerical results

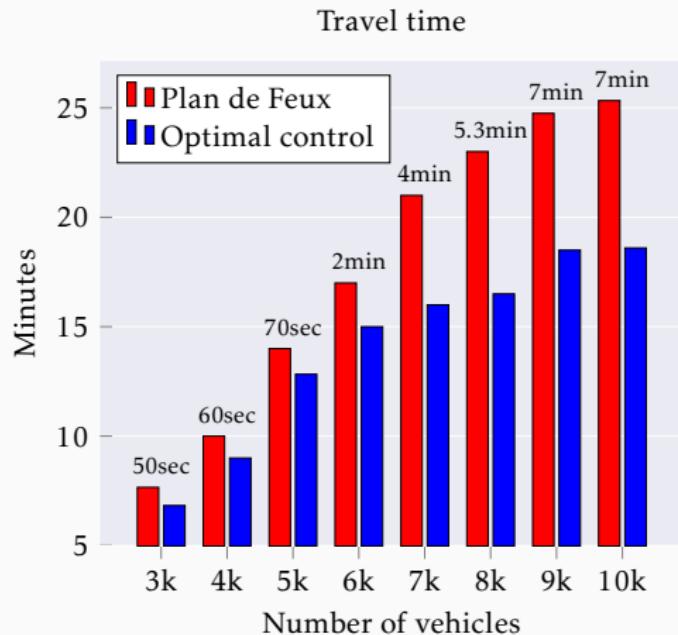

- We have designed an optimization-based algorithm to control green split of traffic lights
- The control algorithm is applicable to large cities thanks to its scalability property
- Numerical simulations show the improvements w.r.t. standard fixed-time policies
- The algorithm can be adapted to real scenarios and in simulations it performs better than "real world" traffic lights scheduling algorithms

Connected vehicles

Classical Vehicles

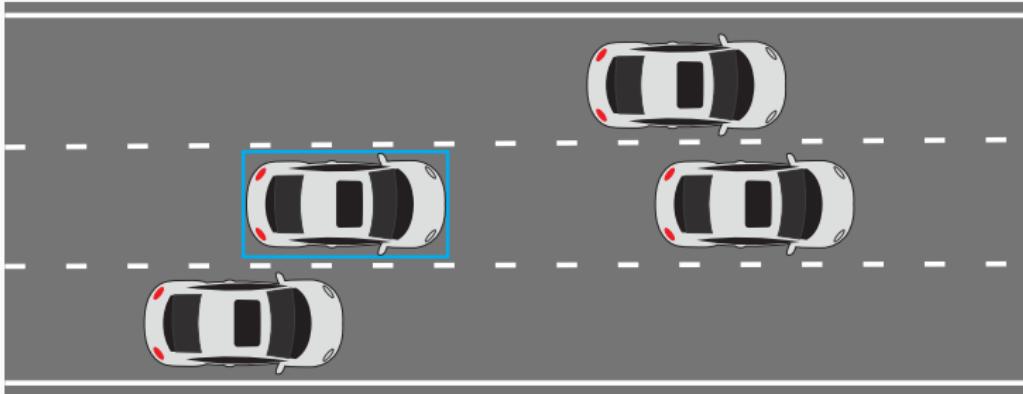


Regular vehicle

Features

- Perception only from the driver's perspective
- Local information only available
- Poor accuracy on observed data

Equipped Vehicles

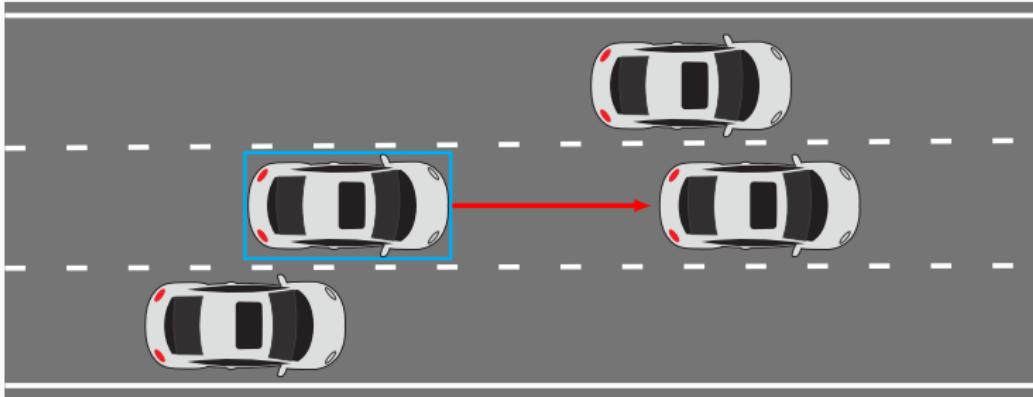

Regular vehicle




Sensor data

Features

- Improved perception via radar sensors
- Speed regulation via Adaptive Cruise Control (ACC)
- Only longitudinal information

Connected Vehicles - V2I

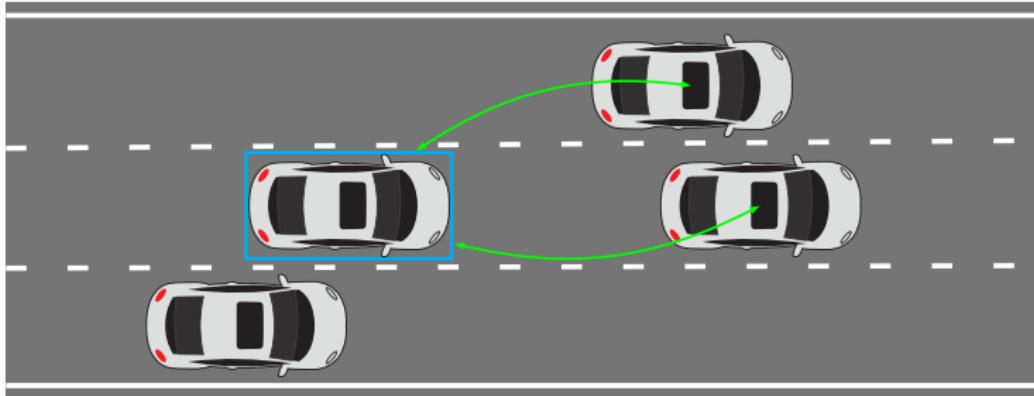

Regular vehicle




Information exchange – V2V

Features

- Improved perception via communication with other vehicles
- Accuracy on information depend on external sensors
- Longitudinal + lateral information

Connected Vehicles - V2I

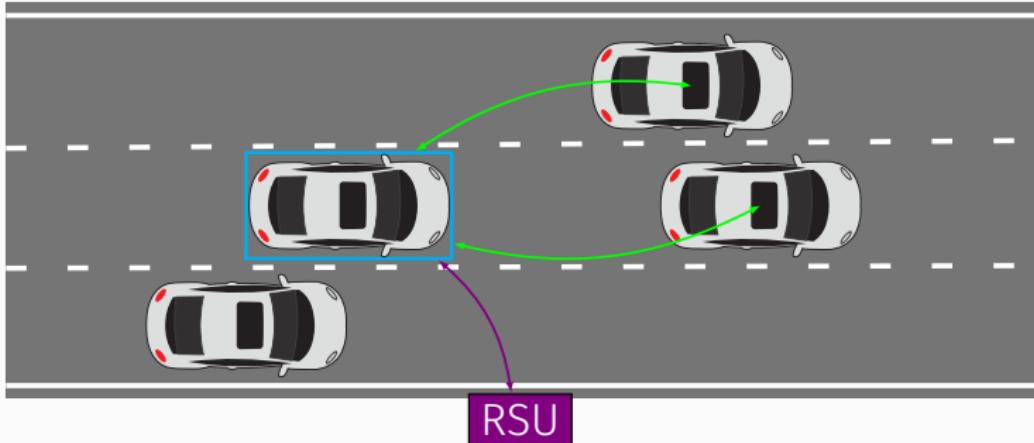

Regular vehicle




↔ Information exchange – V2V ↔ V2I/I2V

Features

- Non local information from infrastructure
- Local information (longitudinal + lateral)
- Accuracy limited by data provided via V2V/V2I

Smart Vehicles

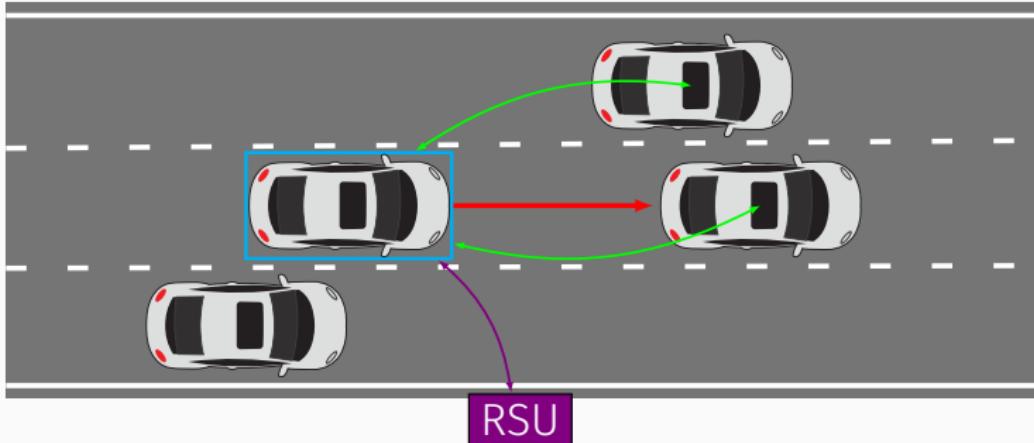

Regular vehicle



Sensor data



Exchanged information – V2V



V2I/I2V

Features

- Local and non local information leveraged by V2X communications
- Improved possibility for better automation (ACC/CACC)

Smart Vehicles

What could be the potential impact of those connected vehicles?

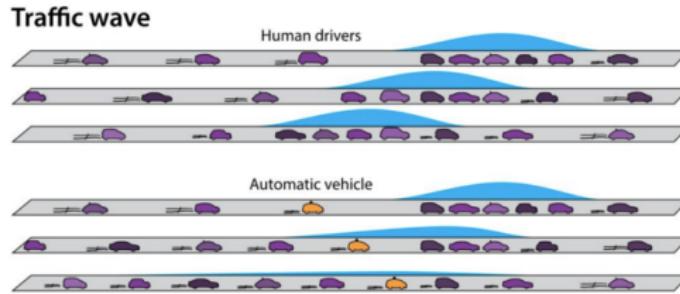


Figure 7: Impact of connected vehicles on traffic


Features

- They contribute as *sensors* for current traffic condition
- They can adapt to traffic conditions known in advance

SCOOP Scenario




Projet
SCOOP
véhicules et routes connectés
connected vehicles and roads

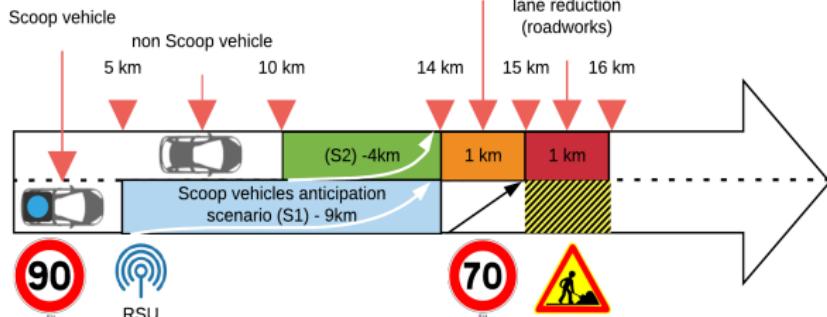

Sensitivity analysis

- Emission distance of broadcasted messages
- Speed drop message
- Demand
- Market penetration rate

Simulation Example SymuVia

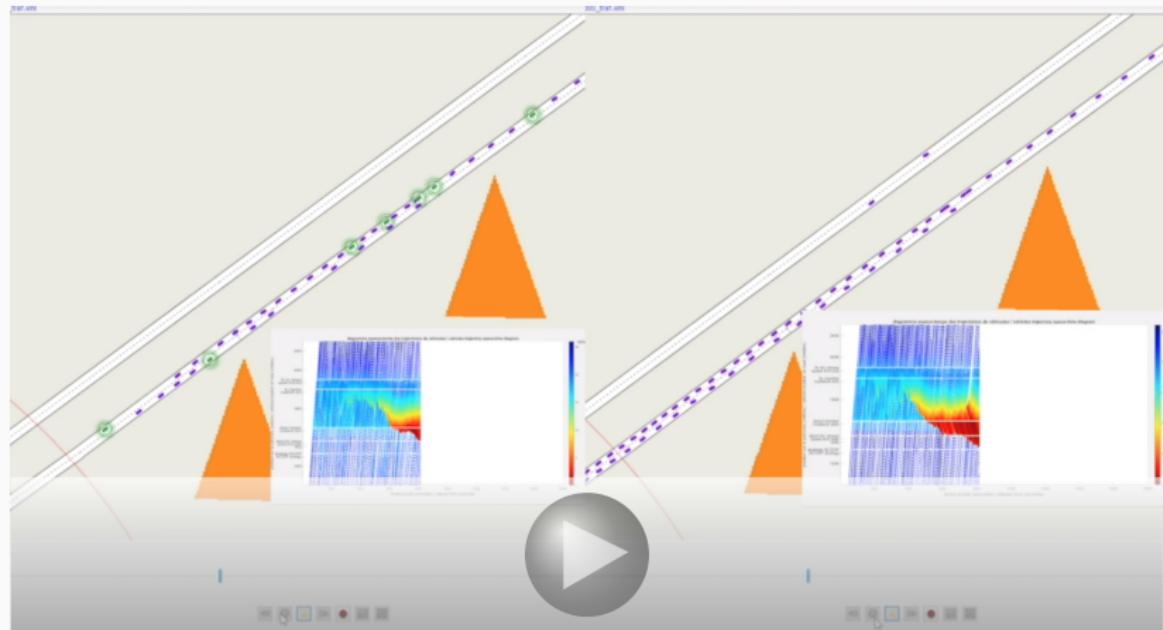

Results in terms of Market Penetration Rate

Spatial distribution of congestion is better achieved at higher *penetration rates*, effects of works are better avoided. Nevertheless, increasing the *penetration rate* may also have an impact on the network throughput.

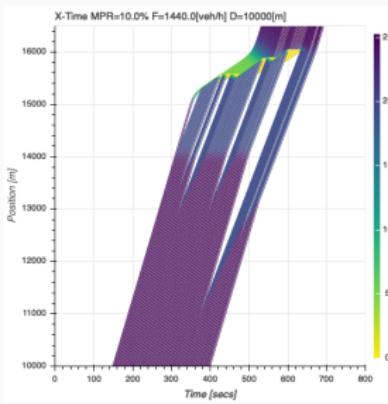


Figure 8: MPR = 10%

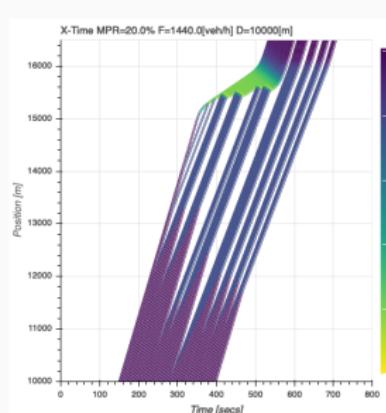


Figure 9: MPR = 20%

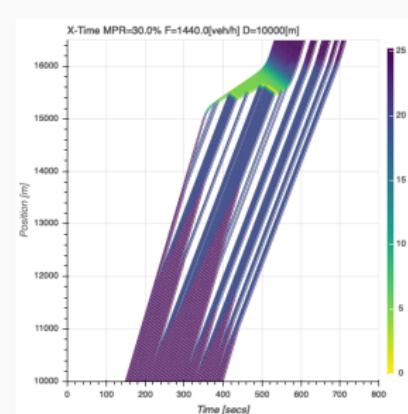


Figure 10: MPR = 30%

Potential impact of Connected vehicles

Earlier messages may potentially increase the impact of CO₂ emissions. The *market penetration rate* is an important factor that may also reduce the impact on CO₂ emissions.

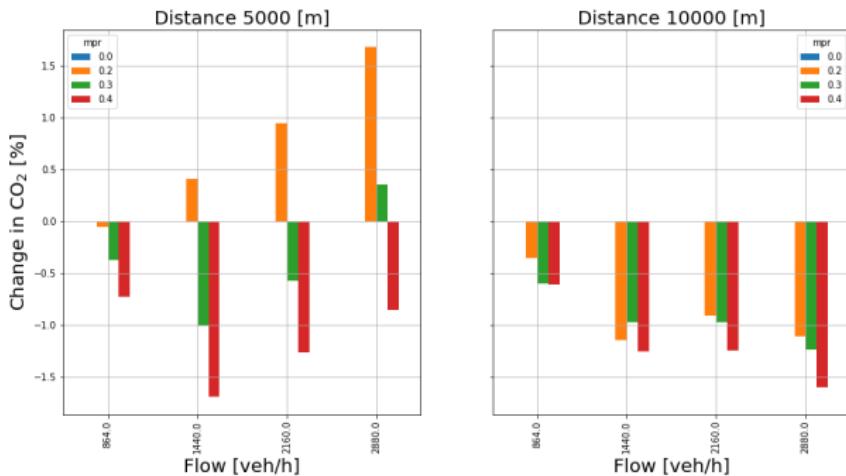


Figure 11: Relative change in CO₂ emissions with SCOOP technologies

Conclusions & Observations

To takeaway

- Introduction of V2V/V2I may have a potential impact on traffic safety, road operation efficiency and emissions.
- Speed drop policies may conduct to optimal absorption of traffic effects
- Market penetration rate itself constitute an important factor for potential environmental impacts.

Conclusions & Observations

To takeaway

- Introduction of V2V/V2I may have a potential impact on traffic safety, road operation efficiency and emissions.
- Speed drop policies may conduct to optimal absorption of traffic effects
- Market penetration rate itself constitute an important factor for potential environmental impacts.

Current research directions

- Analyzing the impact of delayed acceptation on policies and the effect of anarchy.
- Non-uniform market penetration rates.

Vehicle platooning

PLATOONING



Dynamic traffic assignment - Problem



Questions

How to assign the flow at time t ?

Some key principles^a:

1. Flow conservation
2. Flow maximization
3. Infrastructure limitations
4. Set/calibrate drivers' preferences


^aGiuseppe Maria Coclite and Benedetto Piccoli. "Traffic Flow on a Road Network". In: *Society for Industrial and Applied Mathematics* 36.6 (Feb. 2002), pp. 1862–2886. ISSN: 0036-1410. arXiv: 0202146 [math].

Unless the drivers preferences are well known the solution to the DTA problem is undetermined.

Dynamic traffic assignment at Merges


Let consider the case:

$$\text{s.t } f_1 \leq D_1$$

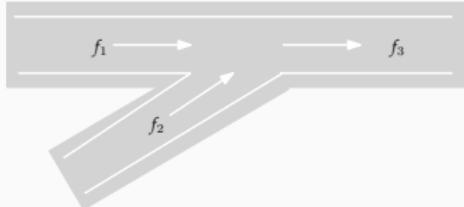

Solution


In general the dynamic traffic assigment problem has multiple values f_1, f_2 that may satisfy the problem constraints.

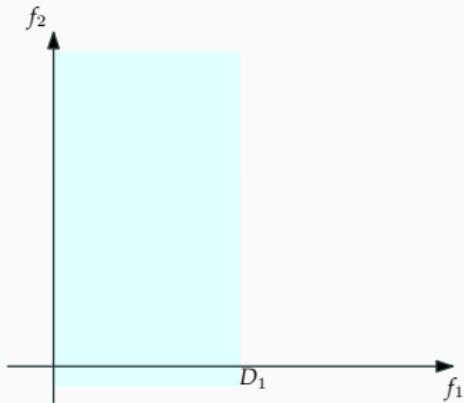

Dynamic traffic assignment at Merges


Let consider the case:

$$\text{s.t.} \quad f_1 \leq D_1 \\ f_2 \leq D_2$$

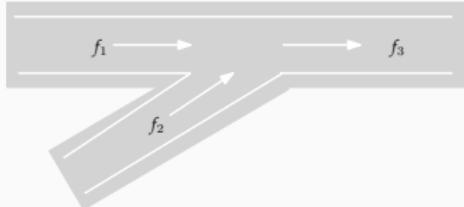

Solution

In general the dynamic traffic assigment problem has multiple values f_1, f_2 that may satisfy the problem constraints.

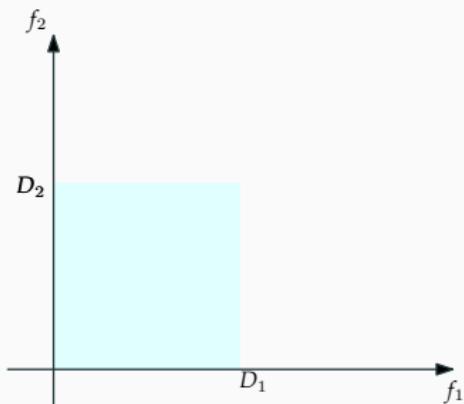


Dynamic traffic assignment at Merges

Let consider the case:

$$\text{s.t } f_1 \leq D_1$$


$$f_2 \leq D_2$$

$$f_1 + f_2 \leq S_3$$

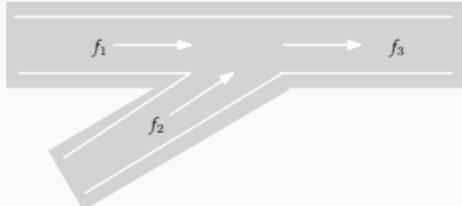

Solution


In general the dynamic traffic assigment problem has multiple values f_1, f_2 that may satisfy the problem constraints.

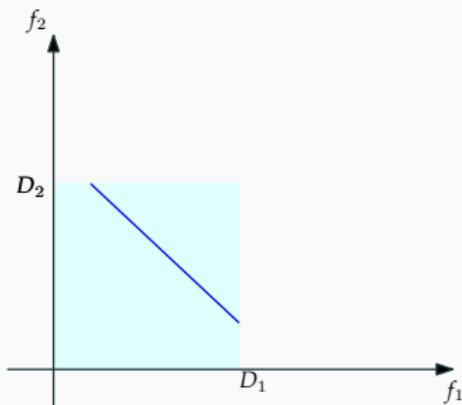

Dynamic traffic assignment at Merges


Let consider the case:

$$\begin{aligned} \max_{f_i} \quad & \sum f_i \\ \text{s.t.} \quad & f_1 \leq D_1 \\ & f_2 \leq D_2 \\ & f_1 + f_2 \leq S_3 \end{aligned}$$

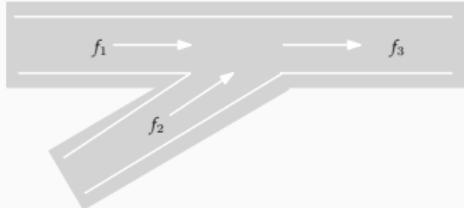


Solution

In general the dynamic traffic assigment problem has multiple values f_1, f_2 that may satisfy the problem constraints.

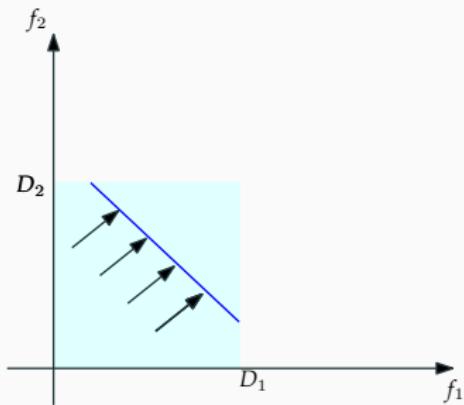

Control of vehicle distance in vehicles (ADAS)

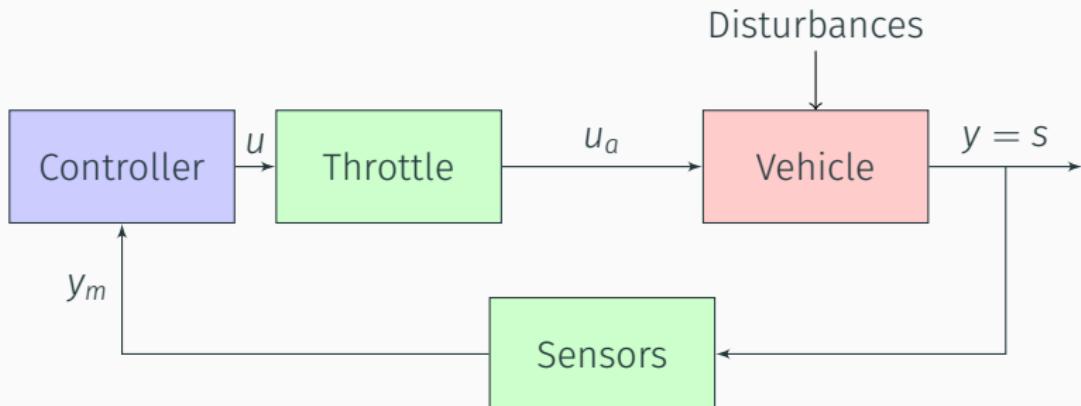

Objective

- u - Required acceleration
- u_a - Gas pedal
- y - Inter vehicle distance
- Regulate the headway space between two vehicles.
- Adapt to dynamic condition of the leader.

Context on vehicle platooning

Truck platooning has some ideas in mind:

- **Objective:** Improve fuel consumption in trucks

Context on vehicle platooning

Truck platooning has some ideas in mind:

- **Objective:** Improve fuel consumption in trucks
- **Traffic issues:**

Context on vehicle platooning

Truck platooning has some ideas in mind:

- **Objective:** Improve fuel consumption in trucks
- **Traffic issues:**
 - String stability → flow stability.

Context on vehicle platooning

Truck platooning has some ideas in mind:

- **Objective:** Improve fuel consumption in trucks
- **Traffic issues:**
 - String stability → flow stability.
 - Interactions at network discontinuities → Capacity drop.

There however still some concerns regarding interaction between them and the reality

Context on vehicle platooning

Truck platooning has some ideas in mind:


- **Objective:** Improve fuel consumption in trucks
- **Traffic issues:**
 - String stability → flow stability.
 - Interactions at network discontinuities → Capacity drop.

There however still some concerns regarding interaction between them and the reality


Objective

The main objective today is to propose a strategies for promoting Connected & Automated Vehicles maneuvers at network discontinuities.

Human Driven - Car following model

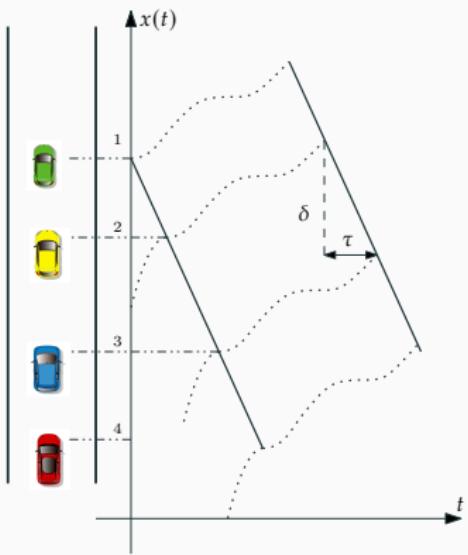


Human Driven - Car following model

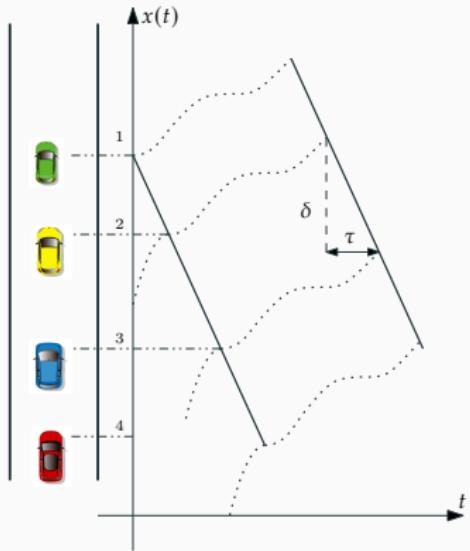


$$x_i(t) = \min(x_i^F(t), x_i^C(t))$$

$$\begin{cases} x_i^F(t) = x_i(t - \tau) + u\tau \\ x_i^C(t) = x_{i-1}(t - \tau) - \delta \end{cases}$$

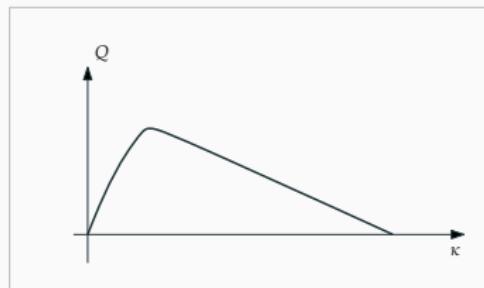


Human Driven - Car following model

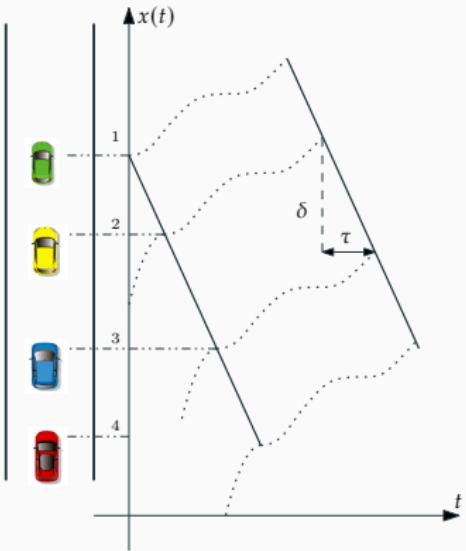


$$x_i(t) = \min(x_i^F(t), x_i^C(t))$$

$$\begin{cases} x_i^F(t) = x_i(t - \tau) + u\tau \\ x_i^C(t) = x_{i-1}(t - \tau) - \delta \end{cases}$$

- Truck properties
 - L Vehicle's length
 - u Free flow speed
 - κ_x Maximum density
- Platoon properties
 - N Number of trucks
 - g_t Time gap policy
- Time headway: $h^P = g^t + L/u$

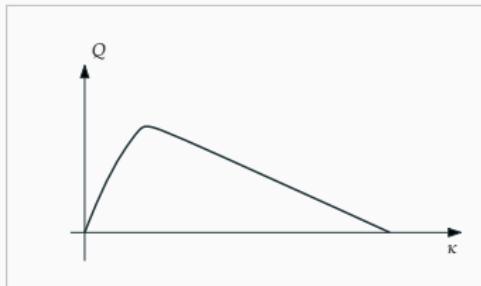


Human Driven - Car following model

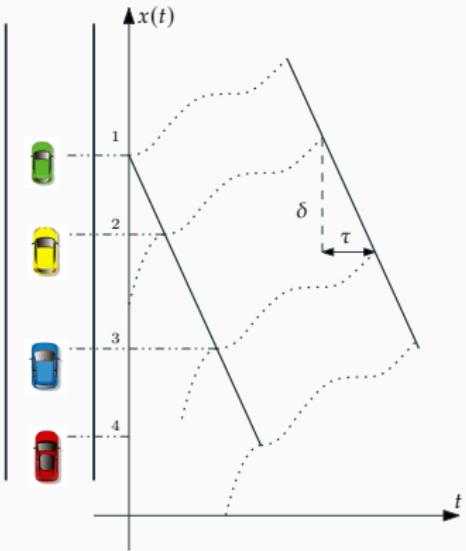


$$x_i(t) = \min(x_i^F(t), x_i^C(t))$$

$$\begin{cases} x_i^F(t) = x_i(t - \tau) + u\tau \\ x_i^C(t) = x_{i-1}(t - \tau) - \delta \end{cases}$$

- Truck properties
 - L Vehicle's length
 - u Free flow speed
 - κ_x Maximum density
- Platoon properties
 - N Number of trucks
 - g_t Time gap policy
- Time headway: $h^P = g^t + L/u$

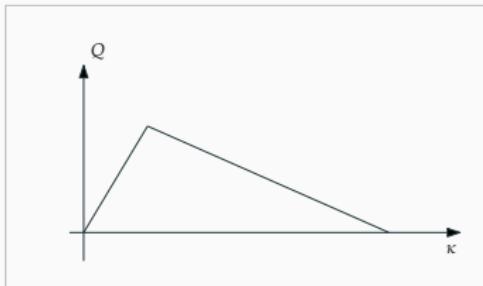


Human Driven - Car following model

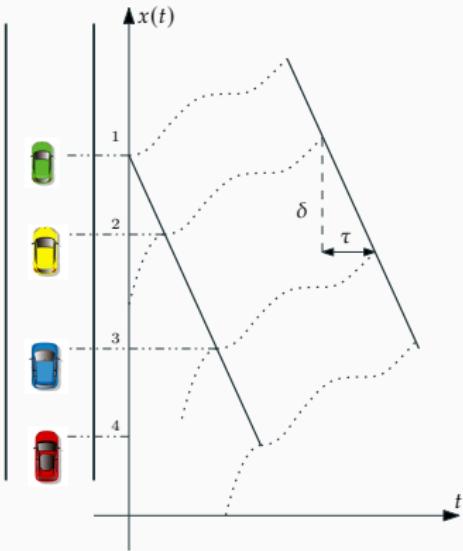


$$x_i(t) = \min(x_i^F(t), x_i^C(t))$$

$$\begin{cases} x_i^F(t) = x_i(t - \tau) + u\tau \\ x_i^C(t) = x_{i-1}(t - \tau) - \delta \end{cases}$$

- Truck properties
 - L Vehicle's length
 - u Free flow speed
 - κ_x Maximum density
- Platoon properties
 - N Number of trucks
 - g_t Time gap policy
- Time headway: $h^P = g^t + L/u$

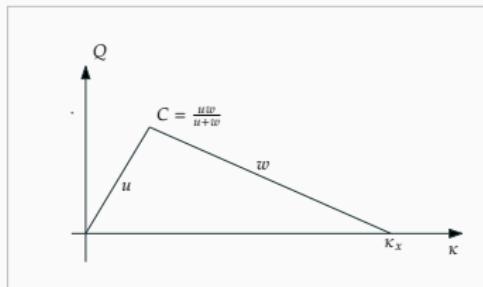


Human Driven - Car following model

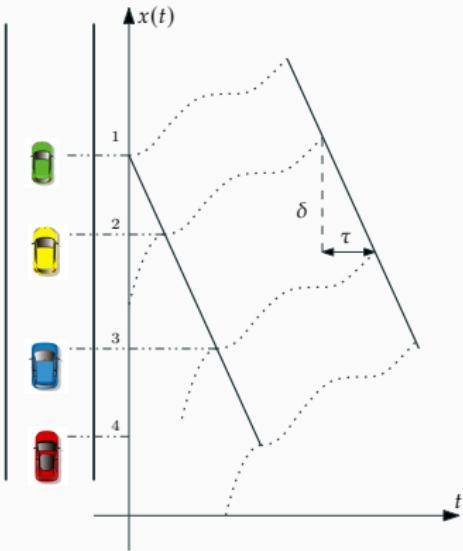

$$x_i(t) = \min(x_i^F(t), x_i^C(t))$$

$$\begin{cases} x_i^F(t) = x_i(t - \tau) + u\tau \\ x_i^C(t) = x_{i-1}(t - \tau) - \delta \end{cases}$$

- Truck properties
 - L Vehicle's length
 - u Free flow speed
 - κ_x Maximum density
- Platoon properties
 - N Number of trucks
 - g_t Time gap policy
- Time headway: $h^P = g^t + L/u$

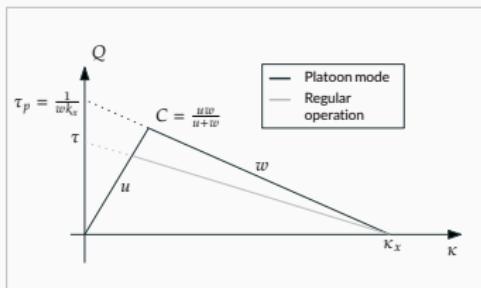

Low speed insertion Problems⁴

- Low safety


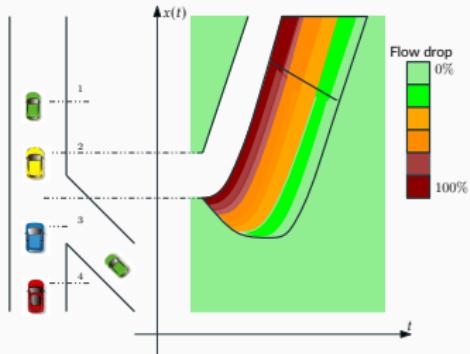


Figure 12: Low speed wave propagation

⁴Aurélien Duret, Jacques Bouffier, and Christine Buisson. "Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream". In: *Transportation Research Record: Journal of the Transportation Research Board* 2188 (2011), pp. 96–107. ISSN: 0361-1981.

Low speed insertion Problems⁴

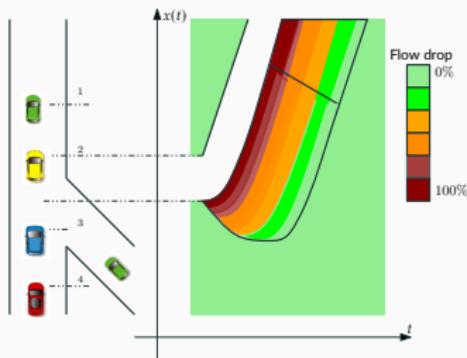


- Low safety
- Shockwave initiation

Figure 12: Low speed wave propagation

⁴Duret, Bouffier, and Buisson, “Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream”.

Low speed insertion Problems⁴

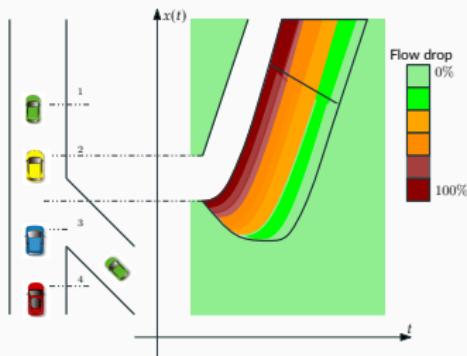


- Low safety
- Shockwave initiation
- Transition period until equilibrium

Figure 12: Low speed wave propagation

⁴Duret, Bouffier, and Buisson, “Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream”.

Low speed insertion Problems⁴

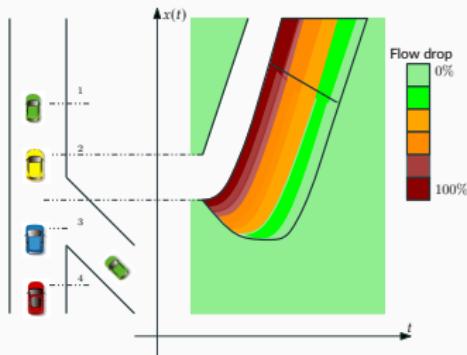

- Low safety
- Shockwave initiation
- Transition period until equilibrium
- This may create capacity drop

Figure 12: Low speed wave propagation

⁴Duret, Bouffier, and Buisson, “Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream”.

Low speed insertion Problems⁴

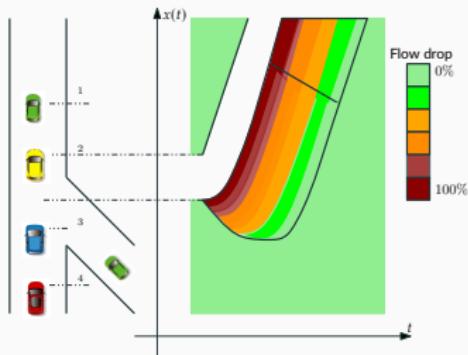


Figure 12: Low speed wave propagation


- Low safety
- Shockwave initiation
- Transition period until equilibrium
- This may create capacity drop

Proposal


It is necessary to anticipate for truck platoons to anticipate these maneuvers.

⁴Duret, Bouffier, and Buisson, “Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream”.

Truck platoon models near a merge

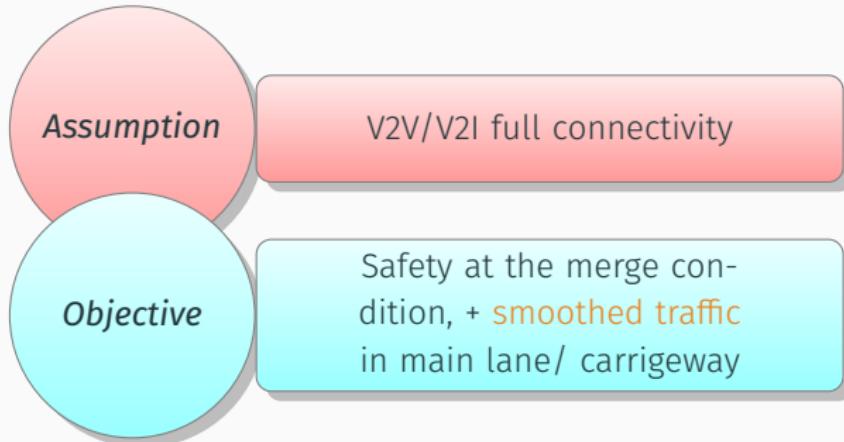

Truck platoon models near a merge

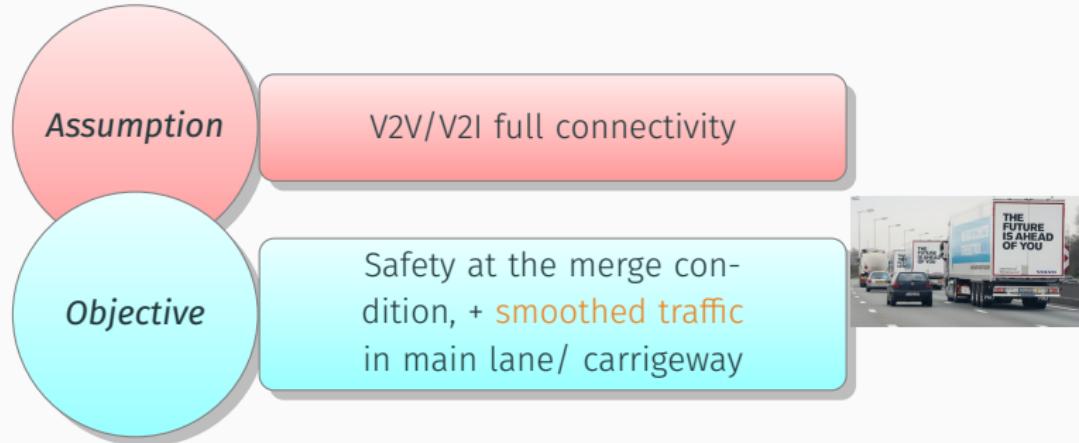

Anticipated maneuver

Detection Measurement / detection of vehicles far upstream

Yielding Coordinated deceleration between all trucks.


Insertion Smooth insertion

Maneuver execution


The maneuver is executed via a bi-level control strategy⁵:

Tactical layer Takes decision at the traffic level.

Operational layer Operates vehicles and control its acceleration.

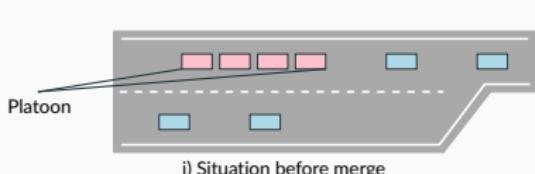

i) Situation before merge

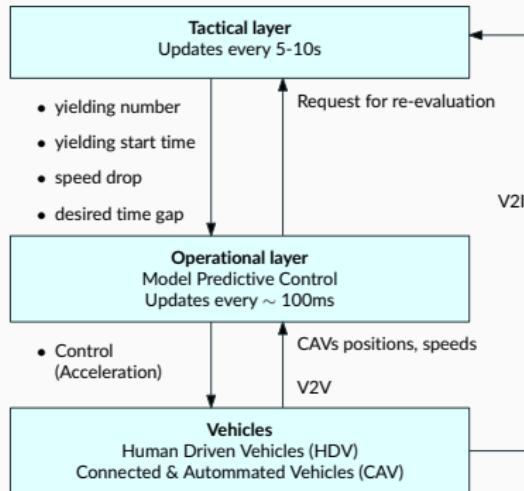



⁵A Duret, A Ladino, and M Wang. "Hierarchical multi-injection strategy and platoon manoeuvres at network junctions". In: *2nd Symposium on Management of Future Motorway and Urban Traffic Systems*. Ed. by EU. Vol. 2. Ispra, 2018, pp. 11–13.

Maneuver execution

The maneuver is executed via a bi-level control strategy⁵:

Tactical layer Takes decision at the traffic level.

Operational layer Operates vehicles and control its acceleration.

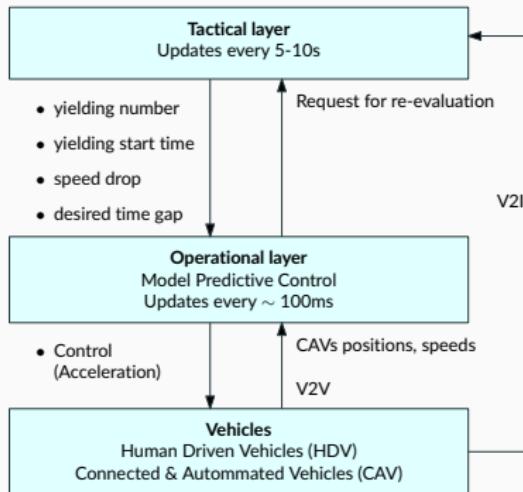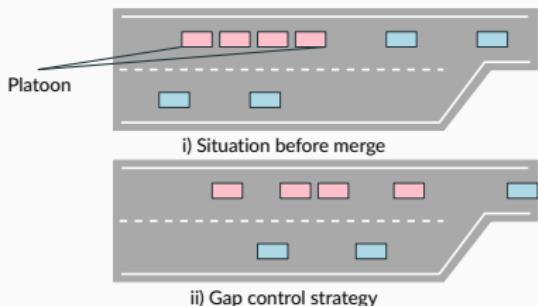



⁵Duret, Ladino, and Wang, "Hierarchical multi-injection strategy and platoon manoeuvres at network junctions".

Maneuver execution

The maneuver is executed via a bi-level control strategy⁵:

Tactical layer Takes decision at the traffic level.

Operational layer Operates vehicles and control its acceleration.

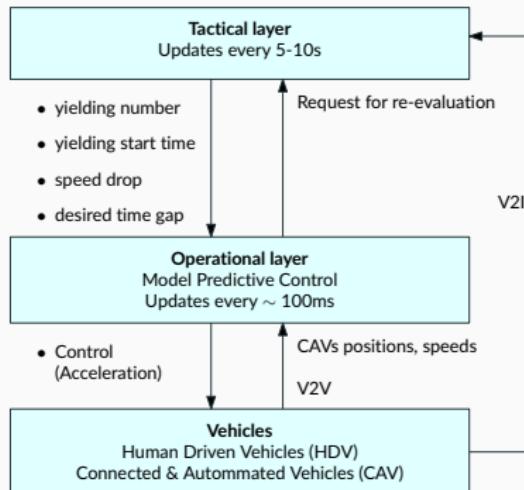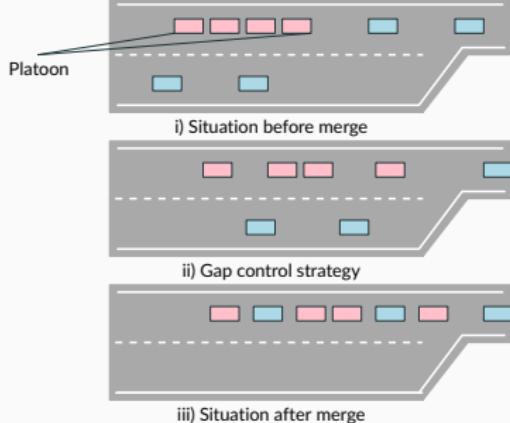

⁵Duret, Ladino, and Wang, “Hierarchical multi-injection strategy and platoon manoeuvres at network junctions”.

Important aspects in maneuver executions

This maneuver can be executed in multiple ways,

- Ioannis A. Ntousakis, Ioannis K. Nikolos, and Markos Papageorgiou. "Optimal vehicle trajectory planning in the context of cooperative merging on highways". In: *Transportation Research Part C: Emerging Technologies* 71 (Oct. 2016), pp. 464–488. ISSN: 0968090X; Jackeline Rios-Torres and Andreas A. Malikopoulos. "Automated and Cooperative Vehicle Merging at Highway On-Ramps". In: *IEEE Transactions on Intelligent Transportation Systems* 18.4 (2017), pp. 780–789. ISSN: 15249050 Designed focused on trajectory planning problem.
- Mixed traffic. It is a key important factor for the controllability of the system.

Inputs

T_m merging time

X_m merging
position

u merging speed

Important aspects in maneuver executions

This maneuver can be executed in multiple ways,

- Designed focused on trajectory planning problem.
- Mixed traffic. It is a key important factor for the controllability of the system.

Inputs

T_m merging time

Parameters

X_m merging

ε maximum speed drop

position

$a^{-/+}$ maximum acceleration.

u merging speed

Important aspects in maneuver executions

This maneuver can be executed in multiple ways,

- Designed focused on trajectory planning problem.
- Mixed traffic. It is a key important factor for the controllability of the system.

Inputs

	Parameters	Decision variables
T_m merging time	ε maximum speed drop	i Truck index
X_m merging position	$a^{-/+}$ maximum acceleration.	T_a anticipation time
u merging speed		

Important aspects in maneuver executions

This maneuver can be executed in multiple ways,

- Designed focused on trajectory planning problem.
- Mixed traffic. It is a key important factor for the controllability of the system.


Inputs

	Parameters	Decision variables
T_m merging time		
X_m merging position	ε maximum speed drop $a^{-/+}$ maximum acceleration.	i Truck index T_a anticipation time
u merging speed		


Mixed traffic assumption

Regarding the mixed traffic $w = \underbrace{\delta_p / \tau_p}_{\text{CAV}} = \underbrace{\delta / \tau}_{\text{HDV}}$


Vehicle merging case I: CAV environment

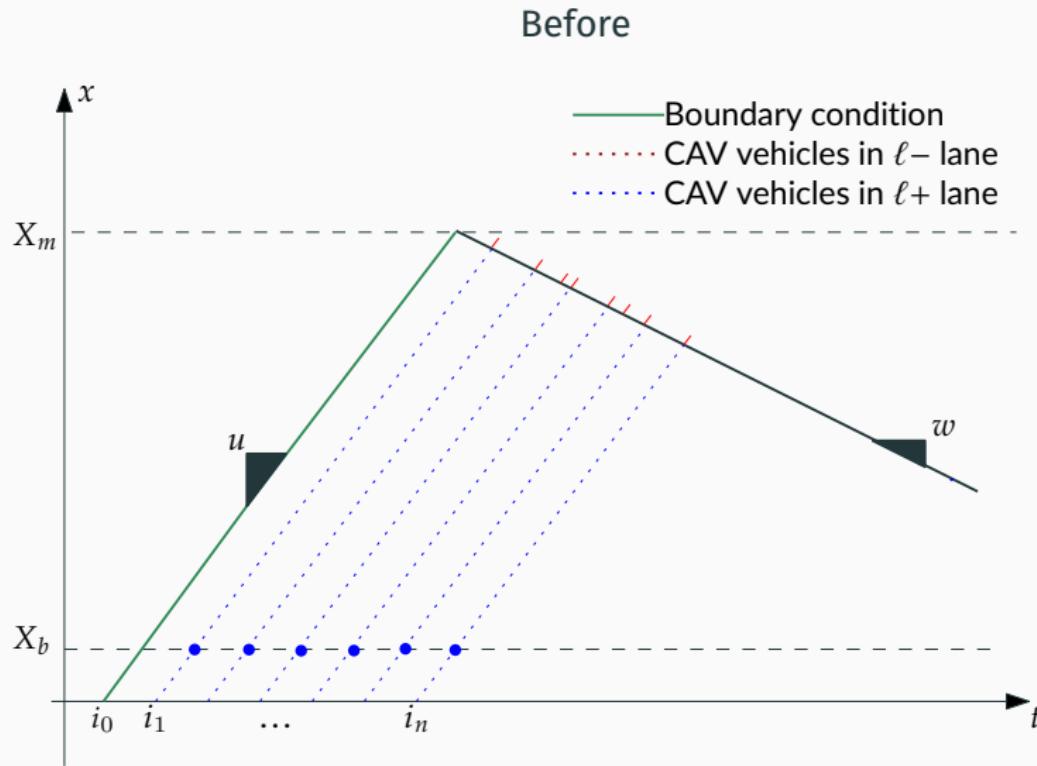


Vehicle merging case I: CAV environment

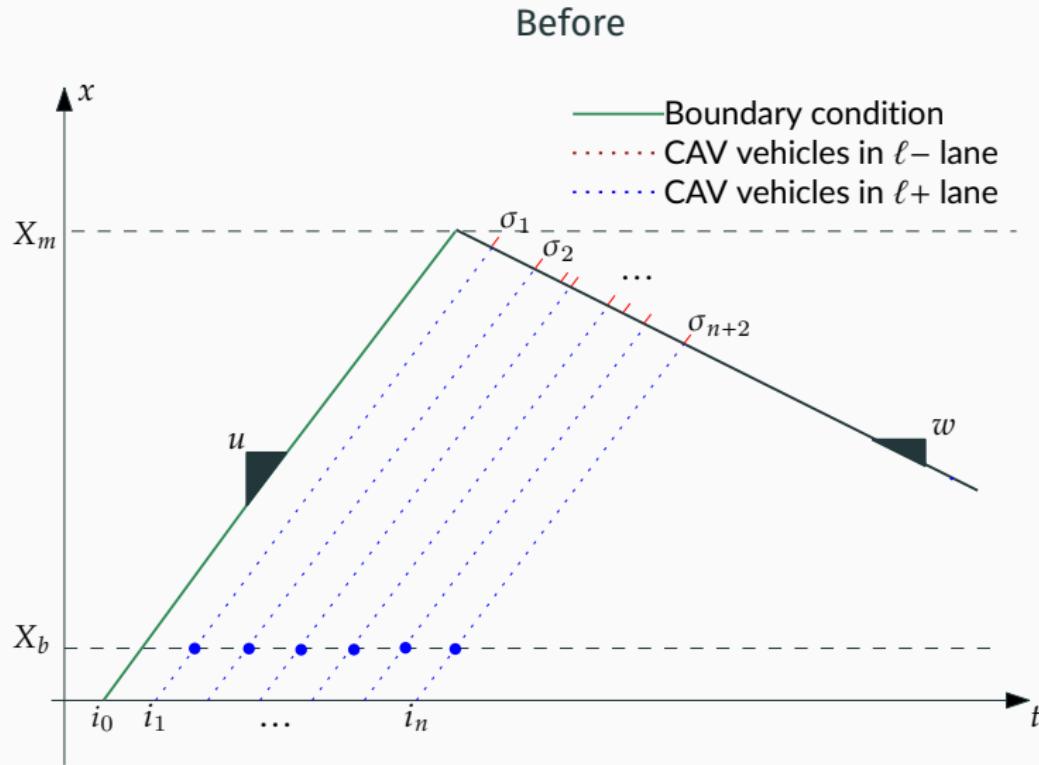


Vehicle merging case I: CAV environment

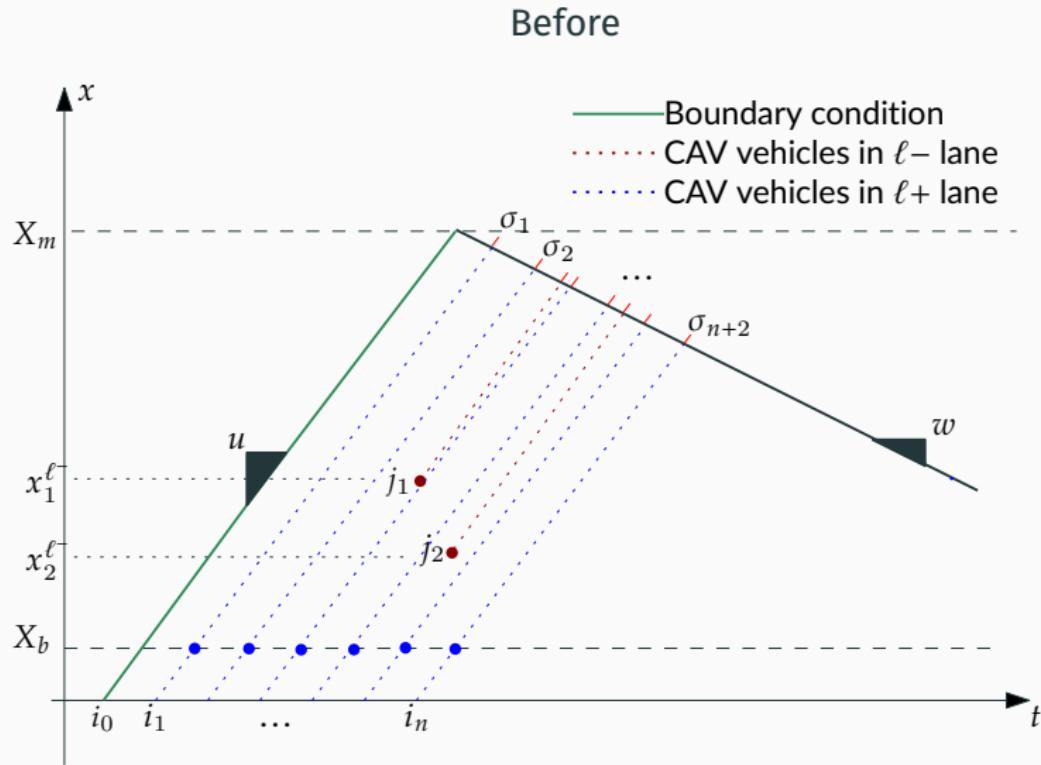

Vehicle merging case I: CAV environment

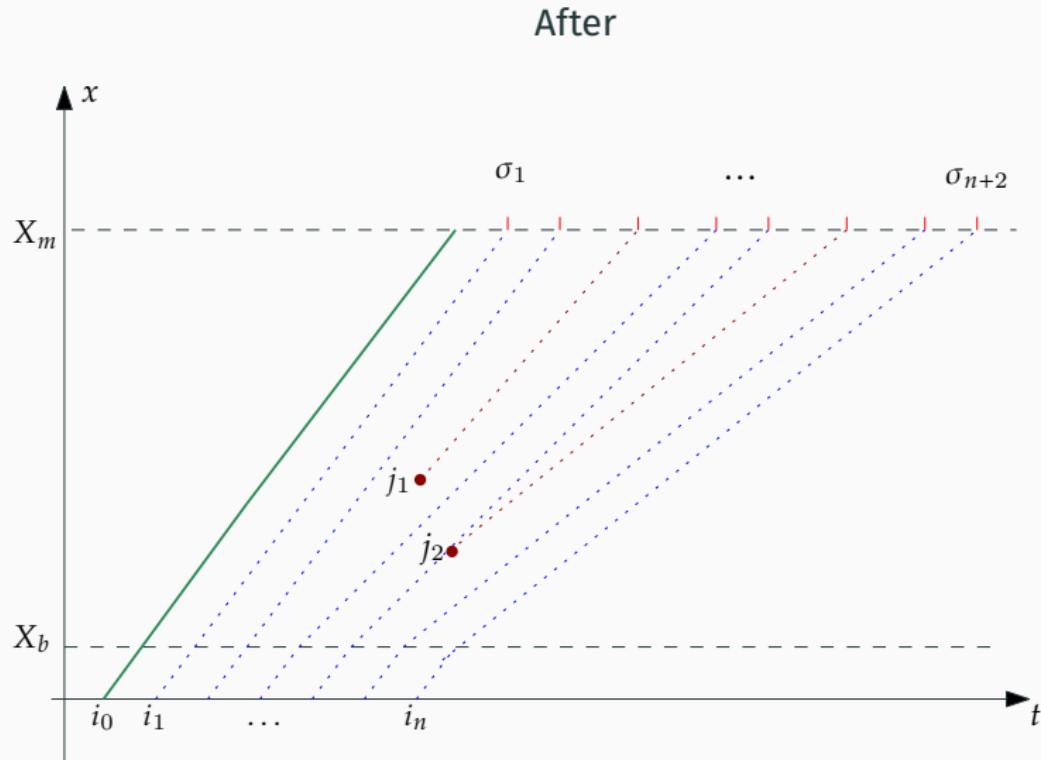


Vehicle merging case I: CAV environment

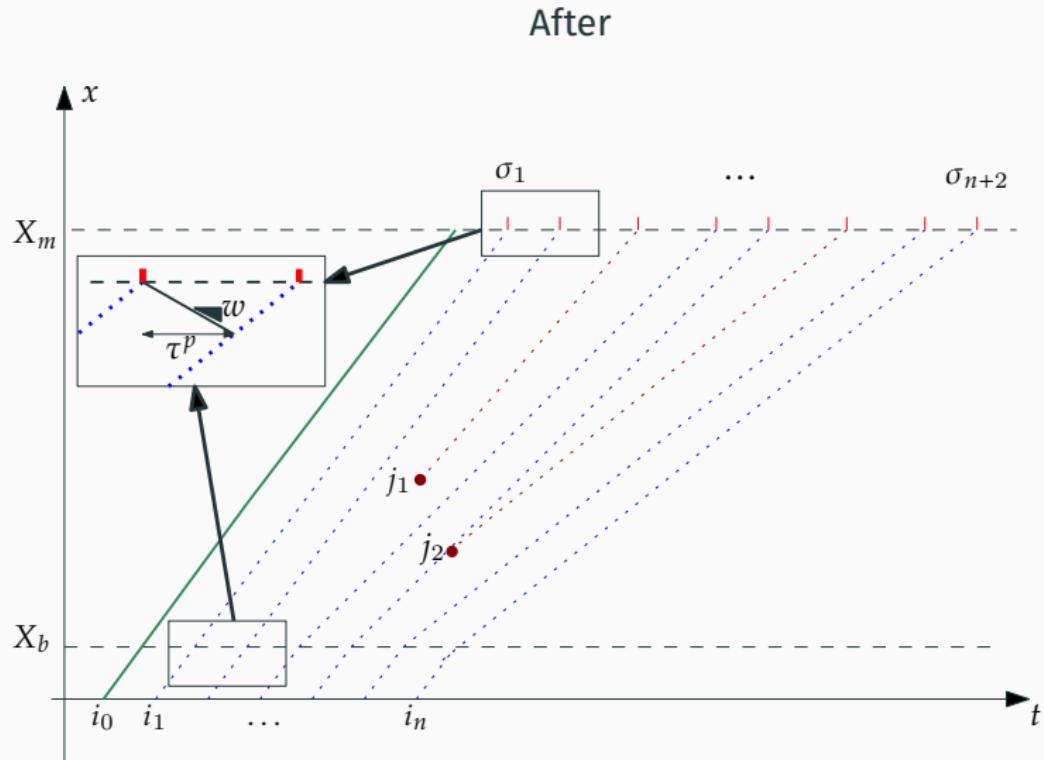


Vehicle merging case I: CAV environment


After

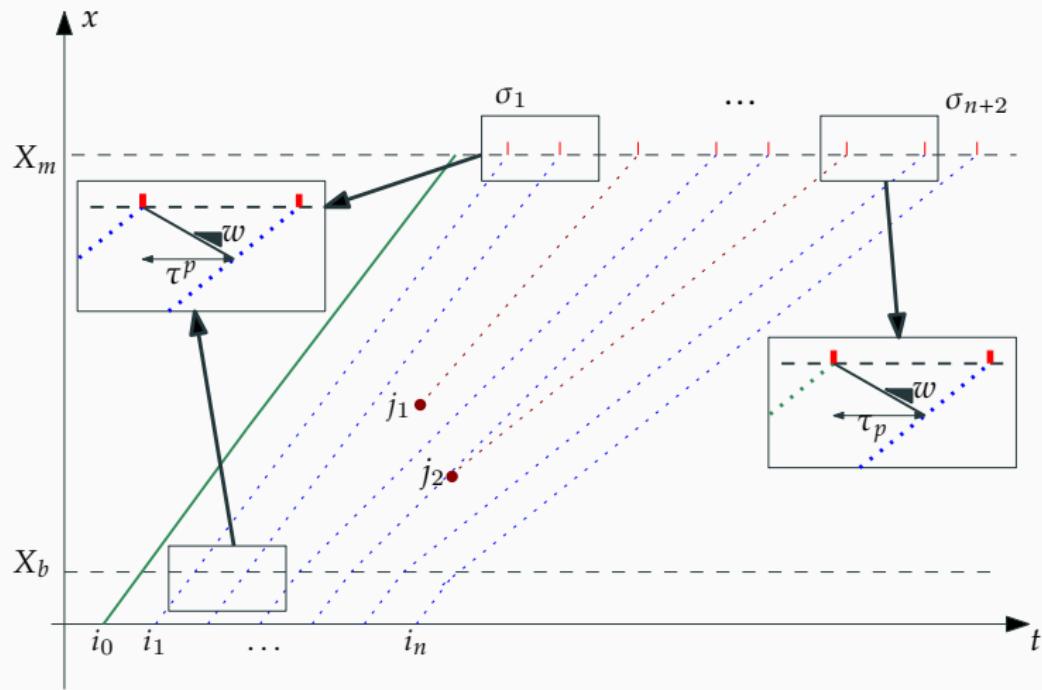


Vehicle merging case II: Mixed environment

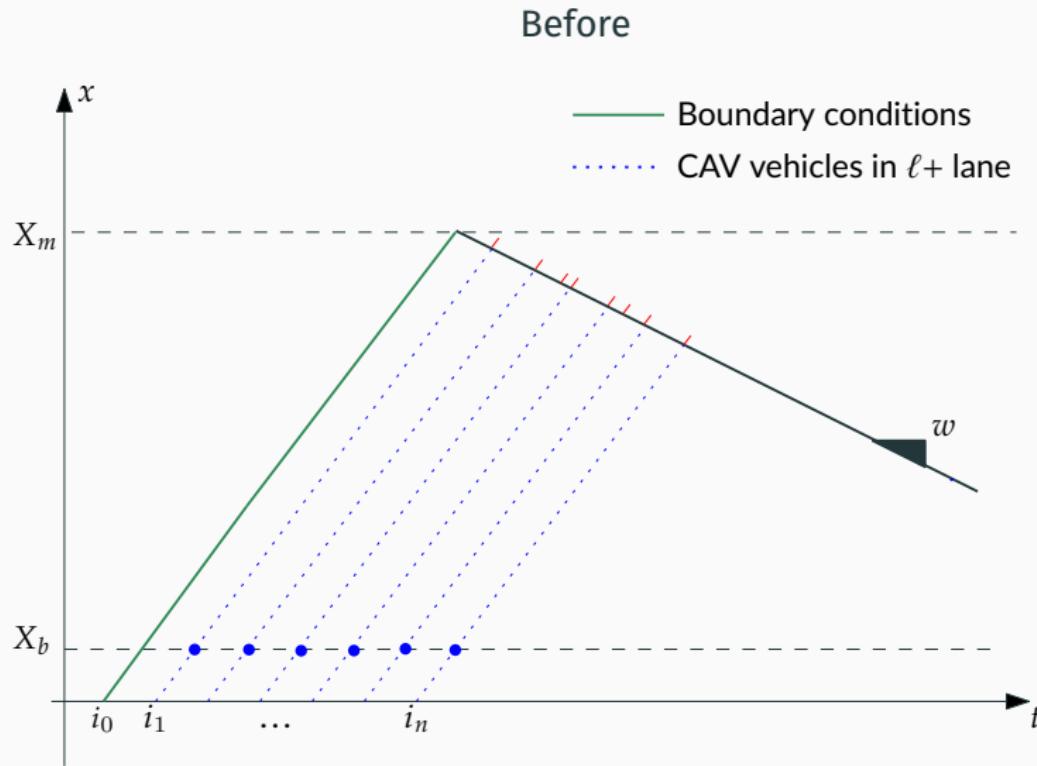


Vehicle merging case II: Mixed environment

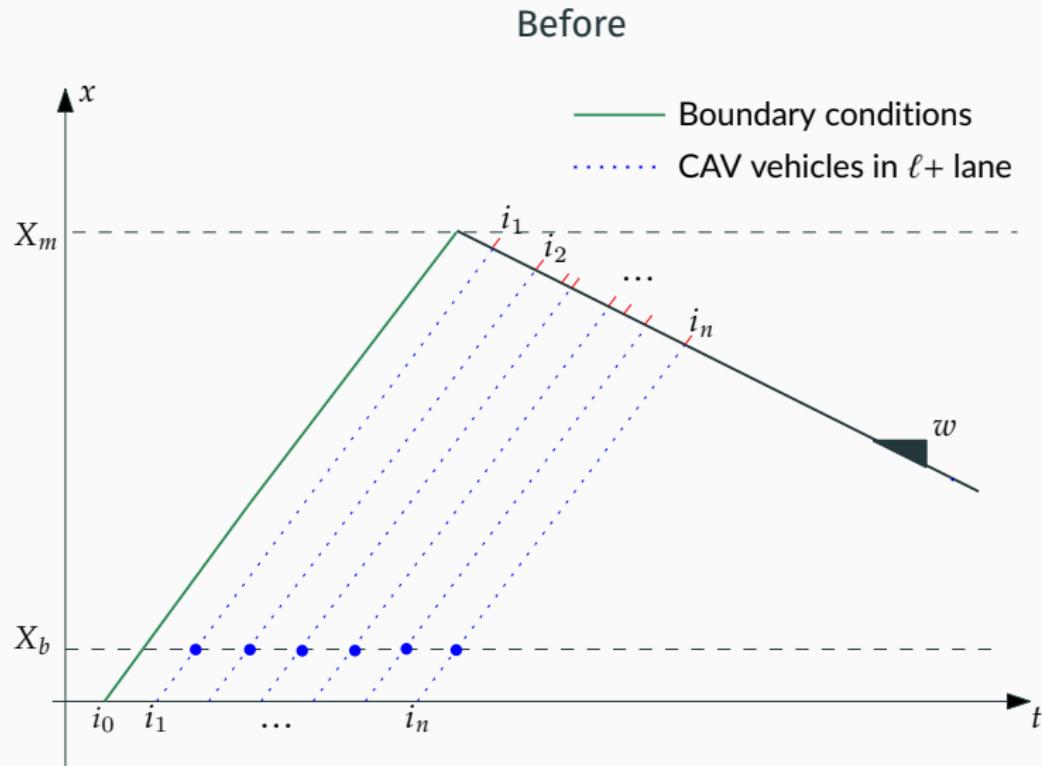


Vehicle merging case II: Mixed environment

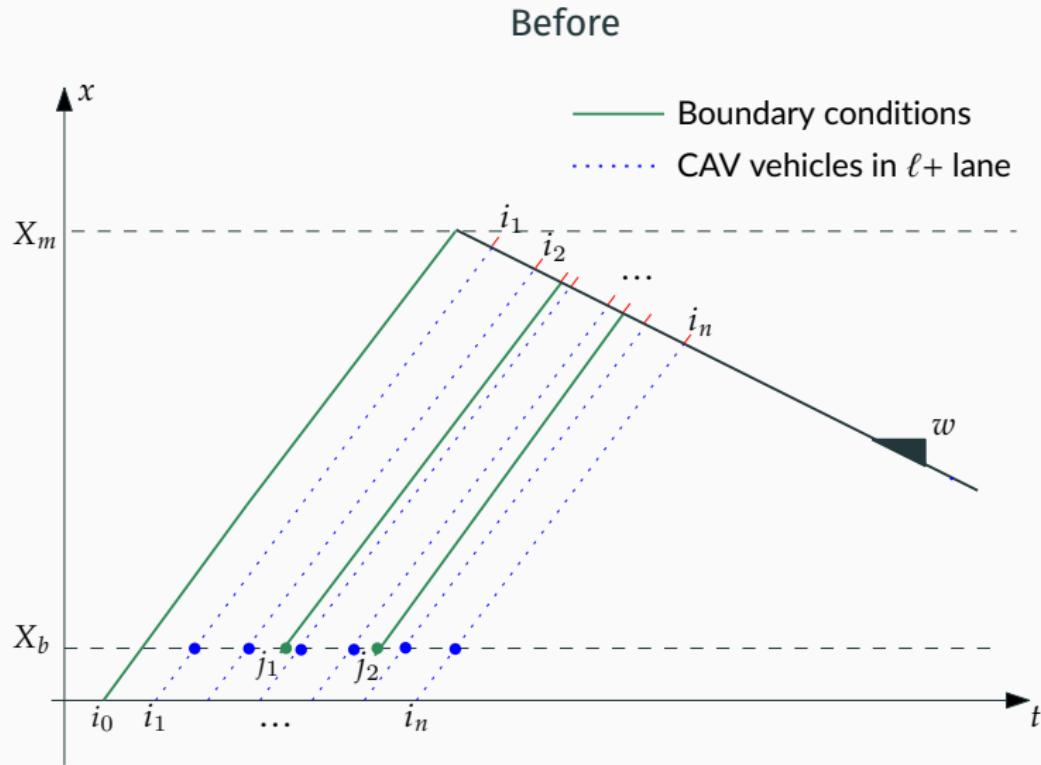


Vehicle merging case I: CAV environment

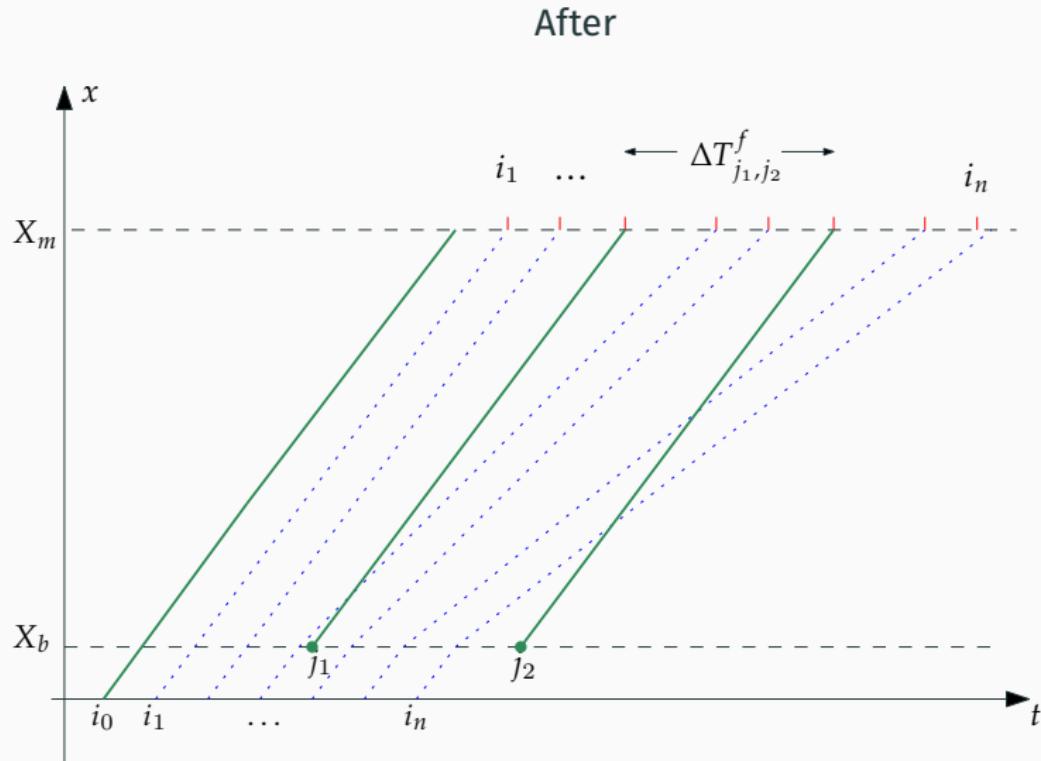

Vehicle merging case I: CAV environment

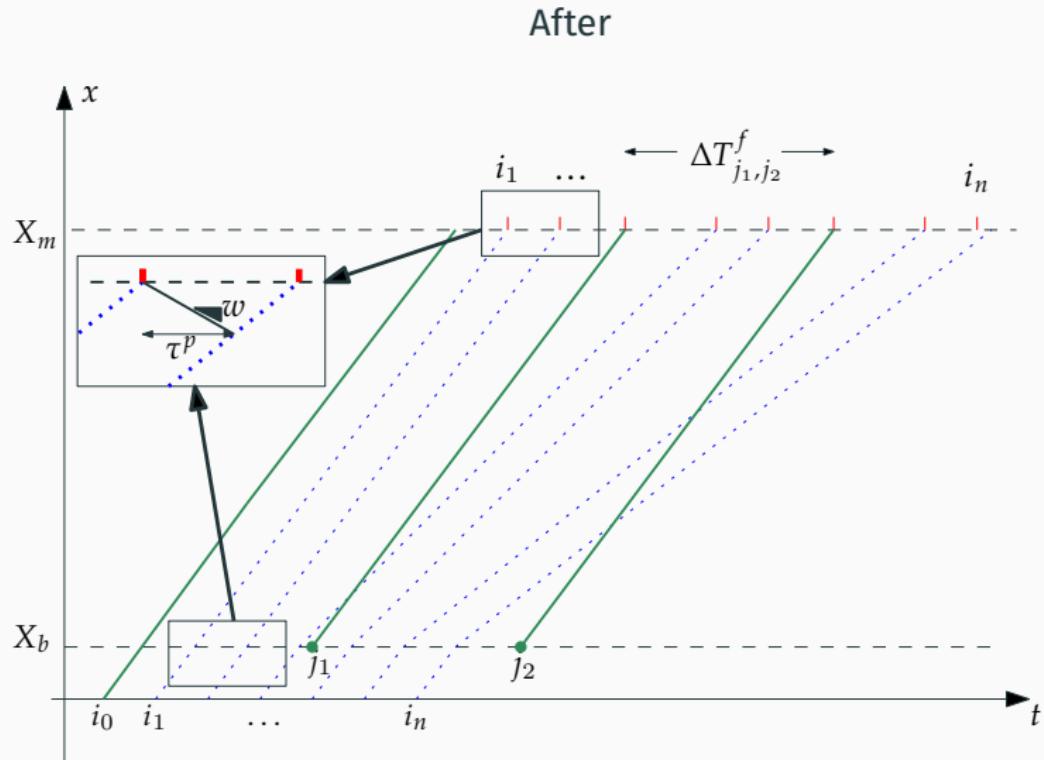

Vehicle merging case I: CAV environment

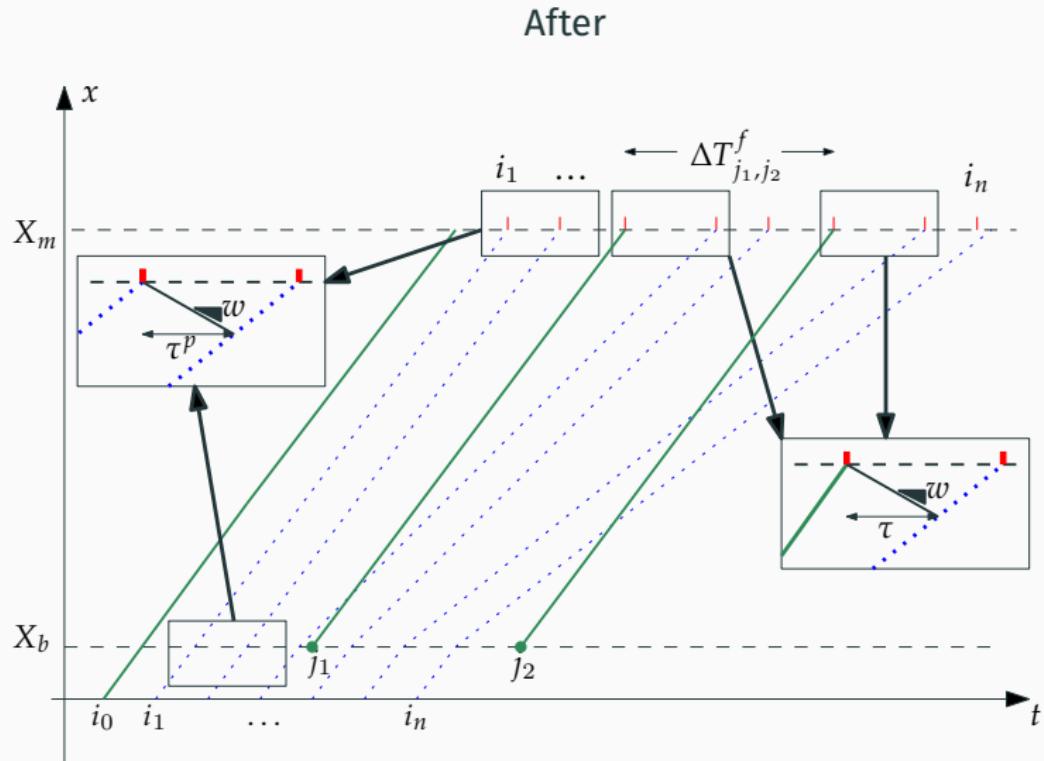

Vehicle merging - summary

Finding intersections with congestion wave

Let $g_k^\ell = \begin{pmatrix} x_k^\ell & t_k^\ell \end{pmatrix}^T$ if $p(g_k^\ell)$: projection to the shockwave w

$$\begin{pmatrix} p_x(g_k^\ell) \\ p_t(g_k^\ell) \end{pmatrix} = \frac{1}{u+w} \begin{bmatrix} 1 & u \\ -1 & w \end{bmatrix} \left(\begin{pmatrix} x_m \\ x_\ell^k \end{pmatrix} + \begin{bmatrix} w & 0 \\ 0 & -u \end{bmatrix} \begin{pmatrix} T_m^0 \\ t_k^\ell \end{pmatrix} \right)$$

Vehicle merging - summary

Finding intersections with congestion wave

Let $g_k^\ell = \begin{pmatrix} x_k^\ell & t_k^\ell \end{pmatrix}^T$ if $p(g_k^\ell)$: projection to the shockwave w

$$\begin{pmatrix} p_x(g_k^\ell) \\ p_t(g_k^\ell) \end{pmatrix} = \frac{1}{u+w} \begin{bmatrix} 1 & u \\ -1 & w \end{bmatrix} \left(\begin{pmatrix} x_m \\ x_\ell^k \end{pmatrix} + \begin{bmatrix} w & 0 \\ 0 & -u \end{bmatrix} \begin{pmatrix} T_m^0 \\ t_k^\ell \end{pmatrix} \right)$$

CAV

The *a-priori* order is obtained by organizing the full set of projections $\mathcal{P} = \{p(g_1^{\ell+}), \dots, p(g_{n+m}^{\ell+})\}$

Vehicle merging - summary

Finding intersections with congestion wave

Let $g_k^\ell = \begin{pmatrix} x_k^\ell & t_k^\ell \end{pmatrix}^T$ if $p(g_k^\ell)$: projection to the shockwave w

$$\begin{pmatrix} p_x(g_k^\ell) \\ p_t(g_k^\ell) \end{pmatrix} = \frac{1}{u+w} \begin{bmatrix} 1 & u \\ -1 & w \end{bmatrix} \left(\begin{pmatrix} x_m \\ x_\ell^k \end{pmatrix} + \begin{bmatrix} w & 0 \\ 0 & -u \end{bmatrix} \begin{pmatrix} T_m^0 \\ t_k^\ell \end{pmatrix} \right)$$

CAV


The *a-priori* order is obtained by organizing the full set of projections $\mathcal{P} = \{p(g_1^{\ell^+}), \dots, p(g_{n+m}^{\ell^+})\}$

Mixed case


The problem in this case can be as a resource allocation problem. Vehicles can be allocated between two internal boundary conditions j_k, j_{k+1} as:

$$\eta \leq \left\lfloor \left(\Delta \tau_{j_k, j_{k+1}}^f - 2\tau \right) / \tau_p \right\rfloor + 1$$


Transient Period

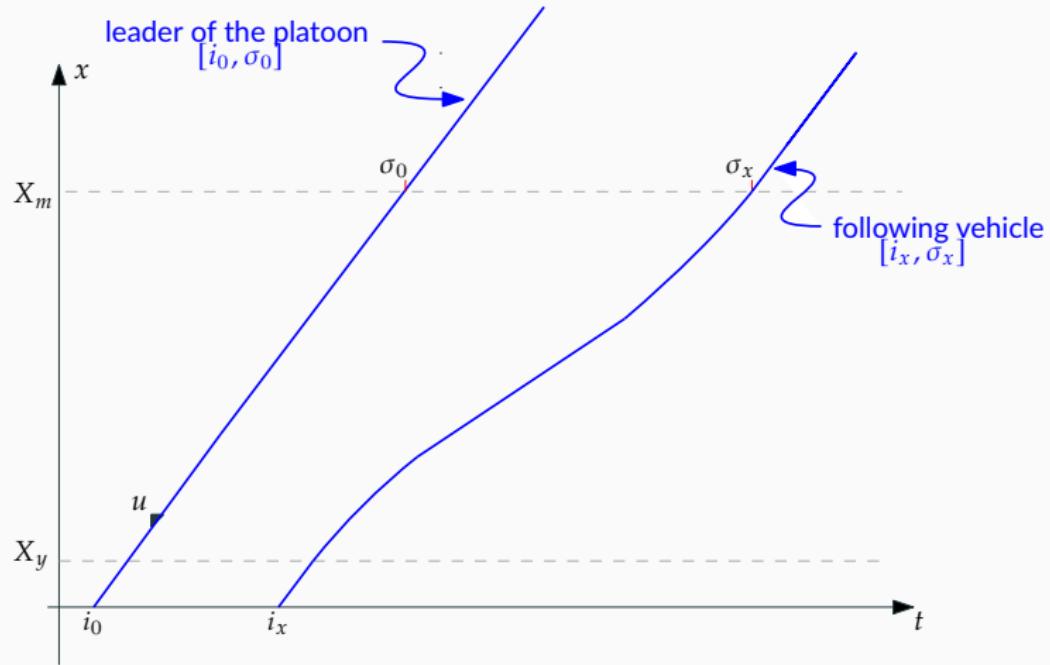


Transient Period

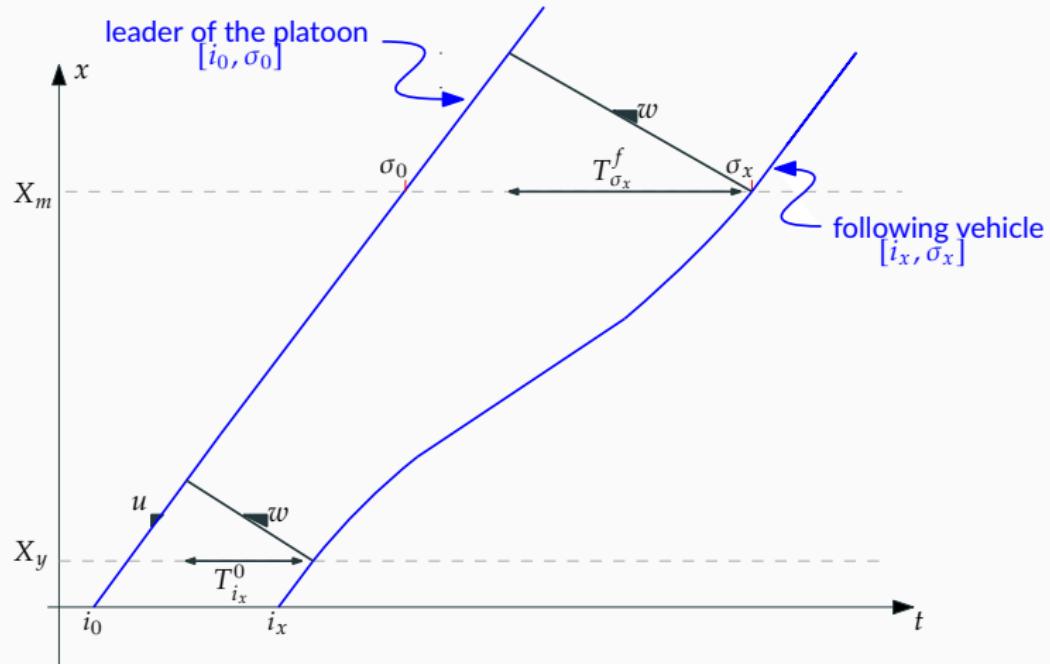


Transient Period

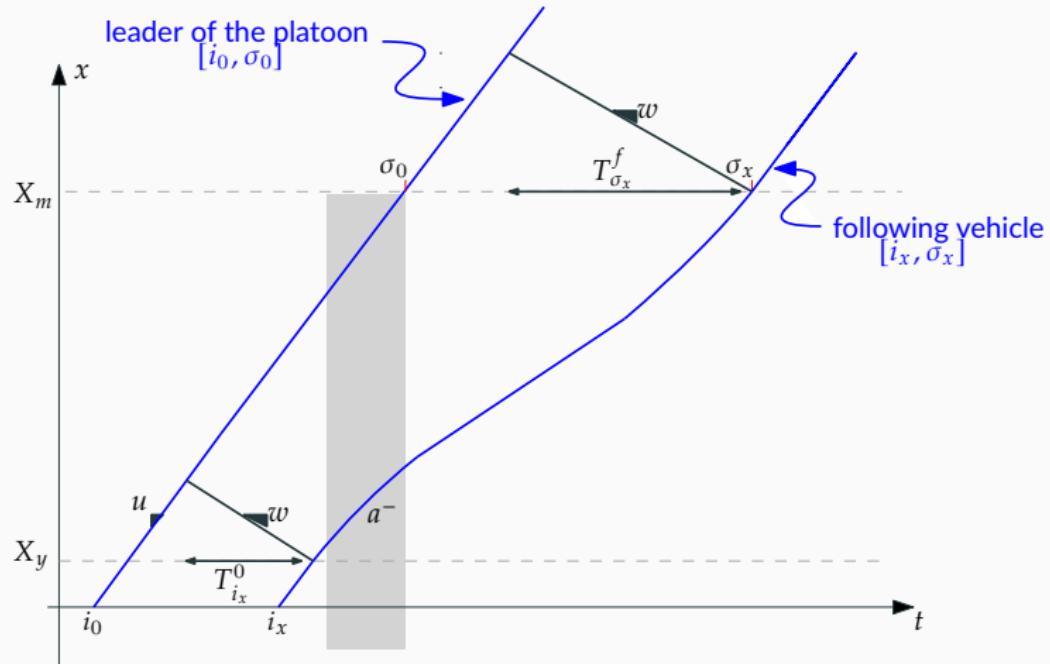


Transient Period

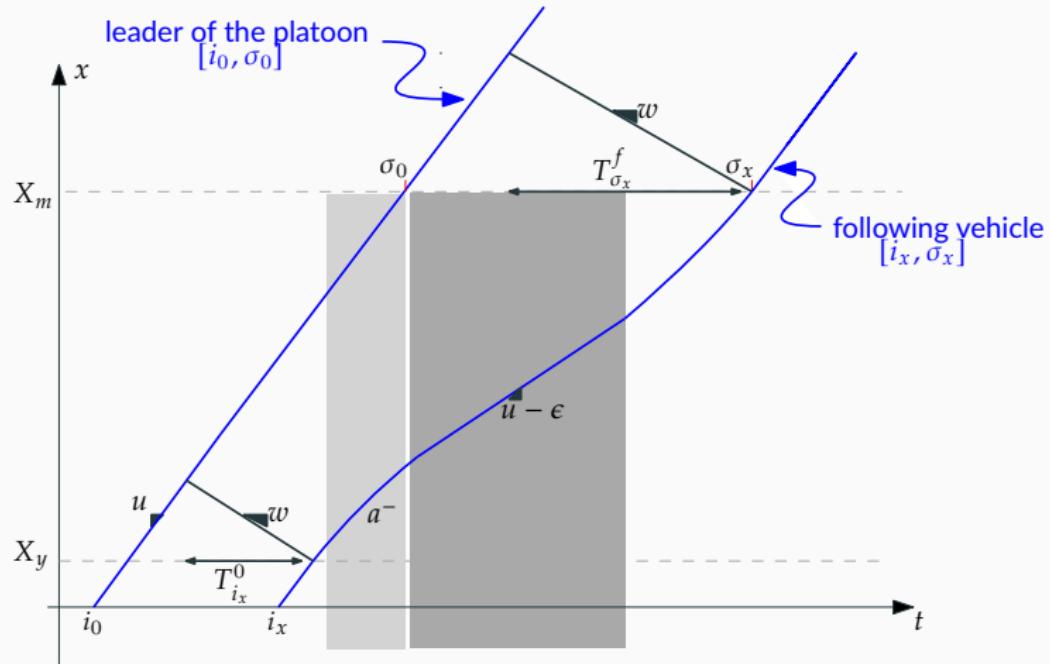

Transient Period

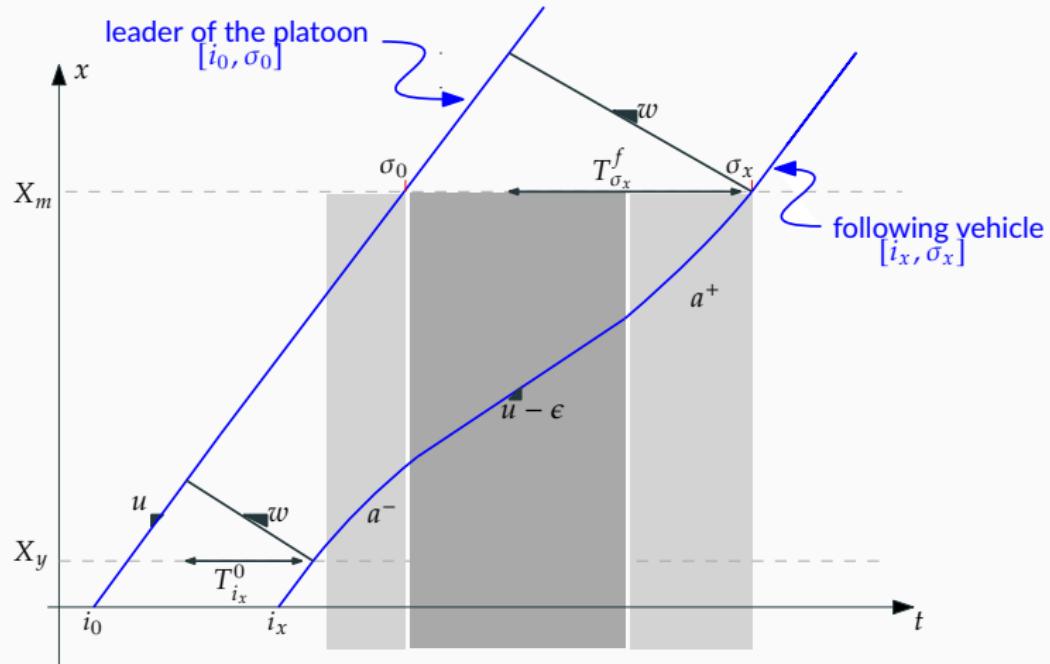

Transient Period

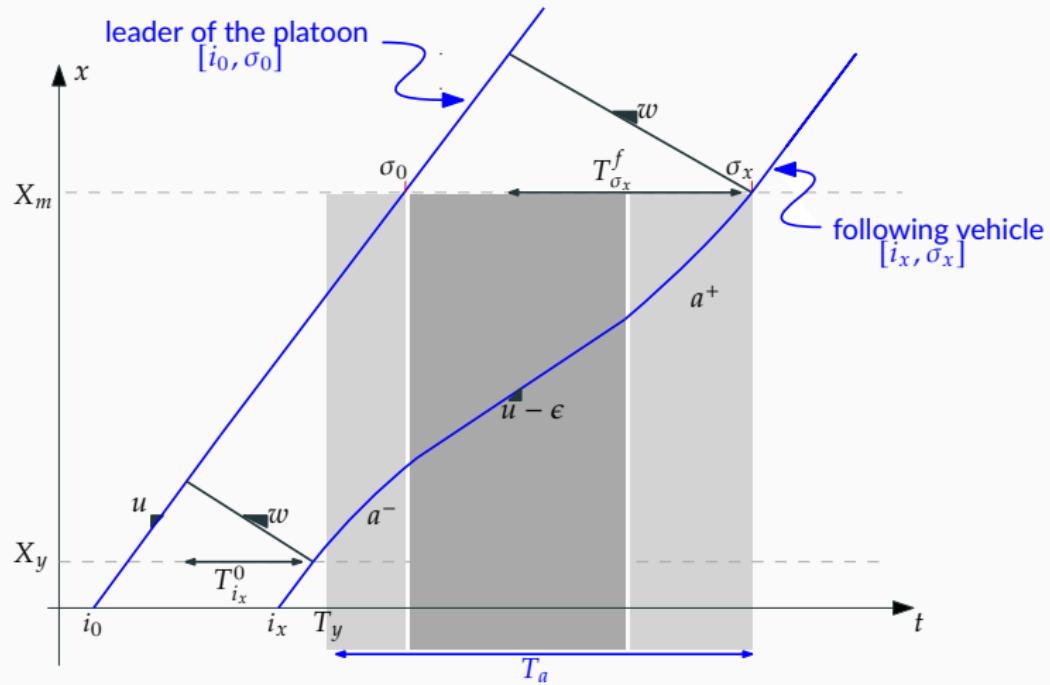

Transient period: Anticipation time

$$T_a = \frac{\epsilon}{2} \left(\frac{1}{a^+} - \frac{1}{a^-} \right) + \frac{u + w}{\epsilon} (T_{\sigma_x}^f - T_{\sigma_x}^0)$$

Parameter detail

Parameter Name	Description
$T_{\sigma_x}^f, T_{\sigma_x}^0$	Time shifts leader/follower

Transient period: Anticipation time

$$T_a = \frac{\epsilon}{2} \left(\frac{1}{a^+} - \frac{1}{a^-} \right) + \frac{u + w}{\epsilon} (T_{\sigma_x}^f - T_{\sigma_x}^0)$$

Parameter detail

Parameter Name	Description
$T_{\sigma_x}^f, T_{\sigma_x}^0$	Time shifts leader/follower
ϵ	Speed drop

Transient period: Anticipation time

$$T_a = \frac{\epsilon}{2} \left(\frac{1}{a^+} - \frac{1}{a^-} \right) + \frac{u+w}{\epsilon} (T_{\sigma_x}^f - T_{\sigma_x}^0)$$

Parameter detail

Parameter Name	Description
$T_{\sigma_x}^f, T_{\sigma_x}^0$	Time shifts leader/follower
ϵ	Speed drop
u, w	Free flow/ shockwave speeds

Transient period: Anticipation time

$$T_a = \frac{\epsilon}{2} \left(\frac{1}{a^+} - \frac{1}{a^-} \right) + \frac{u+w}{\epsilon} (T_{\sigma_x}^f - T_{\sigma_x}^0)$$

Parameter detail


Parameter Name	Description
$T_{\sigma_x}^f, T_{\sigma_x}^0$	Time shifts leader/follower
ϵ	Speed drop
u, w	Free flow/ shockwave speeds
a^+, a^-	Bounding accelerations

Table 1: Parameter dependence


Transient period: Decision chart

$$T_a = \frac{\epsilon}{2} \left(\frac{1}{a^+} - \frac{1}{a^-} \right) + \frac{u + w}{\epsilon} (T_{\sigma_x}^f - T_{\sigma_x}^0)$$

Anticipation Time

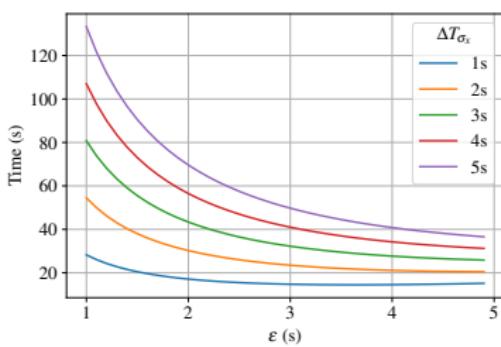

Speed drop

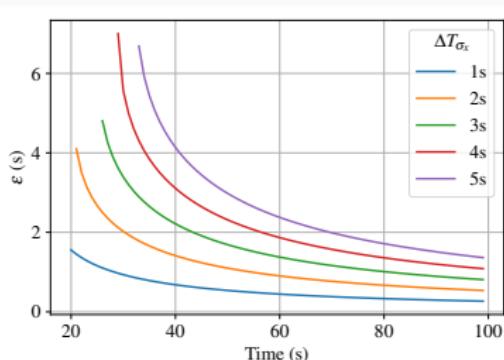

Operational layer

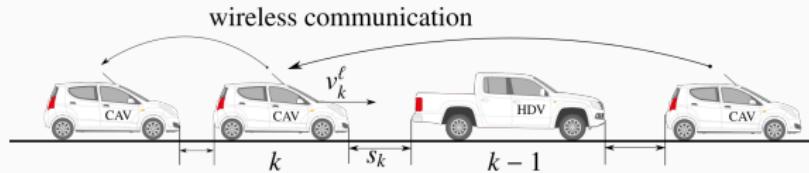


Figure 13: Mixed traffic scenario

- Available measurements for a vehicle:

Operational layer

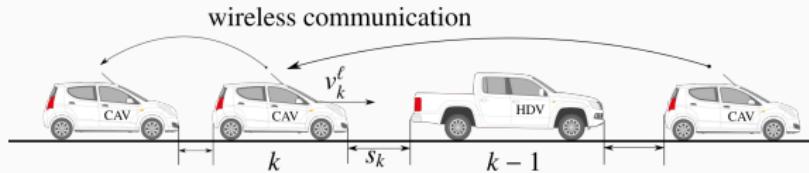


Figure 13: Mixed traffic scenario

- Available measurements for a vehicle:
 - s_k Headway space

Operational layer

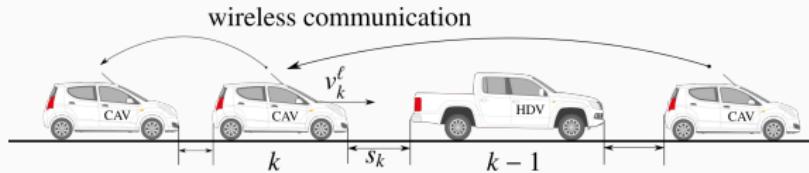


Figure 13: Mixed traffic scenario

- Available measurements for a vehicle:

s_k Headway space

v_k Vehicle's speed

Operational layer

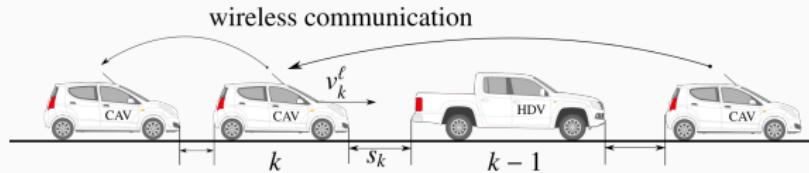


Figure 13: Mixed traffic scenario

- Available measurements for a vehicle:
 - s_k Headway space
 - v_k Vehicle's speed
 - v_{k-1} Leader's speed

Operational layer

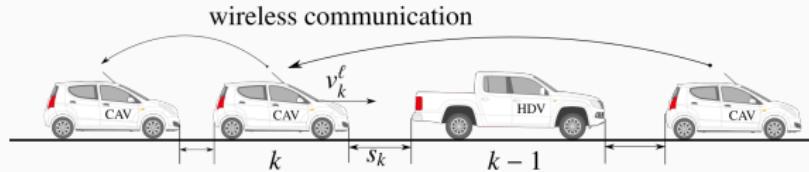


Figure 13: Mixed traffic scenario

- Available measurements for a vehicle:
 - s_k Headway space
 - v_k Vehicle's speed
 - v_{k-1} Leader's speed
- Consideration of 3rd order linear dynamics.

$$x_i(s) = \left(\frac{1}{s}\right) \left(\frac{1}{s+b}\right) \left(\frac{1/T_e}{s+1/T_e}\right)$$

Model Predictive Control

- Integration of optimality safety, comfort + model constraints.
- Predictive feature for CAVs until the merging position.

Model Predictive Control

- Integration of optimality safety, comfort + model constraints.
- Predictive feature for CAVs until the merging position.

Vehicle's dynamics

$$\dot{x}(t) = \frac{d}{dt} \begin{pmatrix} e_s & e_v \end{pmatrix} \rightarrow \text{LTI system} + a \in [a^-, a^+]$$

Model Predictive Control

- Integration of optimality safety, comfort + model constraints.
- Predictive feature for CAVs until the merging position.

Vehicle's dynamics

$$\dot{\mathbf{x}}(t) = \frac{d}{dt} \begin{pmatrix} \mathbf{e}_s & \mathbf{e}_v \end{pmatrix} \rightarrow \text{LTI system} + \mathbf{a} \in [a^-, a^+]$$

Cost function

$$\mathcal{L}(\mathbf{e}_s, \mathbf{e}_v, \mathbf{a}) = \sum_{k=1}^n \underbrace{c_1 (s_k - s_k^r)^2}_{\text{Safety}} + \underbrace{c_2 (v_{k-1} - v_k)^2}_{\text{Homogeneity}} + \underbrace{c_3 a_k^2}_{\text{Comfort}}$$

Note: For this case the control can eventually be distributed.

Full control strategy deployment

Decisions require T_a , amount of time and the desired time gap (headway space) that should be opened. Constant time gap policy $s = s_0 + hv$


Tactical Control Strategy:

- Compute $T_{a,k}$
- Compute $s_k^r(t) = s_k^0 + h_k(t)v_k(t)$

Note: Gap policy at equilibrium will depend on the leader after merge.

Full control strategy deployment

Decisions require T_a , amount of time and the desired time gap (headway space) that should be opened. Constant time gap policy $s = s_0 + hv$

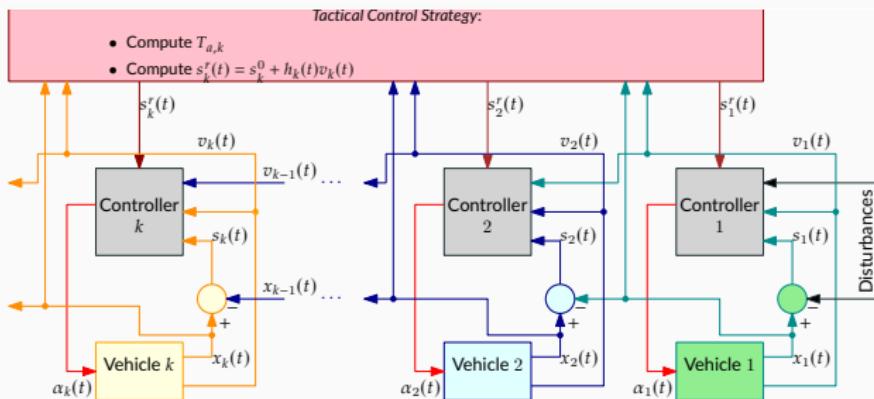

Note: Gap policy at equilibrium will depend on the leader after merge.

Experimental setup

Example Scenario

- Single merge
- 8 CAV vehicles on the main lane: Platoon in equilibrium conditions
- 2 HDV vehicles on the onramp: HDV in free flow condition

Operational layer performance

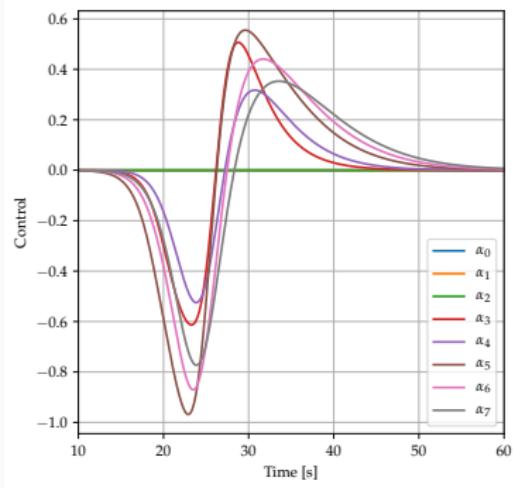


Figure 14: Control signal

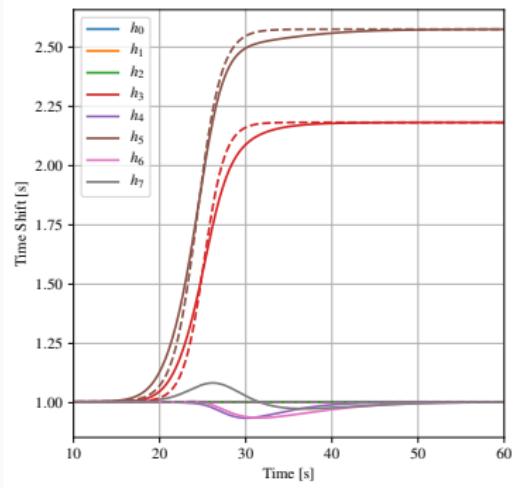


Figure 15: Time gap reference

Operational layer performance - model mismatch

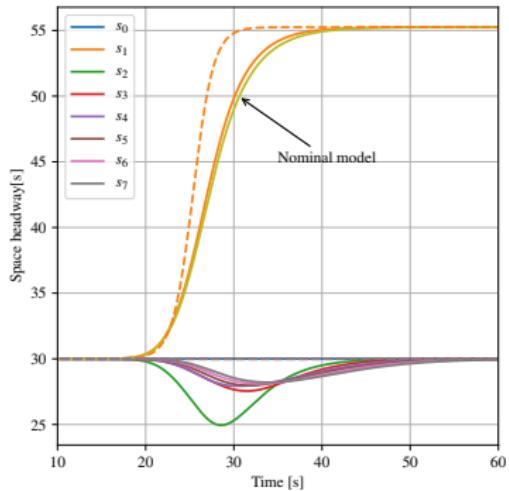


Figure 16: Vehicle's reference

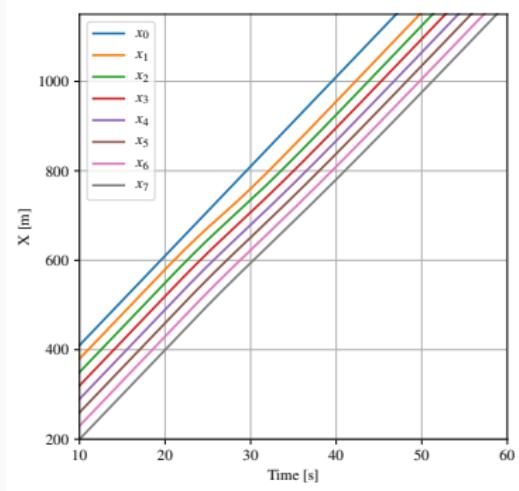


Figure 17: Space-time plane

Operational layer performance - Delay effects

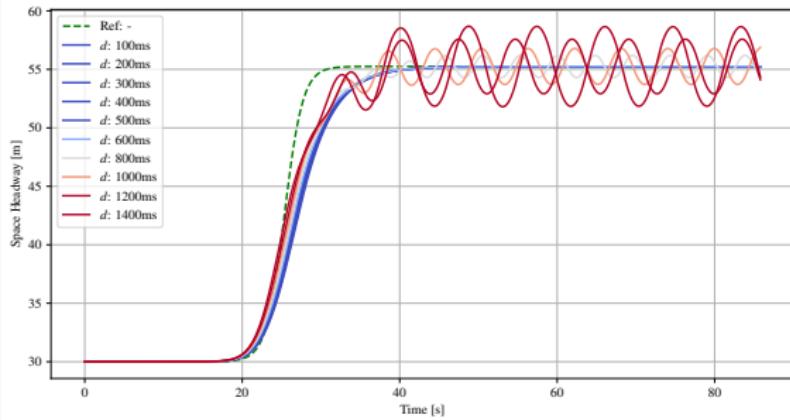


Figure 18: Vehicle's reference

Lag compensation in the actuator, via the cost function⁶.

⁶M. Wang et al. "Delay-compensating strategy to enhance string stability of adaptive cruise controlled vehicles". In: *Transportmetrica B* 6.3 (July 2018), pp. 211–229. ISSN: 21680582.

Case I - CAV scenario

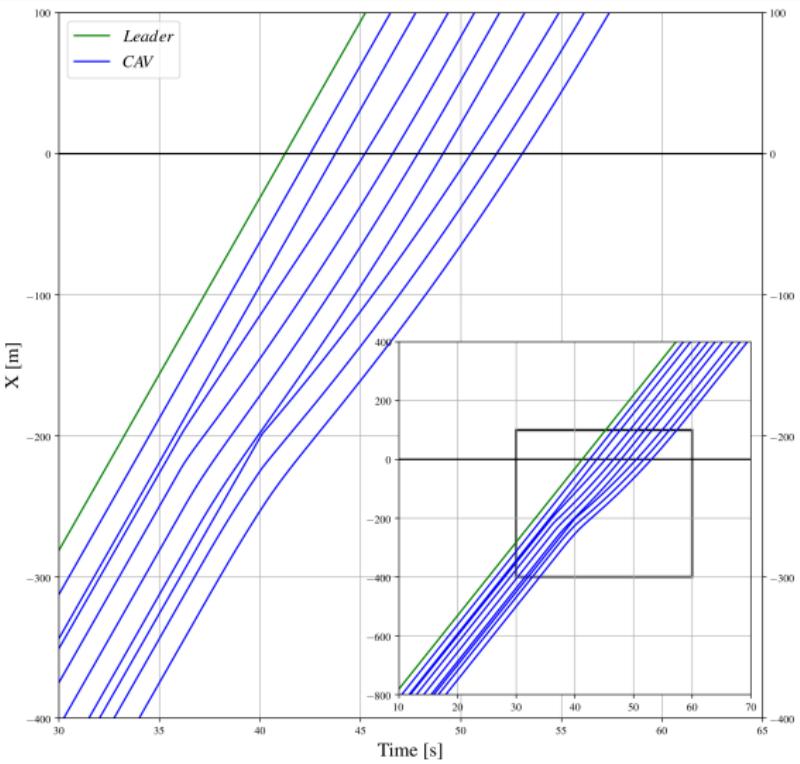


Figure 19: Mixed traffic scenario

Case II - Mixed traffic scenario

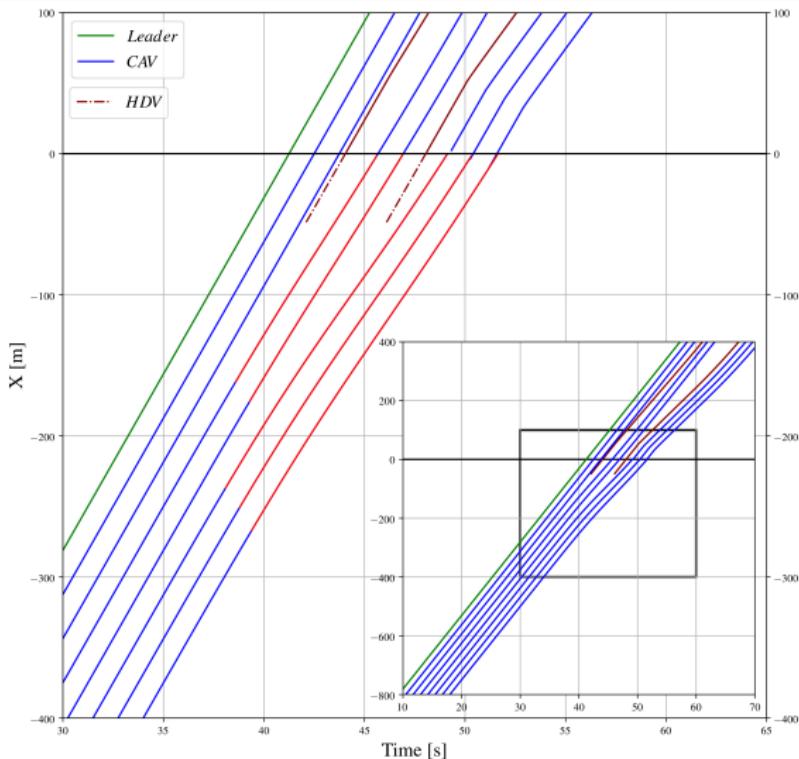


Figure 20: Mixed traffic scenario

Results

Yielding T_y and anticipation time T_a in seconds

Vehicle index i_k	Full CAV			Mixed scenario		
	T_y	T_a	$T_{\sigma_x}^f - T_{\sigma_x}^0$	T_y	T_a	$T_{\sigma_x}^f - T_{\sigma_x}^0$
i_3	37.1	9.16	1.0	37.3	8.83	0.91
i_5	39.6	9.18	0.0	36.4	13.77	1.18
j_1 (merging)	34.4	8.60	0.86	N/A	N/A	N/A
i_7	37.9	13.33	1.0	N/A	N/A	N/A
j_2 (merging)	38.0	11.99	0.81	N/A	N/A	N/A

Table 2: Vehicle index to be relaxed - Anticipation times

Conclusions & Observations

To takeaway

- Bi-level controllers: Flexible, suitable for integration.
- A method to safely split vehicle/truck platoons.
 - Safe + comfortable gap
 - Smooth trajectories
- A solution for low speed insertions empowered by anticipation.
- Formulation within an optimal framework.

Open problems

- Large flow considerations, in particular the combination.
- Merging point → Merging zones.
- Uncertainty within the tactical layer.

Questions?

References

-  Bressan, Alberto. *Non Cooperative Differential Games. A Tutorial.* Tech. rep. Penn State University, 2010, pp. 40–60.
-  Coclite, Giuseppe Maria and Benedetto Piccoli. “Traffic Flow on a Road Network”. In: *Society for Industrial and Applied Mathematics* 36.6 (Feb. 2002), pp. 1862–2886. ISSN: 0036-1410. arXiv: [0202146 \[math\]](https://arxiv.org/abs/math/0202146).
-  Daganzo, Carlos. “The cell transmission model: A dynamic representation of highway traffic consistent with the hydrodynamic theory”. In: *Transportation Research Part B: Methodological* 28.4 (1994), pp. 269–287.

-  Duret, A, A Ladino, and M Wang. "Hierarchical multi-injection strategy and platoon manoeuvres at network junctions". In: *2nd Symposium on Management of Future Motorway and Urban Traffic Systems*. Ed. by EU. Vol. 2. Ispra, 2018, pp. 11–13.
-  Duret, Aurelien, Meng Wang, and Andres Ladino. "A hierarchical approach for splitting truck platoons near network discontinuities". In: *Transportation Research Part B: Methodological* (Apr. 2019). ISSN: 01912615.
-  Duret, Aurélien, Jacques Bouffier, and Christine Buisson. "Onset of Congestion from Low-Speed Merging Maneuvers Within Free-Flow Traffic Stream". In: *Transportation Research Record: Journal of the Transportation Research Board* 2188 (2011), pp. 96–107. ISSN: 0361-1981.
-  Fabiani, Filippo and Sergio Grammatico. "A Mixed-Logical-Dynamical model for Automated Driving on highways". In: (Mar. 2018). arXiv: 1803.10678.

-  Grandinetti, Pietro. "Control of large-scale traffic networks". PhD thesis. INRIA, Gipsa-Lab: Université de Grenoble Alpes, Apr. 2017.
-  Grandinetti, Pietro, Carlos Canudas de Wit, and Federica Garin. "An efficient one-step-ahead optimal control for urban signalized traffic networks based on an averaged Cell-Transmission-Model". In: *2015 European Control Conference (ECC)*. July 2015, pp. 3478–3483.
-  Grandinetti, Pietro, Federica Garin, and Carlos Canudas de Wit. "Towards scalable optimal traffic control". In: *2015 54th IEEE Conference on Decision and Control (CDC)*. Oct. 2015, pp. 2175–2180.
-  INRIX. *Embouteillages : Une facture cumulée de plus de 350 milliards d'euros pour la France sur les 16 prochaines années*. <http://bit.ly/inrix-press-2014>. 2014.
 -  — .*Traffic Congestion in Europe: INRIX France Traffic Scorecard Provides Revealing Look at Traffic Congestion in Cities Nationwide* | INRIX. <http://inrix.com/press-releases/2661/>. 2016.

-  Ntousakis, Ioannis A., Ioannis K. Nikolos, and Markos Papageorgiou. "Optimal vehicle trajectory planning in the context of cooperative merging on highways". In: *Transportation Research Part C: Emerging Technologies* 71 (Oct. 2016), pp. 464–488. ISSN: 0968090X.
-  Rios-Torres, Jackeline and Andreas A. Malikopoulos. "A Survey on the Coordination of Connected and Automated Vehicles at Intersections and Merging at Highway On-Ramps". In: *IEEE Transactions on Intelligent Transportation Systems* 18.5 (2017), pp. 1066–1077. ISSN: 15249050.
 -  — . "Automated and Cooperative Vehicle Merging at Highway On-Ramps". In: *IEEE Transactions on Intelligent Transportation Systems* 18.4 (2017), pp. 780–789. ISSN: 15249050.
-  Wang, M. et al. "Delay-compensating strategy to enhance string stability of adaptive cruise controlled vehicles". In: *Transportmetrica B* 6.3 (July 2018), pp. 211–229. ISSN: 21680582.

- 
- Wang, Meng et al. "Game theoretic approach for predictive lane-changing and car-following control". In: *Transportation Research Part C: Emerging Technologies* 58 (2015), pp. 73–92. ISSN: 0968090X.