

Main supply input (VDD_IN)

Current BOM input voltage range: 12 – 24 V


Future BOM support: up to 48 V

The maximum supported input voltage depends on the selected protection and passive components.

+6V Intended for optional RC servo outputs



+5V Logic supply voltage

Dedicated high-current busbar connectors

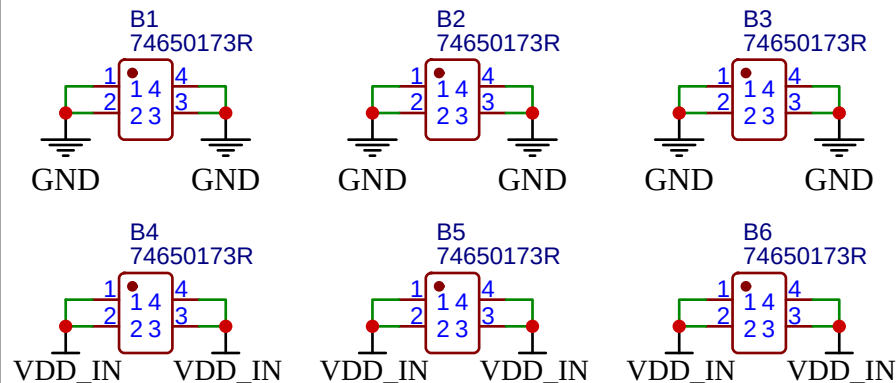

VDD_IN

Distributed bulk capacitors along the main power bus

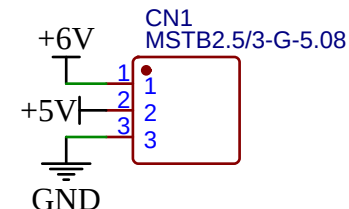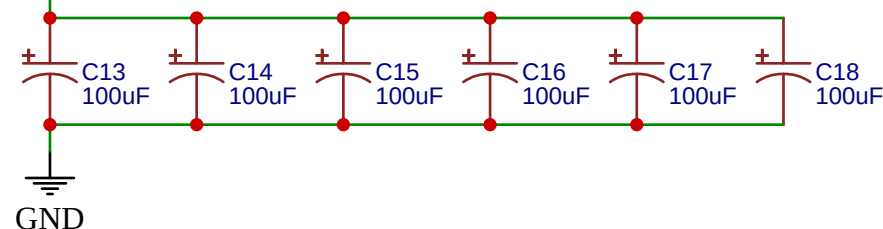

TITLE:

Power Input

REV: 3.1



Company:

Sheet: 2/13

Date: 2026-07-19

Drawn By: Alan Kudelko